

**PRODUCT SUMMARY**

# SKY74702: Transmitter for CDMA Applications

## Applications

- CDMA phones in the cellular band:
  - CDMA-US
  - CDMA-Japan

## Features

- Serial bus interface control
- Low power consumption in all operating modes
- Image reject upconverter replaces external RF SAW filter
- Transmit power control with 90 dB dynamic range
- Variable gain RF block for improved in-band SNR
- VHF VCO (external tank), 200 to 700 MHz
- VHF VCO switching to increase the talk time of the radio
- Two separate PLL synthesizers provide dual-loop, multi-band operation and power-save mode for both standby and lower frequency of operation
- Fully programmable PLL dividers and selectable charge pump currents for multi-VCO applications
- Transmit puncture pin disables programmable portions of device
- RFLGA™ (40-pin, 6 x 6 x 1 mm) package with downset paddle

## Description

The SKY74702 device is a single-supply, monolithic integrated circuit. It is designed for use in single-mode Code Division Multiple Access (CDMA) cellular voice/data applications including extensions for CDMA-Japan.


The SKY74702 is a highly integrated superheterodyne transmitter that incorporates the following components:

- In-Phase and Quadrature (I/Q) modulator – accepts the analog I and Q current outputs from the baseband analog processor and converts them to Intermediate Frequency (IF) signals
- Voltage Controlled Oscillator (VCO) and VHF synthesizer – generates the LO signal for the quadrature modulator
- UHF synthesizer – controls the UHF oscillator
- Variable Gain Amplifier (VGA) – provides the variable output power for CDMA systems
- Image reject upconverter and power amplifier (PA) drivers

The signal enters the chip as a baseband I/Q signal, which is upconverted by an I/Q quadrature modulator. The resulting signal is fed through a VGA to provide variable output power. After leaving the open collector output of the VGA, the signal enters a switch matrix. This switch matrix allows the signal to be routed through an external filter, or it can be filtered by the tuned collector load and passed directly to the UHF image reject mixer.


The image reject mixer is internally connected to the PA driver. The mixer driver combination has a variable gain control that can be used to reduce the RF gain, which improves the in-band Signal-to-Noise Ratio (SNR) at a lower output power. The PA driver amplifies the RF signal to the appropriate level for the desired output power. This is then filtered by a bandpass filter and sent to an external PA to obtain the final rated output power at the antenna.

The device package and pinout for the 40-pin RF Land Grid Array (RFLGA) are shown in Figure 1. A block diagram of the SKY74702 is shown in Figure 2.

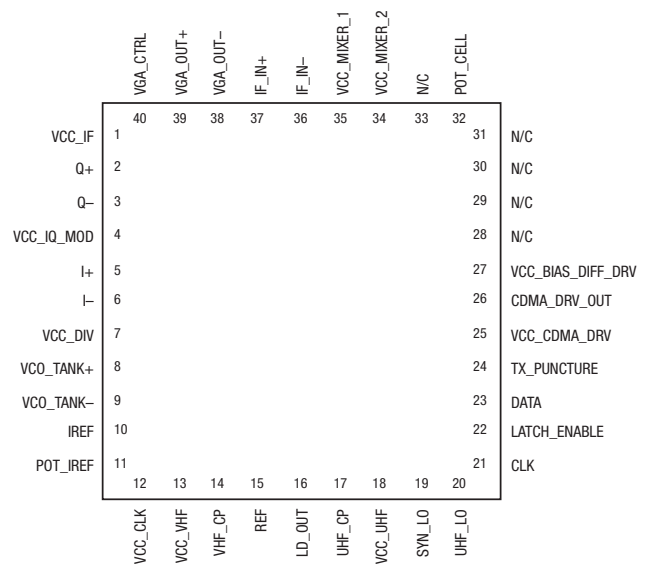

**Figure 1. SKY74702 Pinout – 40-Pin RFLGA Package (Top View)**

S304

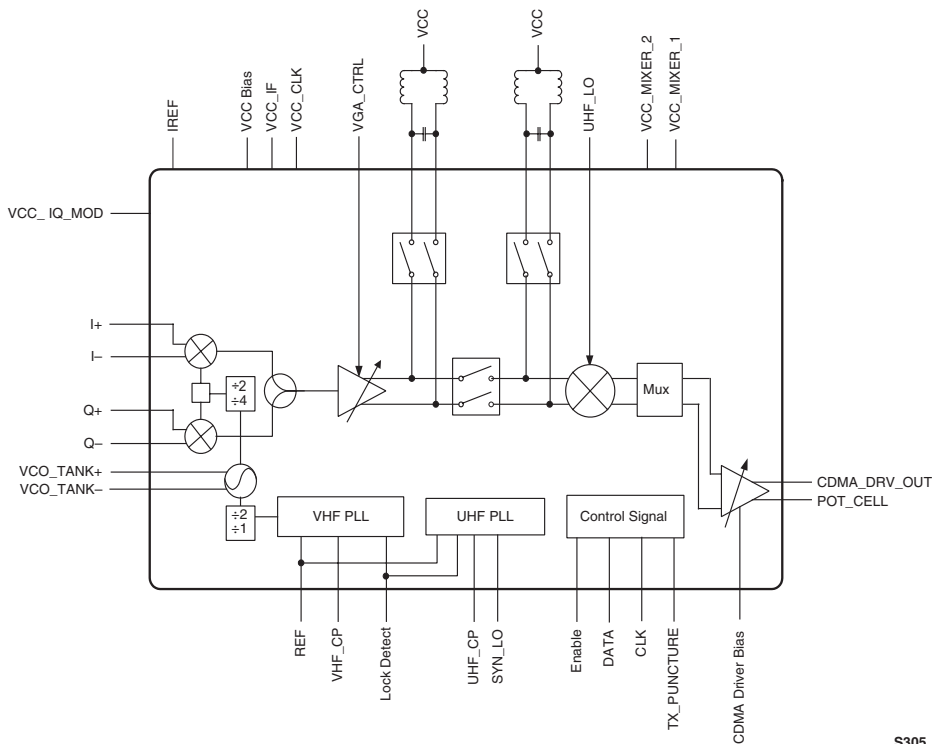

S305

Figure 2. SKY74702 Transmitter Block Diagram

## Ordering Information

Model Name	Manufacturing Part Number	Product Revision
SKY74702 CDMA Transmitter	SKY74702-11	

Copyright © 2003, 2004, 2005 Skyworks Solutions, Inc. All Rights Reserved.

Information in this document is provided in connection with Skyworks Solutions, Inc. ("Skyworks") products. These materials are provided by Skyworks as a service to its customers and may be used for informational purposes only by the customer. Skyworks assumes no responsibility for errors or omissions in these materials. Skyworks may make changes to its documentation, products, specifications and product descriptions at any time, without notice. Skyworks makes no commitment to update the information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from future changes to its documentation, products, specifications and product descriptions.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by or under this document. Except as may be provided in Skyworks' Terms and Conditions of Sale for such products, Skyworks assumes no liability whatsoever in association with its documentation, products, specifications and product descriptions.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED OR OTHERWISE, RELATING TO SALE AND/OR USE OF SKYWORKS PRODUCTS INCLUDING WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. SKYWORKS FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. SKYWORKS SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THESE MATERIALS WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Skyworks products are not intended for use in medical, lifesaving or life-sustaining applications. Skyworks' customers using or selling Skyworks products for use in such applications do so at their own risk and agree to fully indemnify Skyworks for any damages resulting from such improper use or sale.

The following are trademarks of Skyworks Solutions, Inc.: Skyworks®, the Skyworks logo, and Breakthrough Simplicity®. Product names or services listed in this publication are for identification purposes only, and may be trademarks of Skyworks or other third parties. Third-party brands and names are the property of their respective owners. Additional information, posted at [www.skyworksinc.com](http://www.skyworksinc.com), is incorporated by reference.