

SANYO**LA6537M****4-channel Bridge Driver
for CD and CD-ROMs****Overview**


The LA6537M is a 4-channel bridge (BTL) driver which was developed for compact discs and CD-ROMs.

Features and Functions

- 4-channel bridge (BTL) power amplifier.
- I_O max 700 mA.
- With mute circuit (Amp 3, Amp 4).


Package Dimensions

unit : mm

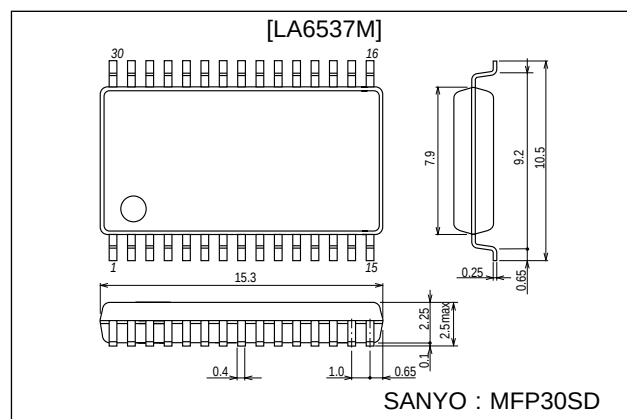3073A-MFP30SD**Specifications****Maximum Ratings at $T_a = 25^\circ\text{C}$**

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V_{CC} max		14	V
Maximum input voltage	V_{INB}		13	V

Continued on next page.

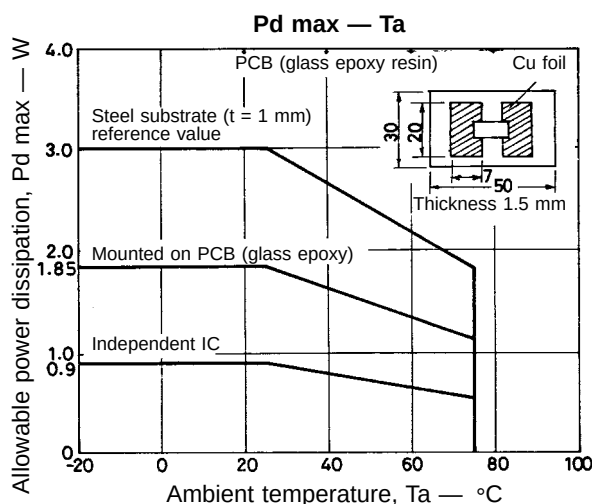

- Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.
- SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

SANYO Electric Co.,Ltd. Semiconductor Company

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

92995HA(II) No.5231-1/5

LA6537M

Continued from preceding page.

Parameter	Symbol	Conditions	Ratings	Unit
Mute pin voltage	V_M		13	V
Allowable power dissipation	$P_d \text{ max}$	* Mounted on PCB shown below	0.9	W
Operating temperature	T_{opr}		-20 to +75	°C
Storage temperature	T_{stg}		-55 to +150	°C

* PCB (20 × 30 × 1.5 mm glass epoxy resin)

Operating Conditions at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Recommended supply voltage	V_{CC}		4 to 13	V

Electrical Characteristics at $T_a = 25^\circ\text{C}$, $V_{CC} = 7.5\text{ V}$

Parameter	Symbol	Conditions	min	typ	max	Unit
No-load current drain	I_{CC1}	Note 1	20	40	60	mA
	I_{CC2}	Note 2		26	60	mA
Output offset voltage	V_{OF1}	Note 3, amplifiers 1 — 2, 7 — 8	-50		+50	mV
	V_{OF2}	Note 3, amplifiers 3 — 4, 5 — 6	-50		+50	mV
Input bias current	I_B			100	500	nA
Buffer input voltage range	V_{BIN}		1.5	$V_{CC} - 1.5$		V
Input voltage range	V_{IN}		1.0	$V_{CC} - 1.5$		V
Output source voltage	V_{O1}	Note 4, $R_L = 8.0\ \Omega$	5.0	5.6		V
Output sink voltage	V_{O2}	Note 5, $R_L = 8.0\ \Omega$		1.8	2.4	V
Closed-circuit voltage gain	VG	Bridge amplifier		12		dB
Slew rate	SR			0.15		V/ μs
Mute on voltage	V_M	Note 6		2		V
Mute pin inflow current	I_M	Note 6		60		μA

Notes:

1. Mute off and buffer in assume $1/2 V_{CC}$ V.
2. Mute off and buffer in assume 0.5 V.
3. Represents the interoutput difference.
4. Voltage relative to ground (source) when an $8\ \Omega$ load is connected between bridge amplifier outputs.
5. Voltage relative to ground (sink) when an $8\ \Omega$ load is connected between bridge amplifier outputs.
6. Muting is activated when high, and the amplifier outputs 3 and 4 are off.


Test Method

SW No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Item														
I_{CC1}	a	ON	ON	OFF	OFF	b	b	OFF	ON	OFF	OFF	b	OFF	OFF
I_{CC2}	a	ON	ON	OFF	OFF	b	b	OFF	ON	OFF	OFF	a	OFF	OFF
$V_{OF1,2}$	b	ON	ON	OFF	OFF	b	b	OFF	ON	OFF	OFF	b	OFF	OFF
I_B	b	OFF	OFF	ON	OFF	a	a	ON	OFF	OFF	OFF	b	OFF	OFF
V_{O1}	b	OFF	ON	OFF	ON	b	a	OFF	OFF	OFF	ON	b	OFF	OFF
V_{O2}	b	OFF	OFF	OFF	OFF	a	b	OFF	ON	ON	ON	b	OFF	OFF
V_M	b	ON	ON	OFF	OFF	b	b	OFF	ON	OFF	OFF	b	OFF	OFF
I_M	b	ON	ON	OFF	OFF	b	b	OFF	ON	OFF	OFF	b	OFF	OFF
VG	b	ON	ON	OFF	OFF	b	b	OFF	ON	OFF	OFF	b	ON	ON

1. For I_{CC1} and 2, measure the inflow current on the V_{CC} pin.
2. For V_{OF1} and 2, measure the voltage between pins 3 and 4 (amplifiers 1 and 2), pins 27 and 28 (amplifiers 7 and 8), pins 12 and 13 (amplifiers 3 and 4), and pins 18 and 19 (amplifiers 5 and 6).
3. For I_B , measure the voltage across the $100\ \text{k}\Omega$ resistor ($I_B = V/100\ \text{k}\Omega$).
4. For V_{O1} and 2, measure each output voltage at input voltages 1.75 V and 5.75 V, respectively.
5. V_M is the mute pin (pin 7) voltage when the output goes off.
6. I_M is the mute pin (pin 7) inflow current when the output goes off.
7. For VG, measure the voltage between pins 3 and 4 (amplifiers 1 and 2), pins 27 and 28 (amplifiers 7 and 8), pins 12 and 13 (amplifiers 3 and 4), and pins 18 and 19 (amplifiers 5 and 6) at $f = 1\ \text{kHz}$, and use the following formula:


$$VG = 20 \log V_O/V_1\ \text{dB}.$$

Test Circuit

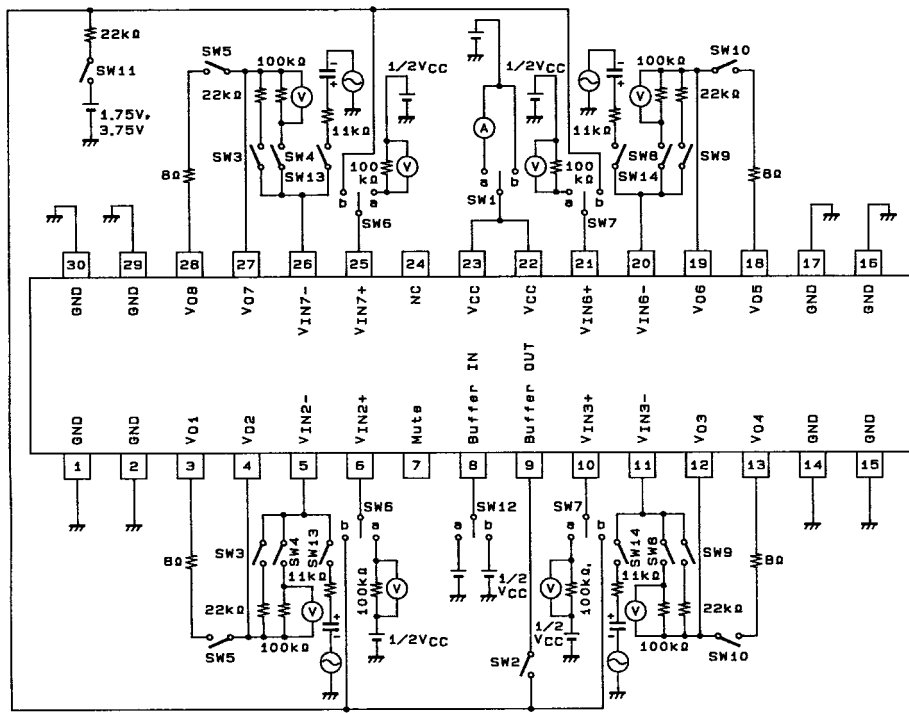

A04481

Block Diagram and Pin Assignment

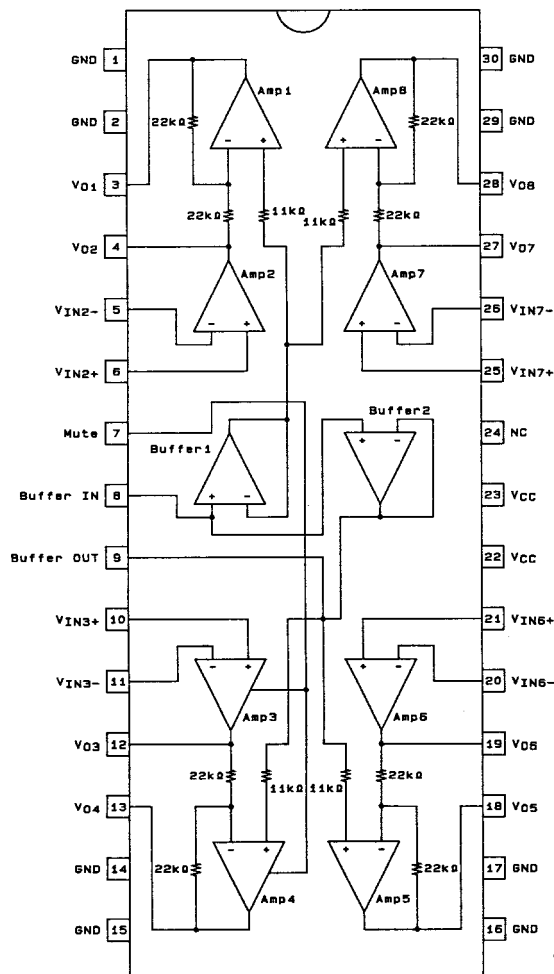


Top view

A04482

Do not use the NC pin.

Sample Application Circuit

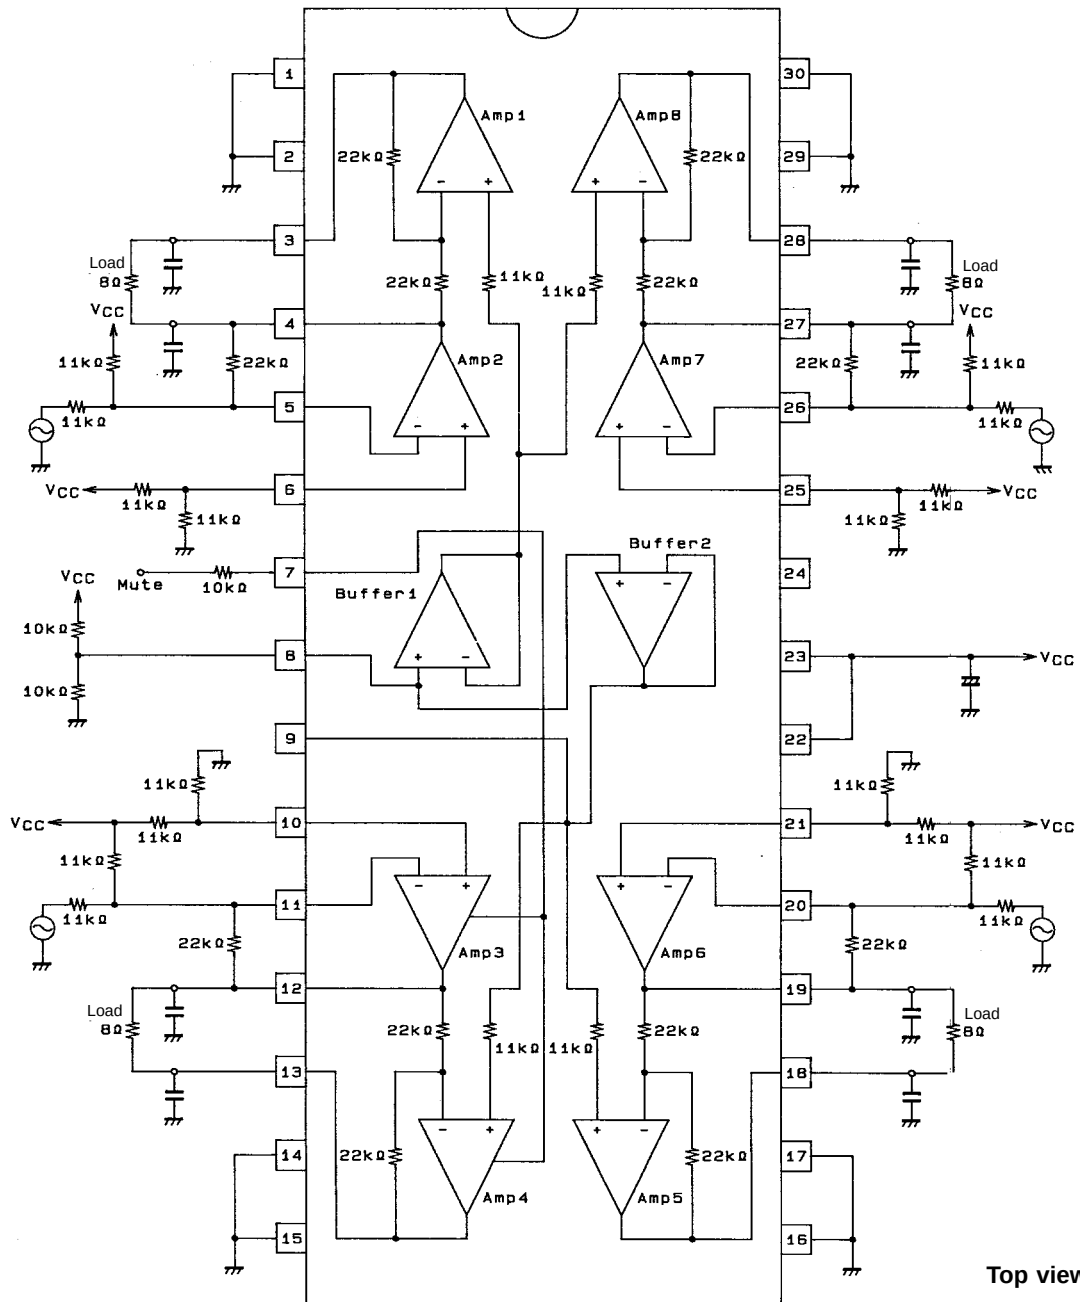

Top view

A04483

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products(including technical data,services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of September, 1995. Specifications and information herein are subject to change without notice.