

NPN SILICON RF TRANSISTOR FOR LOW NOISE · HIGH-GAIN AMPLIFICATION 3-PIN ULTRA SUPER MINIMOLD

FEATURES

- Suitable for high-frequency oscillation
- $f_T = 25$ GHz technology adopted
- 3-pin ultra super minimold

ORDERING INFORMATION

| Part Number | Quantity | Supplying Form |
|-------------|-------------------|--|
| 2SC5606 | 50 pcs (Non reel) | <ul style="list-style-type: none"> • 8 mm wide embossed taping • Pin 3 (collector) face the perforation side of the tape |
| 2SC5606-T1 | 3 kpcs/reel | |

Remark To order evaluation samples, consult your NEC sales representative (Unit sample quantity is 50 pcs).

ABSOLUTE MAXIMUM RATINGS ($T_A = +25$ °C)

| Parameter | Symbol | Ratings | Unit |
|------------------------------|------------------|-------------|------|
| Collector to Base Voltage | V_{CBO} | 15 | V |
| Collector to Emitter Voltage | V_{CEO} | 3.3 | V |
| Emitter to Base Voltage | V_{EBO} | 1.5 | V |
| Collector Current | I_C | 35 | mA |
| Total Power Dissipation | P_{tot}^{Note} | 115 | mW |
| Junction Temperature | T_j | 150 | °C |
| Storage Temperature | T_{stg} | -65 to +150 | °C |

★ **Note** Mounted on $1.08 \text{ cm}^2 \times 1.0 \text{ mm}$ (t) glass epoxy substrate

Because this product uses high-frequency technology, avoid excessive static electricity, etc.

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.
Not all devices/types available in every country. Please check with local NEC representative for availability and additional information.

ELECTRICAL CHARACTERISTICS (T_A = +25 °C)

| Parameter | Symbol | Test Conditions | MIN. | TYP. | MAX. | Unit |
|------------------------------|-----------------------------------|---|------|------|------|------|
| DC Characteristics | | | | | | |
| Collector Cut-off Current | I _{CB0} | V _{CB} = 5 V, I _E = 0 mA | – | – | 200 | nA |
| Emitter Cut-off Current | I _{EB0} | V _{EB} = 1 V, I _C = 0 mA | – | – | 200 | nA |
| DC Current Gain | h _{FE} ^{Note 1} | V _{CE} = 2 V, I _C = 5 mA | 50 | 70 | 100 | – |
| RF Characteristics | | | | | | |
| Gain Bandwidth Product | f _T | V _{CE} = 2 V, I _C = 20 mA, f = 2 GHz | – | 21 | – | GHz |
| Insertion Power Gain | S _{21e} ² | V _{CE} = 2 V, I _C = 20 mA, f = 2 GHz | 10 | 12.5 | – | dB |
| Noise Figure | NF | V _{CE} = 2 V, I _C = 5 mA, f = 2 GHz, Z _S = Z _{opt} | – | 1.2 | 1.5 | dB |
| Reverse Transfer Capacitance | C _{re} ^{Note 2} | V _{CB} = 2 V, I _E = 0 mA, f = 1 MHz | – | 0.21 | 0.3 | pF |
| Maximum Available Gain | MAG. ^{Note 3} | V _{CE} = 2 V, I _C = 20 mA, f = 2 GHz | – | 14 | – | dB |
| Maximum Stable Power Gain | MSG. ^{Note 4} | V _{CE} = 2 V, I _C = 20 mA, f = 2 GHz | – | 15 | – | dB |

Note 1. Pulse measurement: PW ≤ 350 μs, Duty Cycle ≤ 2 %

2. Collector to base capacitance measured using capacitance meter (self-balancing bridge method) when the emitter is connected to the guard pin

$$3. \text{MAG.} = \left| \frac{S_{21}}{S_{12}} \right| (k - \sqrt{k^2 - 1})$$


$$4. \text{MSG.} = \left| \frac{S_{21}}{S_{12}} \right|$$

h_{FE} CLASSIFICATION


| | |
|-----------------|-----------|
| Rank | FB |
| Marking | UA |
| h _{FE} | 50 to 100 |

★ TYPICAL CHARACTERISTICS (Unless otherwise specified, $T_A = +25\text{ }^\circ\text{C}$)


TOTAL POWER DISSIPATION vs. AMBIENT TEMPERATURE

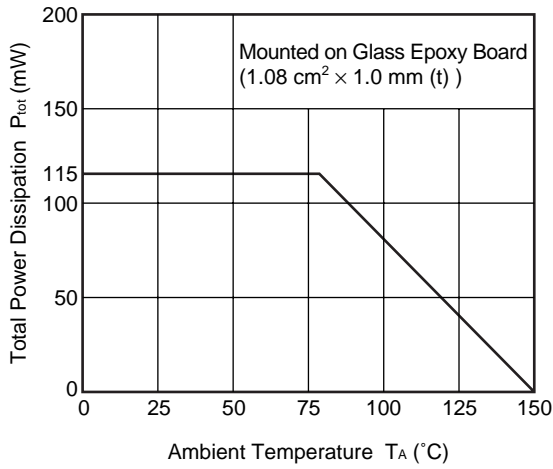


REVERSE TRANSFER CAPACITANCE vs. COLLECTOR TO BASE VOLTAGE

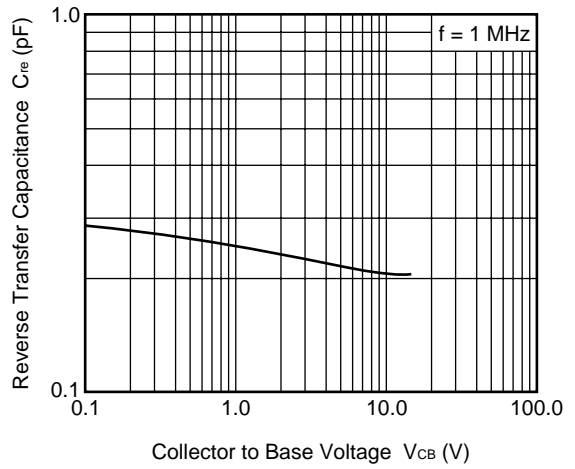


COLLECTOR CURRENT vs. BASE TO EMITTER VOLTAGE

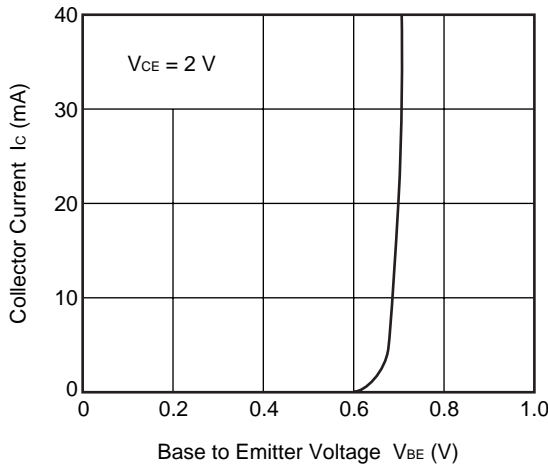


COLLECTOR CURRENT vs. COLLECTOR TO EMITTER VOLTAGE

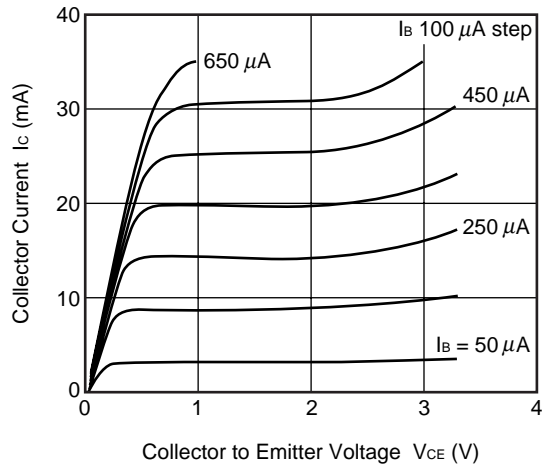


DC CURRENT GAIN vs. COLLECTOR CURRENT

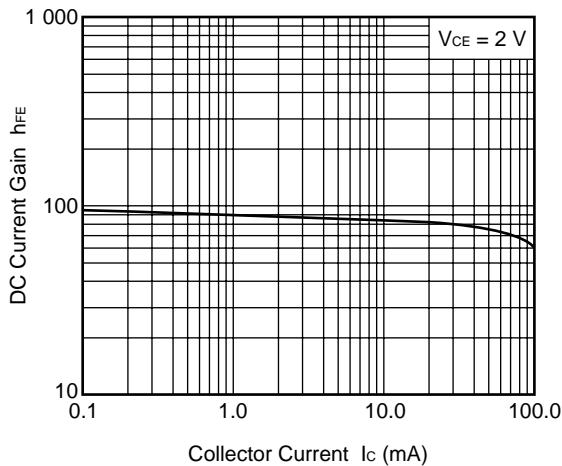


GAIN BANDWIDTH PRODUCT vs. COLLECTOR CURRENT

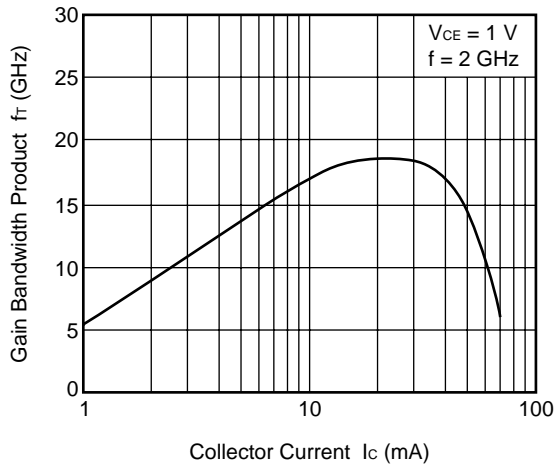


GAIN BANDWIDTH PRODUCT vs. COLLECTOR CURRENT

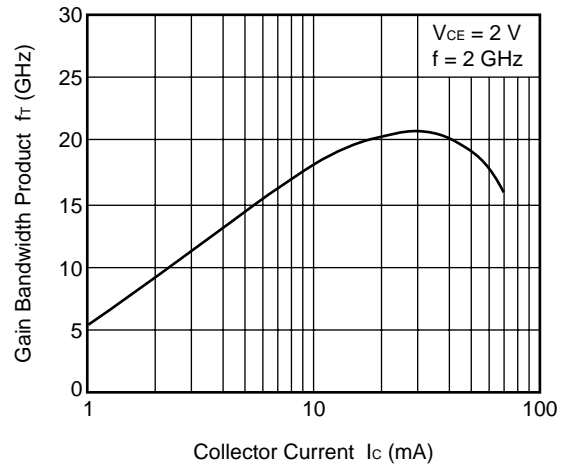


INSERTION POWER GAIN vs. FREQUENCY

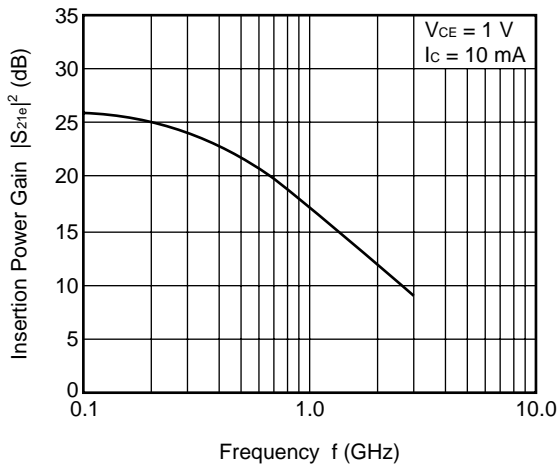


INSERTION POWER GAIN vs. FREQUENCY

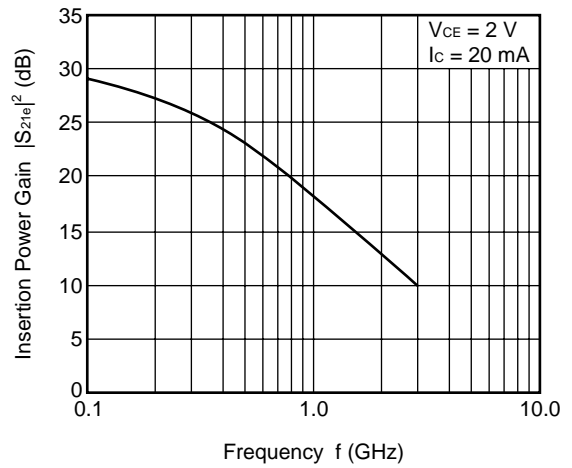


INSERTION POWER GAIN vs. COLLECTOR CURRENT

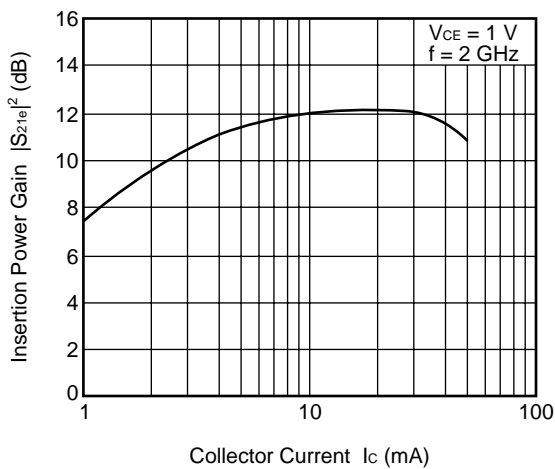

INSERTION POWER GAIN vs. COLLECTOR CURRENT

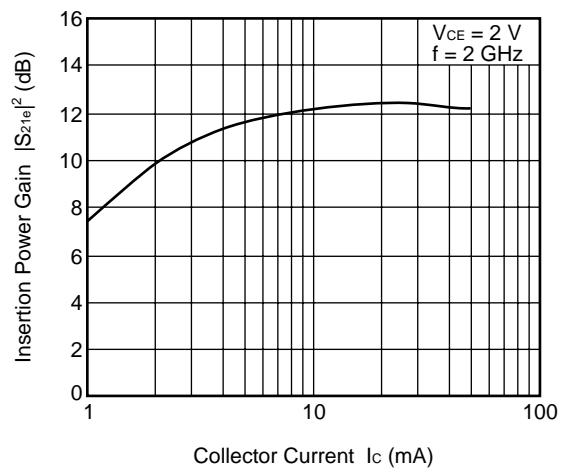

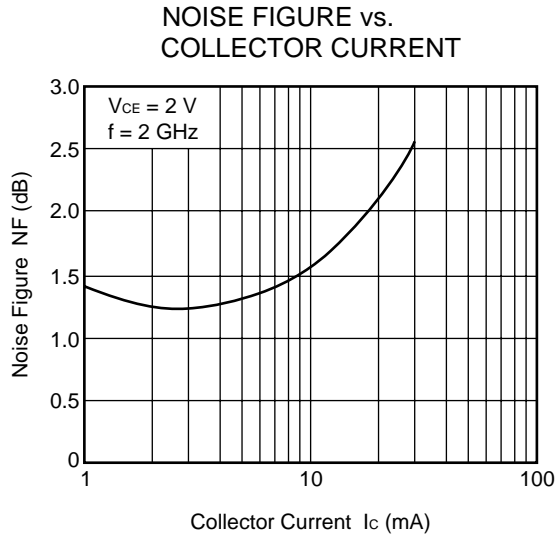

Remark The graphs indicate nominal characteristics.

S-PARAMETERS

V_{CE} = 3 V, I_C = 1 mA, Z_O = 50 Ω

| FREQUENCY MHz | S ₁₁ | | S ₂₁ | | S ₁₂ | | S ₂₂ | |
|------------------|-----------------|--------|-----------------|-------|-----------------|-------|-----------------|-------|
| | MAG. | ANG. | MAG. | ANG. | MAG. | ANG. | MAG. | ANG. |
| 100 | 0.938 | -7.9 | 3.872 | 174.6 | 0.010 | 121.9 | 0.996 | -3.2 |
| 200 | 0.894 | -11.5 | 3.499 | 166.9 | 0.019 | 53.1 | 0.976 | -8.3 |
| 300 | 0.871 | -17.9 | 3.458 | 162.4 | 0.041 | 81.7 | 0.958 | -11.3 |
| 400 | 0.881 | -22.6 | 3.292 | 156.6 | 0.049 | 78.6 | 0.918 | -13.4 |
| 500 | 0.855 | -29.1 | 3.270 | 151.8 | 0.054 | 73.4 | 0.888 | -15.6 |
| 600 | 0.837 | -34.1 | 3.189 | 147.3 | 0.071 | 67.7 | 0.887 | -18.2 |
| 700 | 0.825 | -40.0 | 3.106 | 142.4 | 0.078 | 58.5 | 0.884 | -20.7 |
| 800 | 0.789 | -44.5 | 3.023 | 137.3 | 0.078 | 62.0 | 0.852 | -22.5 |
| 900 | 0.768 | -48.9 | 2.956 | 134.2 | 0.086 | 53.0 | 0.832 | -25.6 |
| 1000 | 0.745 | -54.0 | 2.895 | 129.4 | 0.098 | 56.8 | 0.816 | -27.0 |
| 1100 | 0.726 | -59.4 | 2.827 | 124.9 | 0.105 | 59.1 | 0.790 | -28.8 |
| 1200 | 0.699 | -63.1 | 2.773 | 121.8 | 0.109 | 55.4 | 0.777 | -30.8 |
| 1300 | 0.673 | -67.8 | 2.705 | 117.8 | 0.114 | 51.3 | 0.765 | -31.7 |
| 1400 | 0.652 | -72.3 | 2.630 | 113.7 | 0.125 | 51.9 | 0.747 | -33.0 |
| 1500 | 0.622 | -76.6 | 2.555 | 110.5 | 0.123 | 49.8 | 0.723 | -34.3 |
| 1600 | 0.602 | -80.9 | 2.519 | 106.5 | 0.124 | 49.8 | 0.714 | -36.0 |
| 1700 | 0.568 | -86.7 | 2.455 | 103.3 | 0.130 | 47.1 | 0.687 | -37.6 |
| 1800 | 0.542 | -90.5 | 2.367 | 100.4 | 0.128 | 46.5 | 0.676 | -37.8 |
| 1900 | 0.523 | -96.0 | 2.368 | 97.2 | 0.136 | 46.4 | 0.656 | -39.1 |
| 2000 | 0.502 | -100.9 | 2.334 | 93.2 | 0.137 | 44.3 | 0.646 | -40.1 |
| 2100 | 0.477 | -106.3 | 2.268 | 89.6 | 0.142 | 44.2 | 0.632 | -41.7 |
| 2200 | 0.455 | -112.8 | 2.217 | 86.6 | 0.143 | 44.2 | 0.616 | -41.6 |
| 2300 | 0.438 | -118.0 | 2.178 | 83.9 | 0.151 | 45.7 | 0.602 | -43.3 |
| 2400 | 0.412 | -123.2 | 2.154 | 80.0 | 0.158 | 44.7 | 0.586 | -44.4 |
| 2500 | 0.401 | -130.9 | 2.122 | 77.5 | 0.157 | 43.6 | 0.571 | -46.2 |
| 2600 | 0.390 | -137.7 | 2.058 | 74.4 | 0.159 | 42.9 | 0.554 | -46.8 |
| 2700 | 0.375 | -143.1 | 2.007 | 71.2 | 0.161 | 41.4 | 0.536 | -47.9 |
| 2800 | 0.372 | -151.4 | 2.017 | 68.5 | 0.167 | 44.3 | 0.530 | -48.9 |
| 2900 | 0.361 | -159.1 | 1.952 | 66.2 | 0.162 | 43.3 | 0.507 | -49.6 |
| 3000 | 0.365 | -166.1 | 1.927 | 62.4 | 0.167 | 43.7 | 0.488 | -51.0 |

$V_{CE} = 3\text{ V}$, $I_c = 3\text{ mA}$, $Z_o = 50\ \Omega$

| FREQUENCY MHz | S ₁₁ | | S ₂₁ | | S ₁₂ | | S ₂₂ | |
|------------------|-----------------|--------|-----------------|-------|-----------------|------|-----------------|-------|
| | MAG. | ANG. | MAG. | ANG. | MAG. | ANG. | MAG. | ANG. |
| 100 | 0.842 | -9.3 | 9.149 | 170.1 | 0.024 | 38.9 | 0.990 | -7.2 |
| 200 | 0.808 | -17.2 | 8.180 | 161.7 | 0.027 | 36.6 | 0.951 | -11.0 |
| 300 | 0.766 | -25.1 | 8.015 | 154.8 | 0.040 | 71.0 | 0.903 | -15.8 |
| 400 | 0.731 | -30.1 | 7.427 | 146.9 | 0.044 | 69.5 | 0.853 | -19.7 |
| 500 | 0.688 | -38.6 | 7.174 | 140.4 | 0.043 | 76.1 | 0.811 | -21.9 |
| 600 | 0.653 | -44.3 | 6.752 | 135.2 | 0.054 | 64.8 | 0.789 | -25.0 |
| 700 | 0.618 | -51.0 | 6.404 | 128.7 | 0.062 | 66.1 | 0.766 | -27.7 |
| 800 | 0.584 | -55.0 | 6.103 | 124.1 | 0.071 | 61.0 | 0.734 | -29.0 |
| 900 | 0.550 | -61.0 | 5.845 | 119.1 | 0.073 | 52.8 | 0.685 | -32.5 |
| 1000 | 0.514 | -65.1 | 5.453 | 115.3 | 0.080 | 62.1 | 0.681 | -33.2 |
| 1100 | 0.479 | -70.2 | 5.197 | 110.6 | 0.088 | 60.6 | 0.638 | -34.0 |
| 1200 | 0.442 | -72.7 | 4.944 | 107.5 | 0.090 | 57.9 | 0.612 | -34.6 |
| 1300 | 0.418 | -76.7 | 4.713 | 103.9 | 0.090 | 58.9 | 0.599 | -36.4 |
| 1400 | 0.386 | -80.6 | 4.497 | 100.0 | 0.104 | 58.9 | 0.582 | -37.1 |
| 1500 | 0.359 | -84.7 | 4.241 | 97.3 | 0.106 | 55.3 | 0.561 | -37.9 |
| 1600 | 0.338 | -88.0 | 4.091 | 93.8 | 0.107 | 58.4 | 0.548 | -38.5 |
| 1700 | 0.310 | -93.1 | 3.946 | 91.1 | 0.113 | 57.4 | 0.534 | -39.4 |
| 1800 | 0.287 | -95.5 | 3.727 | 88.4 | 0.114 | 56.0 | 0.524 | -38.8 |
| 1900 | 0.261 | -102.1 | 3.649 | 85.9 | 0.124 | 56.3 | 0.504 | -40.6 |
| 2000 | 0.243 | -106.8 | 3.524 | 82.4 | 0.127 | 53.9 | 0.493 | -40.7 |
| 2100 | 0.224 | -110.0 | 3.371 | 80.2 | 0.137 | 56.3 | 0.481 | -41.6 |
| 2200 | 0.211 | -116.8 | 3.257 | 77.9 | 0.142 | 54.1 | 0.466 | -41.8 |
| 2300 | 0.194 | -123.0 | 3.178 | 75.0 | 0.143 | 55.2 | 0.456 | -42.8 |
| 2400 | 0.177 | -129.9 | 3.092 | 72.1 | 0.158 | 56.7 | 0.447 | -43.8 |
| 2500 | 0.168 | -135.7 | 2.991 | 70.4 | 0.160 | 53.5 | 0.438 | -45.5 |
| 2600 | 0.180 | -143.5 | 2.904 | 68.7 | 0.166 | 52.2 | 0.424 | -46.9 |
| 2700 | 0.173 | -154.5 | 2.829 | 65.0 | 0.168 | 52.4 | 0.399 | -47.8 |
| 2800 | 0.179 | -167.1 | 2.815 | 63.5 | 0.169 | 52.8 | 0.391 | -49.1 |
| 2900 | 0.168 | -178.0 | 2.718 | 61.1 | 0.175 | 52.7 | 0.370 | -48.5 |
| 3000 | 0.182 | 174.3 | 2.635 | 58.3 | 0.185 | 50.2 | 0.358 | -50.2 |

$V_{CE} = 3\text{ V}$, $I_c = 5\text{ mA}$, $Z_o = 50\ \Omega$

| FREQUENCY MHz | S ₁₁ | | S ₂₁ | | S ₁₂ | | S ₂₂ | |
|------------------|-----------------|--------|-----------------|-------|-----------------|--------|-----------------|-------|
| | MAG. | ANG. | MAG. | ANG. | MAG. | ANG. | MAG. | ANG. |
| 100 | 0.774 | -15.1 | 13.426 | 167.1 | 0.006 | -177.2 | 0.957 | -8.5 |
| 200 | 0.725 | -20.9 | 11.729 | 157.4 | 0.025 | 41.0 | 0.911 | -15.1 |
| 300 | 0.670 | -29.3 | 11.161 | 148.8 | 0.036 | 76.9 | 0.865 | -20.2 |
| 400 | 0.618 | -36.0 | 10.162 | 139.9 | 0.048 | 77.3 | 0.796 | -23.0 |
| 500 | 0.579 | -43.0 | 9.497 | 133.4 | 0.045 | 70.8 | 0.754 | -25.2 |
| 600 | 0.518 | -49.2 | 8.711 | 127.0 | 0.051 | 75.4 | 0.719 | -28.2 |
| 700 | 0.491 | -54.8 | 8.150 | 121.3 | 0.059 | 64.2 | 0.687 | -30.4 |
| 800 | 0.445 | -58.5 | 7.525 | 115.7 | 0.060 | 65.0 | 0.639 | -31.1 |
| 900 | 0.408 | -64.4 | 6.989 | 111.6 | 0.065 | 59.3 | 0.613 | -32.3 |
| 1000 | 0.379 | -66.6 | 6.548 | 107.7 | 0.080 | 63.7 | 0.591 | -34.3 |
| 1100 | 0.352 | -70.3 | 6.108 | 103.6 | 0.085 | 66.7 | 0.556 | -35.0 |
| 1200 | 0.319 | -72.9 | 5.794 | 100.4 | 0.093 | 62.9 | 0.543 | -35.4 |
| 1300 | 0.297 | -76.6 | 5.459 | 97.2 | 0.093 | 65.6 | 0.530 | -35.6 |
| 1400 | 0.274 | -78.4 | 5.182 | 93.6 | 0.105 | 66.0 | 0.511 | -36.4 |
| 1500 | 0.248 | -81.5 | 4.892 | 91.2 | 0.102 | 62.3 | 0.499 | -36.3 |
| 1600 | 0.231 | -84.3 | 4.645 | 88.1 | 0.110 | 64.6 | 0.491 | -37.1 |
| 1700 | 0.208 | -88.1 | 4.446 | 85.4 | 0.116 | 63.2 | 0.477 | -38.1 |
| 1800 | 0.188 | -91.3 | 4.217 | 82.7 | 0.117 | 63.1 | 0.463 | -38.0 |
| 1900 | 0.168 | -97.0 | 4.095 | 81.2 | 0.124 | 59.8 | 0.453 | -38.4 |
| 2000 | 0.152 | -99.5 | 3.920 | 78.0 | 0.136 | 58.5 | 0.441 | -39.2 |
| 2100 | 0.140 | -103.0 | 3.797 | 76.0 | 0.138 | 60.7 | 0.425 | -39.7 |
| 2200 | 0.122 | -112.9 | 3.601 | 74.2 | 0.148 | 58.1 | 0.416 | -40.4 |
| 2300 | 0.106 | -118.8 | 3.504 | 71.4 | 0.151 | 58.8 | 0.405 | -41.0 |
| 2400 | 0.091 | -125.5 | 3.404 | 68.7 | 0.160 | 59.1 | 0.395 | -41.1 |
| 2500 | 0.087 | -142.5 | 3.283 | 67.1 | 0.166 | 56.8 | 0.382 | -43.8 |
| 2600 | 0.084 | -157.0 | 3.157 | 65.1 | 0.174 | 57.1 | 0.371 | -44.4 |
| 2700 | 0.074 | -166.8 | 3.046 | 61.9 | 0.182 | 54.6 | 0.351 | -44.1 |
| 2800 | 0.090 | 179.9 | 3.015 | 60.6 | 0.183 | 57.2 | 0.346 | -45.7 |
| 2900 | 0.099 | 166.2 | 2.902 | 59.3 | 0.187 | 56.1 | 0.327 | -44.6 |
| 3000 | 0.107 | 158.2 | 2.810 | 56.4 | 0.193 | 54.1 | 0.312 | -46.3 |

$V_{CE} = 5\text{ V}$, $I_c = 1\text{ mA}$, $Z_o = 50\ \Omega$

| FREQUENCY MHz | S ₁₁ | | S ₂₁ | | S ₁₂ | | S ₂₂ | |
|------------------|-----------------|--------|-----------------|-------|-----------------|--------|-----------------|-------|
| | MAG. | ANG. | MAG. | ANG. | MAG. | ANG. | MAG. | ANG. |
| 100 | 0.840 | -7.0 | 3.680 | 174.5 | 0.020 | -166.8 | 0.975 | -4.4 |
| 200 | 0.859 | -11.8 | 3.333 | 167.8 | 0.026 | 30.5 | 0.970 | -7.7 |
| 300 | 0.808 | -16.2 | 3.310 | 163.1 | 0.048 | 75.0 | 0.946 | -10.1 |
| 400 | 0.798 | -22.2 | 3.155 | 157.2 | 0.049 | 73.5 | 0.920 | -13.2 |
| 500 | 0.800 | -28.0 | 3.143 | 152.8 | 0.058 | 73.2 | 0.901 | -14.5 |
| 600 | 0.771 | -33.0 | 3.052 | 148.0 | 0.056 | 69.9 | 0.895 | -17.5 |
| 700 | 0.767 | -38.8 | 3.008 | 143.7 | 0.069 | 61.7 | 0.880 | -20.4 |
| 800 | 0.736 | -42.9 | 2.923 | 138.9 | 0.074 | 63.2 | 0.852 | -21.6 |
| 900 | 0.721 | -47.1 | 2.889 | 135.5 | 0.080 | 55.4 | 0.831 | -23.7 |
| 1000 | 0.697 | -51.8 | 2.788 | 131.2 | 0.093 | 57.3 | 0.831 | -26.0 |
| 1100 | 0.680 | -57.8 | 2.740 | 126.3 | 0.095 | 58.0 | 0.798 | -26.9 |
| 1200 | 0.648 | -60.1 | 2.700 | 123.8 | 0.102 | 54.0 | 0.780 | -29.2 |
| 1300 | 0.630 | -65.4 | 2.629 | 120.0 | 0.103 | 53.7 | 0.764 | -29.2 |
| 1400 | 0.602 | -70.2 | 2.581 | 115.7 | 0.112 | 53.6 | 0.754 | -31.5 |
| 1500 | 0.584 | -74.7 | 2.498 | 113.0 | 0.111 | 51.2 | 0.737 | -31.9 |
| 1600 | 0.565 | -79.1 | 2.467 | 108.5 | 0.118 | 51.7 | 0.729 | -34.1 |
| 1700 | 0.535 | -84.5 | 2.422 | 105.3 | 0.120 | 48.1 | 0.705 | -35.8 |
| 1800 | 0.510 | -88.9 | 2.350 | 102.1 | 0.124 | 47.2 | 0.695 | -36.4 |
| 1900 | 0.483 | -94.5 | 2.342 | 98.9 | 0.126 | 47.7 | 0.670 | -38.0 |
| 2000 | 0.471 | -99.3 | 2.323 | 95.5 | 0.136 | 45.1 | 0.665 | -38.7 |
| 2100 | 0.444 | -104.5 | 2.259 | 91.8 | 0.133 | 46.7 | 0.650 | -40.8 |
| 2200 | 0.425 | -111.2 | 2.198 | 89.3 | 0.139 | 45.4 | 0.636 | -40.6 |
| 2300 | 0.402 | -116.8 | 2.165 | 85.3 | 0.141 | 47.4 | 0.618 | -41.4 |
| 2400 | 0.379 | -122.6 | 2.139 | 82.0 | 0.144 | 46.8 | 0.605 | -42.9 |
| 2500 | 0.365 | -130.3 | 2.092 | 79.4 | 0.149 | 44.1 | 0.590 | -44.5 |
| 2600 | 0.351 | -138.5 | 2.039 | 76.1 | 0.151 | 45.1 | 0.581 | -45.0 |
| 2700 | 0.327 | -143.3 | 1.981 | 72.8 | 0.153 | 42.3 | 0.559 | -45.8 |
| 2800 | 0.322 | -151.8 | 1.984 | 70.5 | 0.155 | 46.6 | 0.550 | -47.1 |
| 2900 | 0.321 | -159.6 | 1.917 | 67.8 | 0.161 | 45.9 | 0.535 | -46.8 |
| 3000 | 0.323 | -167.5 | 1.895 | 64.0 | 0.158 | 45.4 | 0.513 | -49.0 |

$V_{CE} = 5\text{ V}$, $I_c = 3\text{ mA}$, $Z_o = 50\ \Omega$


| FREQUENCY MHz | S ₁₁ | | S ₂₁ | | S ₁₂ | | S ₂₂ | |
|------------------|-----------------|--------|-----------------|-------|-----------------|-------|-----------------|-------|
| | MAG. | ANG. | MAG. | ANG. | MAG. | ANG. | MAG. | ANG. |
| 100 | 0.869 | -12.7 | 13.849 | 166.7 | 0.025 | -49.9 | 0.873 | -10.9 |
| 200 | 0.865 | -19.3 | 11.812 | 157.2 | 0.040 | 30.8 | 0.842 | -13.4 |
| 300 | 0.785 | -28.6 | 11.249 | 148.6 | 0.031 | 66.5 | 0.781 | -17.7 |
| 400 | 0.744 | -34.8 | 10.234 | 140.1 | 0.051 | 61.9 | 0.726 | -20.9 |
| 500 | 0.684 | -43.5 | 9.666 | 133.3 | 0.053 | 63.6 | 0.699 | -22.5 |
| 600 | 0.627 | -49.2 | 8.956 | 126.6 | 0.053 | 58.4 | 0.665 | -25.7 |
| 700 | 0.582 | -55.1 | 8.293 | 120.7 | 0.061 | 58.3 | 0.638 | -27.1 |
| 800 | 0.532 | -58.9 | 7.698 | 115.7 | 0.061 | 48.9 | 0.607 | -28.2 |
| 900 | 0.491 | -63.4 | 7.156 | 111.8 | 0.067 | 52.5 | 0.578 | -28.6 |
| 1000 | 0.452 | -66.7 | 6.659 | 107.6 | 0.074 | 60.6 | 0.554 | -30.1 |
| 1100 | 0.410 | -71.6 | 6.219 | 103.2 | 0.079 | 58.9 | 0.534 | -30.4 |
| 1200 | 0.378 | -73.4 | 5.879 | 100.2 | 0.086 | 54.8 | 0.518 | -30.6 |
| 1300 | 0.345 | -76.0 | 5.545 | 97.0 | 0.088 | 57.6 | 0.509 | -31.5 |
| 1400 | 0.326 | -77.3 | 5.236 | 93.6 | 0.095 | 61.4 | 0.491 | -31.2 |
| 1500 | 0.297 | -81.3 | 4.917 | 91.2 | 0.093 | 58.5 | 0.480 | -30.7 |
| 1600 | 0.278 | -82.3 | 4.722 | 88.1 | 0.103 | 61.5 | 0.480 | -32.7 |
| 1700 | 0.249 | -86.1 | 4.476 | 85.8 | 0.107 | 60.6 | 0.467 | -32.2 |
| 1800 | 0.229 | -88.0 | 4.226 | 83.3 | 0.110 | 58.3 | 0.462 | -32.4 |
| 1900 | 0.205 | -92.7 | 4.128 | 81.6 | 0.118 | 58.5 | 0.451 | -33.1 |
| 2000 | 0.187 | -95.0 | 4.031 | 78.2 | 0.125 | 57.4 | 0.441 | -33.7 |
| 2100 | 0.175 | -97.9 | 3.816 | 76.3 | 0.137 | 59.3 | 0.433 | -33.9 |
| 2200 | 0.157 | -103.5 | 3.652 | 74.8 | 0.141 | 57.6 | 0.430 | -34.6 |
| 2300 | 0.136 | -108.6 | 3.538 | 71.9 | 0.141 | 58.3 | 0.417 | -35.0 |
| 2400 | 0.121 | -112.0 | 3.416 | 69.4 | 0.154 | 57.8 | 0.410 | -36.5 |
| 2500 | 0.114 | -119.8 | 3.310 | 68.4 | 0.163 | 55.6 | 0.402 | -37.5 |
| 2600 | 0.117 | -127.8 | 3.195 | 66.6 | 0.163 | 55.4 | 0.390 | -39.9 |
| 2700 | 0.116 | -143.7 | 3.143 | 63.8 | 0.166 | 52.7 | 0.365 | -40.3 |
| 2800 | 0.115 | -161.0 | 3.119 | 62.0 | 0.171 | 54.4 | 0.357 | -40.5 |
| 2900 | 0.110 | -175.8 | 3.009 | 60.0 | 0.177 | 53.5 | 0.341 | -39.6 |
| 3000 | 0.116 | 174.7 | 2.907 | 57.6 | 0.184 | 52.6 | 0.324 | -41.5 |

$V_{CE} = 5\text{ V}$, $I_c = 5\text{ mA}$, $Z_o = 50\ \Omega$

| FREQUENCY MHz | S ₁₁ | | S ₂₁ | | S ₁₂ | | S ₂₂ | |
|------------------|-----------------|--------|-----------------|-------|-----------------|-------|-----------------|-------|
| | MAG. | ANG. | MAG. | ANG. | MAG. | ANG. | MAG. | ANG. |
| 100 | 0.930 | -9.5 | 9.751 | 169.6 | 0.010 | -62.7 | 0.926 | -7.1 |
| 200 | 0.923 | -16.8 | 8.571 | 160.7 | 0.032 | 44.7 | 0.906 | -11.5 |
| 300 | 0.865 | -23.9 | 8.239 | 153.5 | 0.037 | 74.8 | 0.870 | -15.2 |
| 400 | 0.835 | -31.3 | 7.706 | 145.8 | 0.047 | 70.1 | 0.819 | -18.7 |
| 500 | 0.798 | -37.4 | 7.390 | 139.8 | 0.046 | 56.3 | 0.769 | -21.1 |
| 600 | 0.751 | -43.8 | 6.954 | 134.2 | 0.056 | 64.6 | 0.754 | -22.9 |
| 700 | 0.706 | -50.1 | 6.506 | 127.6 | 0.065 | 60.6 | 0.742 | -26.1 |
| 800 | 0.660 | -54.5 | 6.228 | 122.8 | 0.067 | 59.0 | 0.695 | -26.7 |
| 900 | 0.624 | -59.8 | 5.913 | 118.6 | 0.073 | 51.6 | 0.673 | -29.5 |
| 1000 | 0.576 | -63.4 | 5.522 | 114.1 | 0.083 | 59.0 | 0.646 | -31.3 |
| 1100 | 0.545 | -68.1 | 5.199 | 109.6 | 0.085 | 60.0 | 0.620 | -30.9 |
| 1200 | 0.504 | -71.8 | 5.006 | 106.6 | 0.092 | 54.2 | 0.602 | -32.0 |
| 1300 | 0.471 | -74.9 | 4.762 | 103.0 | 0.088 | 54.8 | 0.587 | -33.1 |
| 1400 | 0.439 | -78.5 | 4.528 | 99.2 | 0.102 | 56.6 | 0.573 | -33.7 |
| 1500 | 0.408 | -82.7 | 4.286 | 96.7 | 0.099 | 54.3 | 0.558 | -33.5 |
| 1600 | 0.385 | -85.6 | 4.086 | 92.6 | 0.110 | 57.8 | 0.550 | -35.0 |
| 1700 | 0.349 | -89.6 | 3.942 | 90.4 | 0.109 | 53.1 | 0.530 | -35.3 |
| 1800 | 0.326 | -93.3 | 3.755 | 87.6 | 0.112 | 54.4 | 0.522 | -35.6 |
| 1900 | 0.299 | -96.9 | 3.644 | 84.9 | 0.124 | 55.2 | 0.507 | -36.5 |
| 2000 | 0.280 | -101.1 | 3.561 | 82.3 | 0.129 | 54.2 | 0.502 | -37.0 |
| 2100 | 0.257 | -105.0 | 3.391 | 78.9 | 0.131 | 55.6 | 0.488 | -37.0 |
| 2200 | 0.234 | -110.7 | 3.272 | 77.2 | 0.139 | 53.1 | 0.471 | -37.3 |
| 2300 | 0.217 | -115.8 | 3.183 | 74.3 | 0.142 | 53.8 | 0.468 | -38.6 |
| 2400 | 0.196 | -119.2 | 3.086 | 71.8 | 0.151 | 54.3 | 0.461 | -40.1 |
| 2500 | 0.183 | -127.2 | 3.002 | 70.2 | 0.159 | 51.5 | 0.448 | -40.8 |
| 2600 | 0.176 | -132.1 | 2.874 | 67.9 | 0.163 | 52.2 | 0.438 | -42.2 |
| 2700 | 0.176 | -137.8 | 2.809 | 65.7 | 0.160 | 51.5 | 0.410 | -43.0 |
| 2800 | 0.187 | -152.3 | 2.827 | 63.7 | 0.165 | 53.0 | 0.405 | -43.6 |
| 2900 | 0.177 | -164.7 | 2.746 | 61.3 | 0.166 | 53.7 | 0.383 | -42.4 |
| 3000 | 0.177 | -173.7 | 2.663 | 58.6 | 0.176 | 52.4 | 0.367 | -43.8 |

PACKAGE DIMENSIONS

3 PIN ULTRA SUPER MINIMOLD (UNIT: mm)

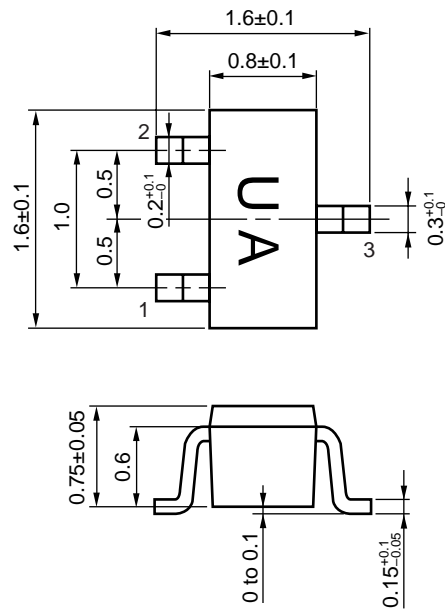

PIN CONNECTIONS

- 1. Emitter
- 2. Base
- 3. Collector

[MEMO]

[MEMO]

[MEMO]

- **The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.**
 - No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.
 - NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.
 - Descriptions of circuits, software, and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software, and information in the design of the customer's equipment shall be done under the full responsibility of the customer. NEC Corporation assumes no responsibility for any losses incurred by the customer or third parties arising from the use of these circuits, software, and information.
 - While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.
 - NEC devices are classified into the following three quality grades:
"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.
 - Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
 - Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)
 - Specific: Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.
- The quality grade of NEC devices is "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact an NEC sales representative in advance.