

**FEATURES**

■ **HIGH POWER**

P1dB=36.5dBm at 14.0GHz to 14.5GHz

■ **BROAD BAND INTERNALLY MATCHED**

■ **HERMETICALLY SEALED PACKAGE**

■ **HIGH GAIN**

G1dB=6.5dB at 14.0GHz to 14.5GHz

**RF PERFORMANCE SPECIFICATIONS ( Ta= 25° C )**

| CHARACTERISTICS                                  | SYMBOL | CONDITION                     | UNIT | MIN. | TYP. | MAX. |
|--|--------|-------------------------------|------|------|------|------|
| Output Power at 1dB Compression Point            | P1dB   | VDS= 9V<br>f= 14.0 to 14.5GHz | dBm  | 36.0 | 36.5 | —    |
| Power Gain at 1dB Compression Point              | G1dB   |                               | dB   | 6.0  | 6.5  | —    |
| Drain Current                                    | IDS1   |                               | A    | —    | 1.7  | 2.2  |
| Gain Flatness                                    | ΔG     |                               | dB   | —    | —    | ±0.8 |
| Power Added Efficiency                           | ηadd   |                               | %    | —    | 23   | —    |
| 3 <sup>rd</sup> Order Intermodulation Distortion | IM3    | NOTE                          | dBc  | -42  | -45  | —    |
| Drain Current                                    | IDS2   |                               | A    | —    | 1.7  | 2.2  |
| Channel Temperature Rise                         | ΔTch   | VDS X IDS X Rth(c-c)          | °C   | —    | —    | 70   |

NOTE : Two Tone Test, Po=25dBm (Single Carrier Level)

**ELECTRICAL CHARACTERISTICS ( Ta= 25° C )**

| CHARACTERISTICS               | SYMBOL   | CONDITION            | UNIT | MIN. | TYP. | MAX. |
|-------------------------------|----------|----------------------|------|------|------|------|
| Transconductance              | gm       | VDS= 3V<br>IDS= 2.0A | mS   | —    | 1200 | —    |
| Pinch-off Voltage             | VGSoff   | VDS= 3V<br>IDS= 60mA | V    | -2.0 | -3.5 | -5.0 |
| Saturated Drain Current       | IDSS     | VDS= 3V<br>VGS= 0V   | A    | —    | 4.0  | 5.2  |
| Gate-Source Breakdown Voltage | VGSO     | IGS= -60μA           | V    | -5   | —    | —    |
| Thermal Resistance            | Rth(c-c) | Channel to Case      | °C/W | —    | 2.9  | 3.5  |


◆ The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may results from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others.

The information contained herein is subject to change without prior notice. It is therefor advisable to contact TOSHIBA before proceeding with design of equipment incorporating this product.

**ABSOLUTE MAXIMUM RATINGS ( Ta= 25° C )**

| CHARACTERISTICS                     | SYMBOL | UNIT | RATING      |
|-------------------------------------|--------|------|-------------|
| Drain-Source Voltage                | VDS    | V    | 15          |
| Gate-Source Voltage                 | VGS    | V    | -5          |
| Drain Current                       | IDS    | A    | 5.2         |
| Total Power Dissipation (Tc= 25 °C) | PT     | W    | 30          |
| Channel Temperature                 | Tch    | °C   | 175         |
| Storage Temperature                 | Tstg   | °C   | -65 to +175 |

**PACKAGE OUTLINE (2-9D1B)**

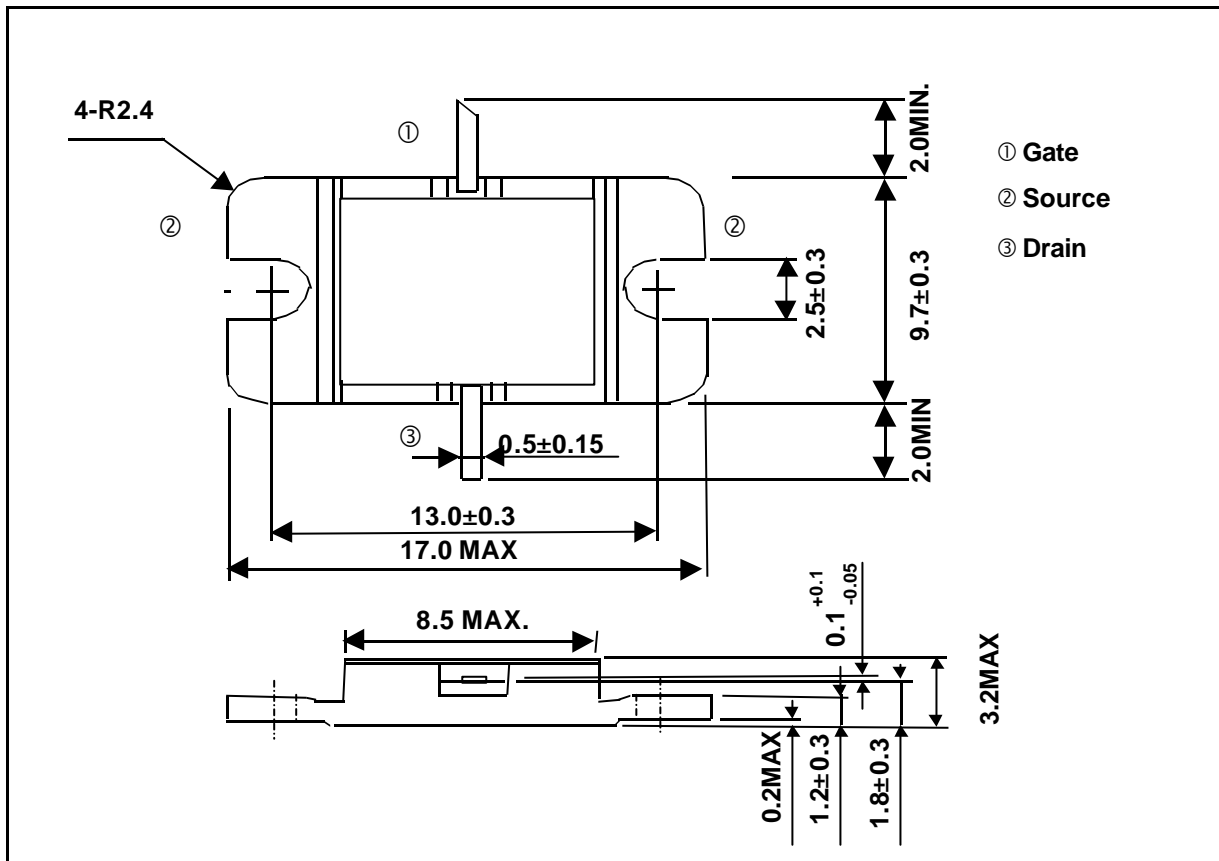

**HANDLING PRECAUTIONS FOR PACKAGED TYPE**

Soldering iron should be grounded and the operating time should not exceed 10 seconds at 260°C.