

■ Description

The FA7607P consists of a reference voltage circuit and a comparator. This bipolar IC is used to monitor the open-collector output voltage of a power supply.


■ Features

- Two built-in output circuit for RESET and $\overline{\text{RESET}}$ signals
- Not many external discrete components are needed. (only two resistors for a standard application circuit)
- Wide operating voltage range ($V_{CC} = 4.5$ to $40V$)
- Stable reference voltage circuit ($2.95V$ typical)
- Stable voltage detection by built-in hysteresis circuit (hysteresis externally adjustable)

■ Applications


- Memory protection of microprocessor-applied system
- Reset signal generation circuit for supply voltage drop and return

■ Pin assignment



■ Dimensions, mm

• DIP-8

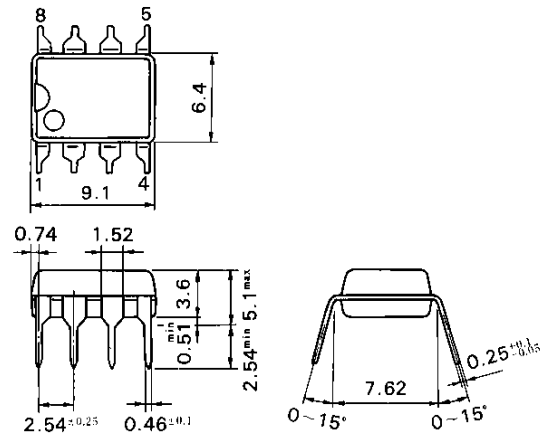

Pin No.	Pin symbol	Description
1	RI	RESET comparator input
2	VCC	Power supply
3	NC	—
4	NC	—
5	GND	Ground
6	RO	RESET Output
7	$\overline{RO}$	RESET Output
8	RHO	RESET hysteresis output

■ Absolute maximum ratings (Ta = 25°C)

Item	Symbol	Rating	Unit
Supply voltage *	V _{CC}	-0.6 to +41	V
Input current	I _{IN}	2	mA
Input voltage	V _{IN}	-0.3 to +6.5	V
Output current	I _O	30	mA
Output voltage	V _O	35	V
Hysteresis circuit output current	I _{O HY}	1	mA
Power dissipation	P _d	350	mW
Operating temperature	T _{opr}	-20 to +85	°C
Storage temperature	T _{stg}	-30 to +150	°C


* Recommended operating voltage range: V_{CC} = 4.5 to 40V
Lower limit of voltage detection: 5V

■ Electrical characteristics (Ta = 25°C, V_{CC} = 5V)


Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
Input current	I _{IN}				5	μA
H-level input threshold voltage	V _{THH}		2.80	2.95	3.10	V
L-level input threshold voltage	V _{THL}		2.67	2.82	2.96	V
Internal circuit hysteresis voltage	dV		0.10	0.13	0.17	V
L-level output voltage	V _{OL1}	I _O = 5mA			0.20	V
	V _{OL2}	I _O = 10mA			0.25	V
L-level hysteresis output voltage	V _{OL HY}	I _O = 1mA			0.40	V
Ro output current	I _{O R1}	V _{OL} = 1V	4.0			mA
	I _{O R2}	V _{OL} = 1V	10.0			mA
	I _{O R3}	V _{OL} = 1V	20.0			mA
Ro output current	I _{OR}	V _{OL} = 1V	10.0			mA
Supply current	I _{CC}	V _{IN} = 0V	2.0		8.0	mA
Temperature coefficient of reference voltage		-20 to +85°C		0.02	0.05	%/°C

■ Characteristic curves ($T_a = 25^\circ\text{C}$)


L-level output voltage (V_{OL}) vs. output current (I_O)

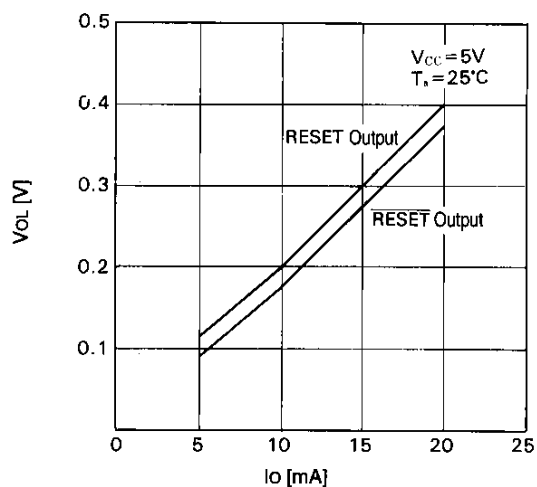


Supply current (I_{CC}) vs. supply voltage (V_{CC})

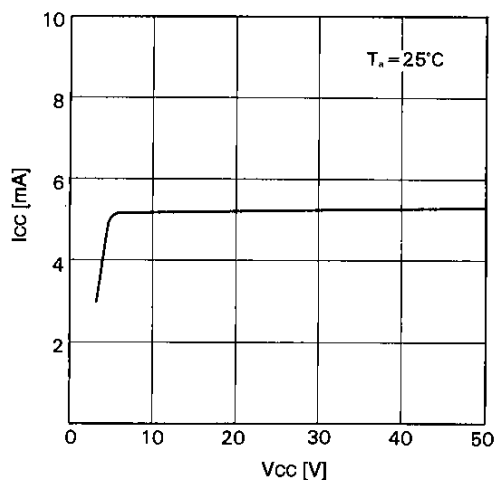


Input threshold voltage (V_{TH}) vs. supply voltage (V_{CC})

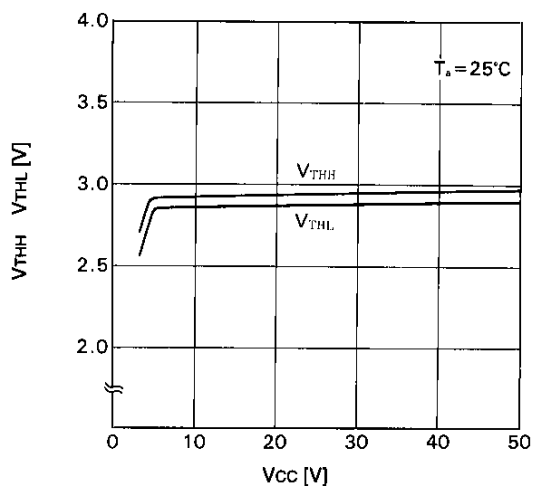

Input threshold voltage (V_{TH}) vs. ambient temperature (T_a)

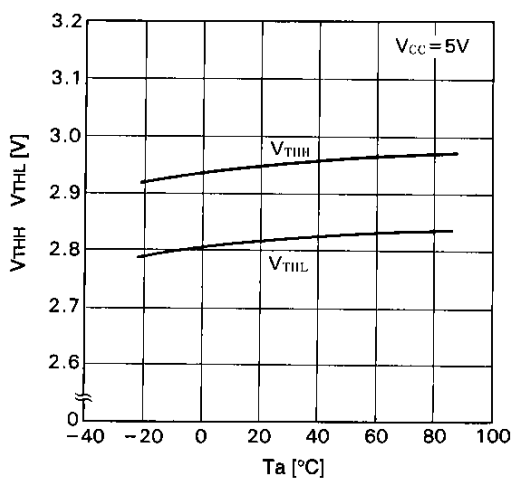

Output current (I_O) vs. supply voltage (V_{CC})

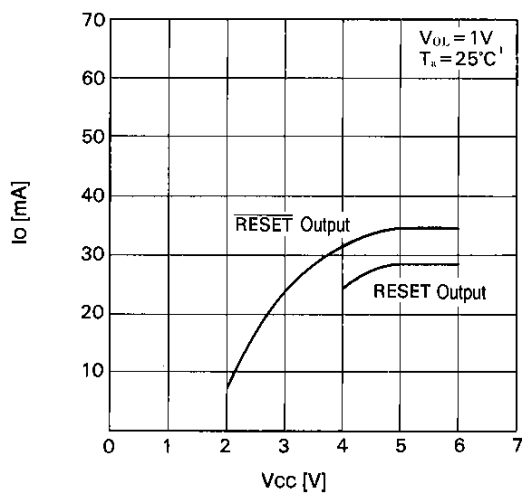

■ Explanation of circuits

Figure 1 shows the block diagram of the FA7607P bipolar IC. This IC mainly consists of a reference voltage circuit and a comparator. The comparator is designed not to malfunction even when the supply voltage is below the normal voltage range (about 2 to 4.5V). See Fig. 3 for the standard application circuit. The supply voltage V_{IN} is divided by a voltage divider consisting of two external resistors (R_a and R_b) and is applied to the input terminal (RI). The supply voltage is also connected to the power supply terminal VCC directly. Figure 2 shows variation of the supply voltage V_{IN} and changes of the RESET and RESET output statuses. The reset signal stop level V_{RIH} the supply voltage reaches after an increase can be calculated by the formula of (1). The RESET signal output transistor remains OFF and the RESET signal output transistor remains ON until the supply voltage exceeds the level.

The reset signal start level V_{RIL} the supply voltage reaches after a decrease can be calculated by the formula of (2). Once the supply voltage goes lower than this level, the RESET signal output transistor goes OFF and the RESET signal output transistor goes ON.

At power-on, the reset signals should be output until the supply voltage of the system reaches the normal level. If the supply voltage becomes low, the reset signal should be issued within the normal supply voltage range of the system. Therefore, the high and low voltage levels (V_{RIH} and V_{RIL}) should be set higher than the supply voltage level (V_s) where normal system operations are guaranteed.

This IC has a hysteresis characteristic of about 5%. By adding an external resistor R_h , the hysteresis voltage width can be increased and adjusted. The high and low voltage levels (V_{RIH} and V_{RIL}) can be calculated by the formulas of (3) and (4).

$$V_{RIH} = V_{THH} \cdot (R_a + R_b) / R_b \quad \dots\dots\dots (1)$$

$$V_{RIL} = V_{THL} \cdot (R_a + R_b) / R_b \quad \dots\dots\dots (2)$$

$$V_{RIH} = V_{THH} \cdot (R_a \cdot R_b + R_a \cdot R_h + R_b \cdot R_h) / (R_b \cdot R_h) \quad \dots\dots\dots (3)$$

$$V_{RIL} = V_{THL} \cdot (R_a + R_b) / R_b \quad \dots\dots\dots (4)$$

Where, $V_{THH}=2.95V$ (typical) and $V_{THL}=2.82V$ (typical)

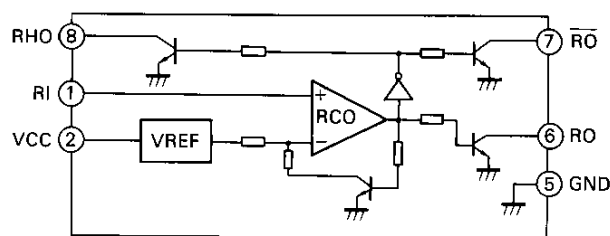


Fig. 1 Block diagram

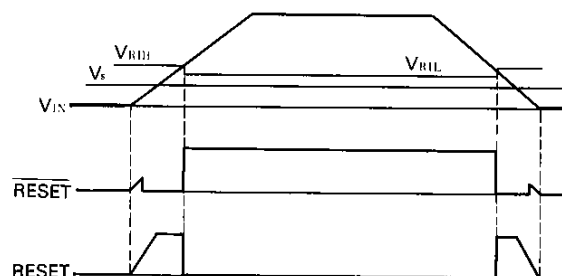


Fig. 2 Timing chart




Fig. 3 Standard application circuit

■ Application circuits

1. Basic connections

The standard application circuit requires only two resistors outside the IC. This is shown in Fig. 3. However, since the output stage is an open collector, the system may require a pull-up resistor.

2. Delay circuit

As explained before, the RESET and RESET signal timings depend on the rise and fall characteristics of the supply voltage. If appropriate timings (especially, output delays) cannot be obtained only by the characteristics, they may need to be set on the FA7607P. Fig. 4 shows an example of application. The delays (t_{d1} and t_{d2}) can be calculated by the formulas of (5) and (6).

$$t_{d1} = -C \cdot \left(\frac{R_a \cdot R_b}{R_a + R_b} \right) \cdot \ln \left(1 - \frac{T_{THH}}{V_{IN}} \cdot \frac{R_a + R_b}{R_b} \right) \dots\dots\dots (5)$$

$$t_{d2} = -C \cdot \left(\frac{R_a \cdot R_b}{R_a + R_b} \right) \cdot \ln \left(\frac{T_{THL}}{V_{IN}} \cdot \frac{R_a + R_b}{R_b} \right) \dots\dots\dots (6)$$

Where, $V_{THH} = 2.95V$ (typical) and $V_{THL} = 2.82$ (typical)

3. Astable multivibrator circuit

Figure 5 shows how to create an astable multivibrator circuit with the FA7607P. The output transistor ON time, t_{on} , and OFF time, t_{off} , can be calculated by the formulas of (7) to (9).

$$t_{on} = -C \cdot R \cdot \ln (V_{THL}/V_{THH}) \dots\dots\dots (7)$$

$$t_{off} = -C \cdot (R + R_L) \cdot \ln \left(1 - \frac{T_{THH} - V_{THL}}{V_{CC} - V_{THL}} \right) \dots\dots\dots (8)$$

$$t = t_{on} + t_{off} \dots\dots\dots (9)$$

Where, $V_{THH} = 2.95V$ (typical) and $V_{THL} = 2.82V$ (typical)

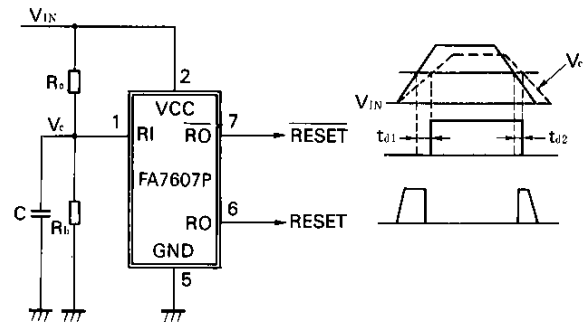


Fig. 4 Delay circuit

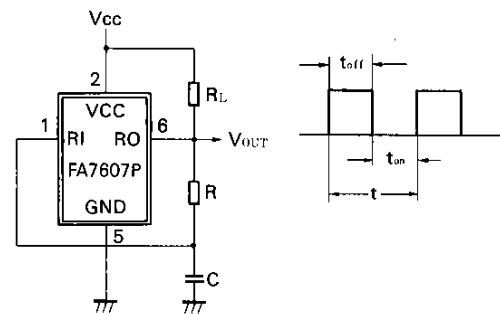


Fig. 5 Astable multivibrator circuit

CAUTION

1. This Data Book contains the product specifications, characteristics, data, materials, and structures as of July 1995. The contents are subject to change without notice for specification changes or other reasons. When using a product listed in this Data Book, be sure to obtain the latest specifications.
2. All applications described in this Data Book exemplify the use of Fuji's products for your reference only. No right or license, either express or implied, under any patent, copyright, trade secret or other intellectual property right owned by Fuji Electric Co., Ltd. is (or shall be deemed) granted. Fuji makes no representation or warranty, whether express or implied, relating to the infringement or alleged infringement of other's intellectual property rights which may arise from the use of the applications described herein.
3. Although Fuji Electric is enhancing product quality and reliability, a small percentage of semiconductor products may become faulty. When using Fuji Electric semiconductor products in your equipment, you are requested to take adequate safety measures to prevent the equipment from causing a physical injury, fire, or other problem if any of the products become faulty. It is recommended to make your design fail-safe, flame retardant, and free of malfunction.
4. The products introduced in this Data Book are intended for use in the following electronic and electrical equipment which has normal reliability requirements.
 - Computers • OA equipment • Communications equipment (terminal devices) • Measurement equipment
 - Machine tools • Audiovisual equipment • Electrical home appliances • Personal equipment • Industrial robots etc.
5. If you need to use a product in this Data Book for equipment requiring higher reliability than normal, such as for the equipment listed below, it is imperative to contact Fuji Electric to obtain prior approval. When using these products for such equipment, take adequate measures such as a backup system to prevent the equipment from malfunctioning even if a Fuji's product incorporated in the equipment becomes faulty.
 - Transportation equipment (mounted on cars and ships) • Trunk communications equipment
 - Traffic-signal control equipment • Gas leakage detectors with an auto-shut-off feature
 - Emergency equipment for responding to disasters and anti-burglary devices • Safety devices
6. Do not use products in this Data Book for the equipment requiring strict reliability such as (without limitation)
 - Space equipment • Aeronautic equipment • Atomic control equipment
 - Submarine repeater equipment • Medical equipment
7. Copyright ©1995 by Fuji Electric Co., Ltd. All rights reserved.

No part of this Data Book may be reproduced in any form or by any means without the express permission of Fuji Electric.
8. If you have any question about any portion in this Data Book, ask Fuji Electric or its sales agents before using the product. Neither Fuji nor its agents shall be liable for any injury caused by any use of the products not in accordance with instructions set forth herein.