



CS289

# 20mA Air-Core Tachometer Drive Circuit

## Description

The CS289 is specifically designed for use with air-core meter movements. The IC has charge pump circuitry for frequency-to-voltage conversion, a shunt regulator for stable

operation, a function generator, and sine and cosine amplifiers. The buffered sine and cosine outputs will typically sink or source 20mA.

## Features


- Single Supply Operation
- On-Chip Regulation
- 20mA Output Drive Capability

## Absolute Maximum Ratings

Supply Voltage ( $V_{CC}$ ) .....	20V
Operating Temperature .....	-40°C to +100°C
Junction Temperature.....	-40°C to 150°C
Storage Temperature.....	-65°C to +150°C
Lead Temperature Soldering	


Wave Solder (through hole styles only).....10 sec. max, 260°C peak  
Reflow (SMD styles only).....60 sec. max above 183°C, 230°C peak

## Block Diagram

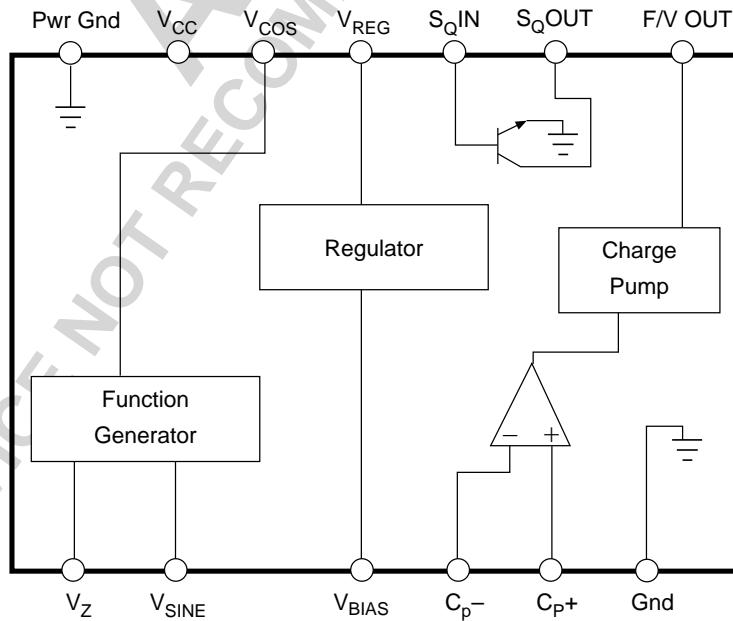


## Package Options

### 14L PDIP



### 20L SOIC Wide

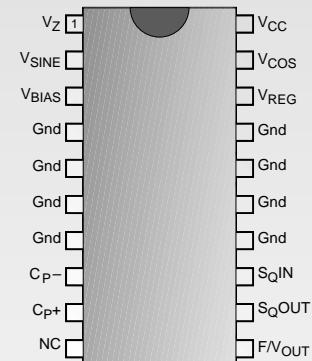

ON Semiconductor

December, 2001 - Rev. 4

Electrical Characteristics: ( $V_{CC} = 13.1V$ ,  $-30^\circ C \leq T_A \leq 85^\circ C$ )

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Current (Note 2)	$V_{CC} = 15.0V$ $V_{CC} = 13.1V$ $V_{CC} = 11.3V$		54 60 60	65 65	mA mA mA
Regulated Voltage	$I_{REG} = 4.3mA$	7.7	8.5	9.3	V
Regulation	$I_{REG} = 0$ to $5mA$		0.10	0.20	V
Signal Input Current	$T = 25^\circ C$	0.1	2.0	4.0	mA
Saturation Voltage	$I_{SQ\ OUT} = 5mA$ , $I_{SQ\ IN} = 500\mu A$		0.20	0.55	V
Leakage Current	$I_{SQ\ OUT} = 16V$ , $V_{SQ\ IN} = 0V$			10	$\mu A$
Input Current	$C_{P+} = 0$ , $T = 25^\circ C$		1	15	nA
F to V Output	$V_{SQ\ IN} = 0$ (zero input), $\emptyset = 0^\circ$ $V_{COS} = 0$ (Note 1), $\emptyset = 270^\circ$	1.8 6.3	2.1 7.1	2.4 7.9	V
Linearity	$E_O$ vs. Frequency $V_{COS} = 0$ (Note 1), $\emptyset = 270^\circ$ , $T = 25^\circ C$	-1.5		1.5	%
$V_{sine}$ at $\emptyset = 0^\circ$	$V_{SQ\ IN} = 0$ (zero input), $\emptyset = 0^\circ$	-0.55	0.00	0.55	V
MAX $V_{sine+}$	$V_{COS} = 0$ (Note 1), $\emptyset = 90^\circ$	3.8	4.5	5.8	V
MAX $V_{sine-}$	$V_{COS} = 0$ (Note 1), $\emptyset = 270^\circ$	-3.8	-4.5	-5.8	V
Coil Drive Current	$V_{COS} = 0$ (Note 1), $\emptyset = 90^\circ$ , $T = 25^\circ C$ $V_{COS} = 0$ (Note 1), $\emptyset = 270^\circ$		20 20	25 25	mA mA
MAX $V_{COS+}$	$V_{SQ\ IN} = 0$ (zero input), $\emptyset = 0^\circ$	3.8	4.5	5.8	V
MAX $V_{COS-}$	$V_{sine} = 0$ (Note 1), $\emptyset = 180^\circ$	-3.8	-4.5	-5.8	V
Coil Drive Current	$V_{SQ\ IN} = 0$ (zero input), $\emptyset = 0^\circ$ $V_{sine} = 0$ (Note 1), $\emptyset = 180^\circ$		20 20	25 25	mA mA
External Voltage Ref.		4.98	5.40	5.85	V

Note 1:  $V_{sine}$  measured  $V_{sine}$  to  $V_Z$ ;  $V_{COS}$  measured  $V_{COS}$  to  $V_Z$ . All other voltages specified are measured to ground.Note 2: Max PWR dissipation  $\leq V_{CC} \times I_{CC} - (V_2 I_{sine} + V12 I_{COS})$ .

## Package Pin Description

PACKAGE PIN #		PIN SYMBOL	FUNCTION
20L SO	14L PDIP		
1	1	$V_Z$	External Zener reference.
2	2	$V_{sine}$	Sine output signal.
3	4	$V_{BIAS}$	Test pin or "0" calibration pin.
4, 5, 6, 7, 14, 15, 16, 17	7	Gnd	Analog Ground connection.
8	5	$C_{P-}$	Negative input to charge pump.
9	6	$C_{P+}$	Positive input to charge pump.
10	3	NC	No Connection
11	8	F/V <sub>OUT</sub>	Output voltage proportional to input signal frequency.

## Package Pin Description: continued

CS289


PACKAGE PIN #	PIN SYMBOL	FUNCTION
<b>20L SO</b>	<b>14L PDIP</b>	
12	9	S <sub>Q</sub> OUT
13	10	S <sub>Q</sub> IN
18	11	V <sub>REG</sub>
19	12	V <sub>COS</sub>
20	13	V <sub>CC</sub>
	14	Pwr Gnd
		Power Ground connection.

Note 1: V<sub>sine</sub> measured V<sub>sine</sub> to V<sub>Z</sub>. V<sub>COS</sub> measured V<sub>COS</sub> to V<sub>Z</sub>. All other voltages specified are measured to ground.


Note 2: Max PWR dissipation  $\leq V_{CC} \times I_{CC} - (V_2 I_{sine} + V12 I_{cos})$ .

## Typical Performance Characteristics


Output Angle in Polar Form

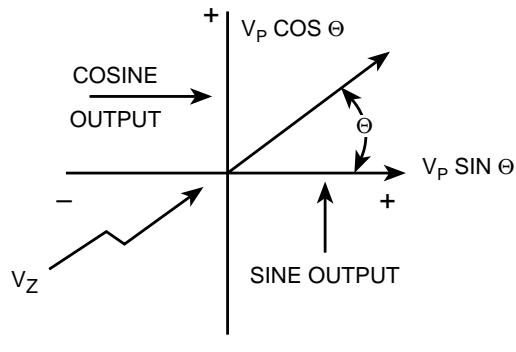

Charge Pump Output Voltage

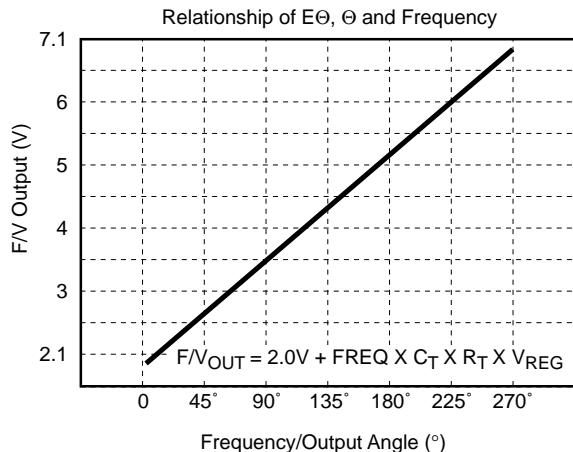

Function Generator Output Voltage

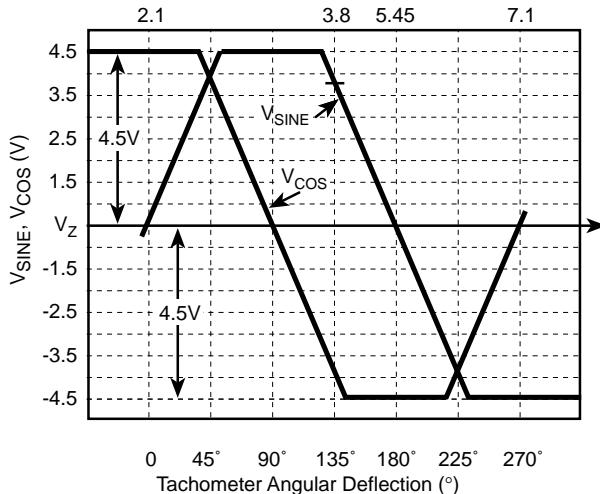

**Charge Pump**

The input frequency is buffered through a transistor, then applied to the charge pump for frequency-to-voltage conversion (Figure 1). The charge pump output voltage,  $E\emptyset$ , will range from 2.1V with no input ( $\emptyset = 0^\circ$ ) to 7.1V at  $\emptyset = 270^\circ$ . The charge that appears on  $C_T$  is reflected to  $C_{OUT}$  through a Norton amplifier. The frequency applied at  $S_{QIN}$  charges and discharges  $C_T$  through  $R_1$  and  $R_2$ .  $C_{OUT}$  reflects the charge as a voltage across resistor  $R_T$ .

**Function Generator/Sine and Cosine Amplifiers**

The output waveforms of the sine and cosine amplifiers are derived by On-Chip Amplifier/Comparator circuitry. The various trip points for the circuit (i.e.  $90^\circ$ ,  $180^\circ$ ,  $270^\circ$ ) are determined by an internal resistor divider connected to the voltage regulator. The voltage  $E\emptyset$  is compared to the divider network by the function generator circuitry. Use of an external zener reference at  $V_Z$  allows both sine and cosine amplifiers to swing positive and negative with respect to this reference. The output magnitudes and directions have the relationship as shown in Typical Characteristics diagrams.

Note: Pin connections referenced are for the 14L DIP.

**Function Generator Output ( $\emptyset$ ):**  $V_{CC}=13.1V$ ,  $T_A=25^\circ C$

$$\emptyset = \text{ArcTan} \left( \frac{V_{\text{sine}}}{V_{\text{cos}}} \right) \text{ (Measured angle after calibration at } 180^\circ C \text{)}$$

For  $\emptyset_A=45^\circ, 90^\circ, 135^\circ, 180^\circ, 225^\circ, 270^\circ$ , (Desired angle)

$$(\emptyset_A - \emptyset_M) \leq 4.0^\circ$$

**Temperature Sensitivity:**  $V_{CC}=13.1V$

$$\Delta \emptyset_{MT} = \emptyset_M \text{ (} T=25^\circ C \text{)} - \emptyset_M \text{ (} -20^\circ C \leq T \leq +85^\circ C \text{)}$$

$$(\Delta \emptyset_{MT}) \leq 3.5^\circ C, -20^\circ C \leq T \leq +85^\circ C$$

**Voltage Sensitivity:**  $T_A=25^\circ C$

$$\Delta \emptyset_{MV} = \emptyset_M \text{ (} V_{CC}=13.1V \text{)} - \emptyset_M \text{ (} 11.3V \leq V_{CC} \leq 15V \text{)}$$

$$(\Delta \emptyset_{MV}) \leq 2^\circ, 11.3V \leq V_{CC} \leq 15V$$

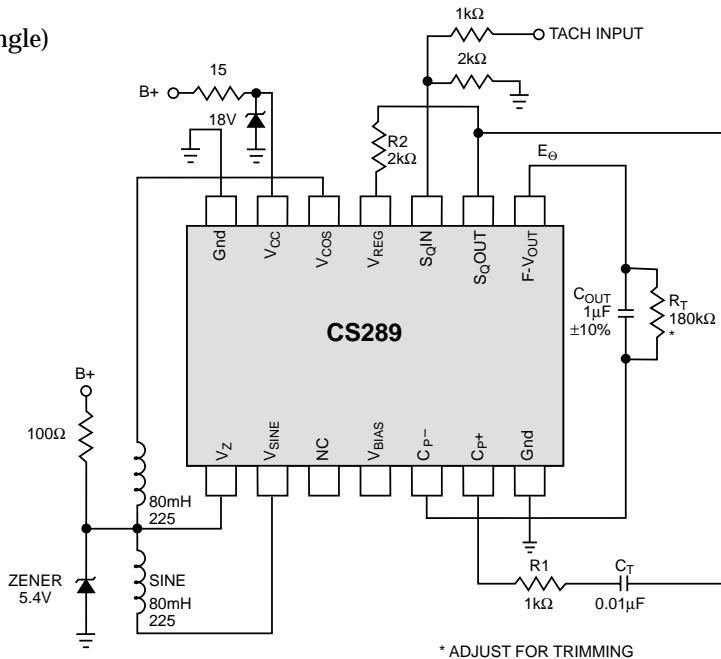


Figure 1. Functional Diagram of CS289 Circuit.

## Tachometer Application

$$\frac{\text{RPM} \times \# \text{ OF CYL.}}{60} = \text{Frequency}$$

$$V_{F/V_{OUT}} = 2.1 + \text{Frequency} \times C_T \times R_T (V_{REG} - 0.7)$$

The above equations were used in calculating the following values, where  $V_{F/V_{OUT}} = 7.1V$  at  $=270^\circ$  and  $C_T = 0.01 F$ .

4 cylinder: Freq = 200Hz,  $R_T = 320k\Omega$

6 cylinder: Freq = 300Hz,  $R_T = 220k\Omega$

8 cylinder: Freq = 400Hz,  $R_T = 150k\Omega$

Typical values shown above apply to a nominal value of  $V_{REG}$  of 8.5 volts. It must be realized that trimming of  $R_T$  will be necessary to compensate for variations in regulator voltage from one unit to another.

An alternative to this adjustment is to replace  $R_2$  with a potentiometer, as shown in Figure 2.

Partial schematic shown in Figure 3 represents one method for use with DC applications instead of frequency.

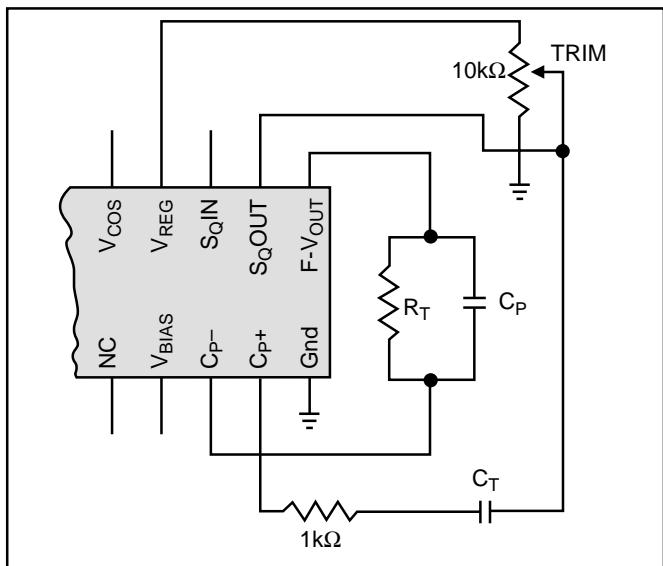


Figure 2: Alternate Trimming Method

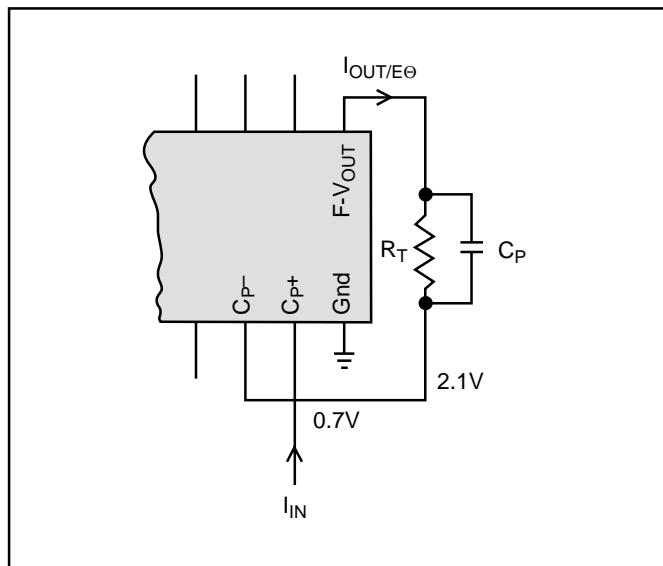


Figure 3: DC Application

## Package Specification


## PACKAGE DIMENSIONS IN mm (INCHES)

Lead Count	D			
	Metric		English	
	Max	Min	Max	Min
14L PDIP	19.69	18.67	.775	.735
20L SO Wide	13.00	12.60	.512	.496


## PACKAGE THERMAL DATA

Thermal Data	14L PDIP	20L SOIC	
R <sub>OJC</sub> typ	48	17	°C/W
R <sub>OJA</sub> typ	85	90	°C/W

Plastic DIP (N); 300 mil wide

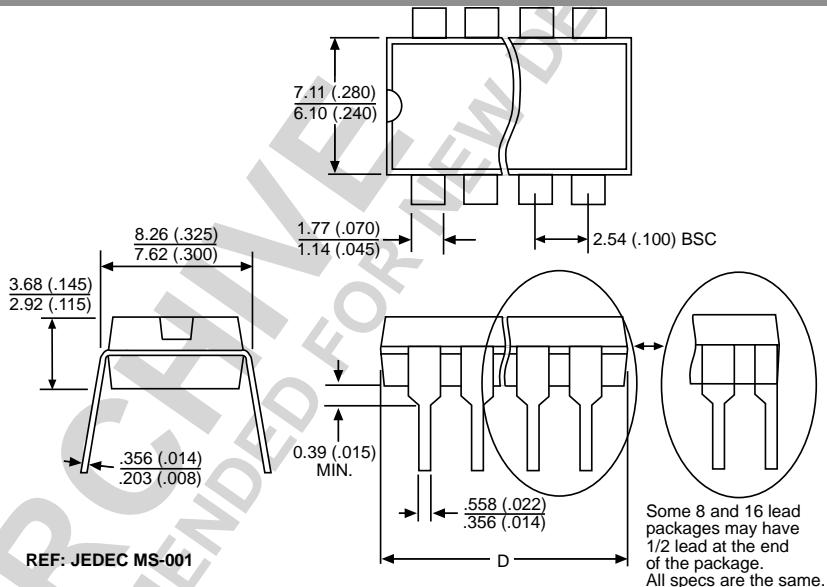

Surface Mount Wide Body (DW); 300 mil wide

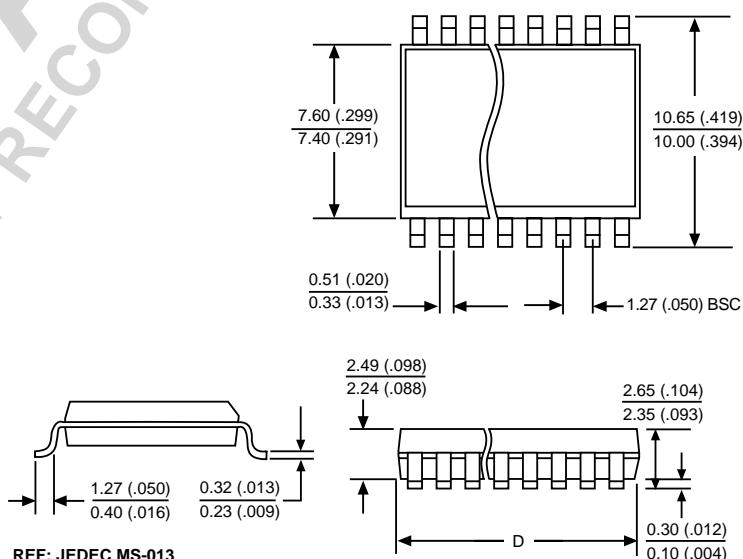

## Ordering Information

Part Number	Description
CS289GDW20	20 Lead SO Wide
CS289GDWR20	20 Lead SO Wide (tape & reel)
CS289GN14	14 Lead PDIP

ON Semiconductor and the ON Logo are trademarks of Semiconductor Components Industries, LLC (SCILLC). ON Semiconductor reserves the right to make changes without further notice to any products herein. For additional information and the latest available information, please contact your local ON Semiconductor representative.

## Notes

## Notes