

# SANYO Semiconductors **DATA SHEET**

# LA4628 — For General Audio 20W 2-Channel BTL Power Amplifier

#### Overview

The LA4628 is a 2-channel general-purpose BTL audio power amplifier provided in a miniature package. It was designed for the best possible audio quality and features an extended low band roll-off frequency provided by a newly-developed NF circuit that does not require an external capacitor. Furthermore, crosstalk, which can cause muddiness in the audio output, has been significantly reduced by both circuit and wiring pattern improvements. Thus this amplifier can provide powerful lows and clear highs.

Note that this device is pin compatible with the 13.5W×2-channel LA4625, and allows end products differentiated by their power rating to share the same printed circuit board.

#### **Features**

- Total output : 20W+20W (at  $V_{CC} = 13.5V$ ,  $R_L = 4\Omega$ , THD = 10%)
- High-fidelity design ( $f_L < 10$ Hz,  $f_H = 130$ kHz)
- Extremely low impulse noise levels
- An arbitrary amplifier startup time can be set up with external components.
- Full complement of built-in protection circuits (includes circuits that protect against shorting to V<sub>CC</sub>, shorting to ground, load shorting, overvoltages and excessive temperatures)

## **Specifications**

## **Maximum Ratings** at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V <sub>CC</sub> max	No signal	24	V
Maximum output current	I <sub>O</sub> peak	Per channel	4	Α
Allowable power dissipation	Pd max	With an arbitrarily large heat sink	32.5	W
Operating temperature	Topr		-20 to +85	°C
Storage temperature	Tstg		-40 to +150	°C

- Any and all SANYO Semiconductor Co.,Ltd. products described or contained herein are, with regard to "standard application", intended for the use as general electronics equipment (home appliances, AV equipment, communication device, office equipment, industrial equipment etc.). The products mentioned herein shall not be intended for use for any "special application" (medical equipment whose purpose is to sustain life, aerospace instrument, nuclear control device, burning appliances, transportation machine, traffic signal system, safety equipment etc.) that shall require extremely high level of reliability and can directly threaten human lives in case of failure or malfunction of the product or may cause harm to human bodies, nor shall they grant any guarantee thereof. If you should intend to use our products for applications outside the standard applications of our customer who is considering such use and/or outside the scope of our intended standard applications, please consult with us prior to the intended use. If there is no consultation or inquiry before the intended use, our customer shall be solely responsible for the use.
- Specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

# Operating Conditions at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Recommended supply voltage	Vcc		13.5	V
Recommended load resistance range	R <sub>L</sub> op		4 to 8	Ω
Allowable operating supply voltage range	V <sub>CC</sub> op		9 to 20	V


Note : With  $V_{CC}$ ,  $R_L$ , and the output level in ranges such that the Pd max for the heat sink used is not exceeded.


# Electrical Characteristics at $Ta=25^{\circ}C,\,V_{CC}=13.5V,\,R_{L}=4\Omega,\,f=1kHz,\,Rg=600\Omega$

Description	Symbol	O an distance	Ratings			1.1-4
Parameter		Conditions	min	typ	max	Unit
Quiescent current	Icco	With Rg = 0 and R <sub>L</sub> open. 70 130 250				
Standby mode current drain	l <sub>st</sub>	Standby mode (amplifier off), with no power supply capacitor.				
Voltage gain	V <sub>G</sub>	$V_{O} = 0$ dBm	38	40	42	dB
Total harmonic distortion	THD	P <sub>O</sub> = 1W, Filter = FLAT		0.06	0.2	%
Output power	$V_{CC} = 13.5V, THD = 10\%, R_L = 4\Omega$		16	20		W
	P <sub>O</sub> 2	$V_{CC}$ = 16.5V, THD = 10%, $R_L$ = $4\Omega$		30		W
Output offset voltage	V <sub>N</sub> offset	Rg = 0	-300		+300	mV
Output noise voltage	V <sub>NO</sub>	Rg = 0, BPF = 20Hz to 20kHz		0.1	0.5	mV
Ripple rejection ratio	SVRR	$Rg = 0, V_R = 0 dBm, f_R = 100 Hz$	40	50		dB
Channel separation	CHsep	$Rg = 10k\Omega$ , $V_O = 0dBm$	50	60		dB
Input resistance	Ri		21	30	39	ΚΩ
Standby pin applied voltage	VST	Amplifier on (applied through an external 10kΩ resistor)	2.5		Vcc	V


# **Package Dimensions**

unit : mm (typ) 3113B

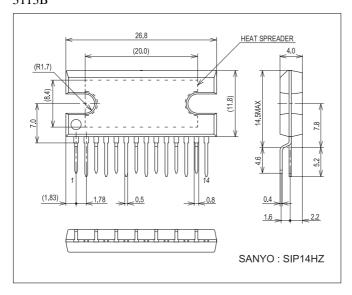



# **Block Diagram**

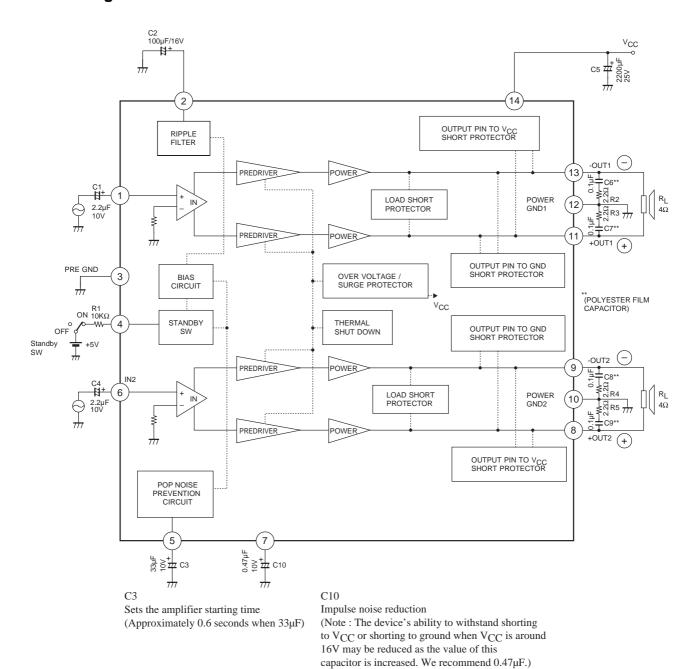

No.6632-3/8

# Pin Voltages

 $V_{CC} = 13.5V$ , with 5V applied to STBY through a  $10k\Omega$  resistor,  $R_L = 4\Omega$ ,  $R_S = 0$ 

Pin No.	1	2	3	4	5	6	7
Pin name	IN1	DC	PRE-GND	STBY	ON TIME	IN2	POP
Pin voltage	1.55V	6.63V	0V	3.21V	2.32V	1.55V	2.07V

Pin No.	8	9	10	11	12	13	14
Pin name	+OUT2	-OUT2	PWR-GND	+OUT1	PWR-GND	-OUT1	Vcc
Pin voltage	6.6V	6.5V	0V	6.5V	0V	6.6V	13.5V

# **External Components**

C1 and C4 : Input capacitors. A value of 2.2µF is recommended. Determine the polarity based on the DC

potential of the circuit connected directly to the LA4628 front end. Note that the low band response

can be adjusted by varying fL with the capacitors C1 and C4.

C2 : Decoupling capacitor (ripple filter)

C3 : Sets the amplifier starting time, which will be approximately 0.6 seconds for a value of  $33\mu F$ .

The starting time is proportional to the value of this capacitor, and can be set to any desired value.

C5 : Power-supply capacitor

C6, C7, C8, and C9

: Oscillation prevention capacitors. Use polyester film capacitors (Mylar capacitors) with excellent characteristics. (Note that the series resistors R2, R3, R4, and R5 are used in conjunction with these

capacitors to achieve stable amplifier operation.) A value of 0.1µF is recommended.

C10 : Impulse noise reduction capacitor. A value of  $0.47\mu F$  is recommended. Caution is required when

selecting the value for this capacitor, since increasing its value influences the operation of the circuits that protect against shorting the amplifier output pins to  $V_{CC}$  or to ground when higher  $V_{CC}$ 

voltages (approximately 16V or higher) are used.

R1 : Standby switch current limiting resistor. A value of  $10k\Omega$  is recommended when a voltage in the

range 2.5 to 13.5V will be applied as the standby switching voltage. Note that this resistor is not

optional: it must be included.

## **IC Internal Characteristics and Notes**

#### 1. Standby function

- Pin 4 is the standby switch. A voltage of 2.5V or higher must be applied through an external resistor to turn the amplifier on.
- If a voltage of over 13.5V will be applied as the standby mode switching voltage, use the following formula to determine the value of R1 so that the current entering at pin 4 remains under 500μA.

$$R1 = \frac{<\!applied\ voltage\!>\!-1.4}{500\mu A} - 10k\Omega$$

500μA or lower

10kΩ

Applied standby voltage

About 1.4V

(2V<sub>BE</sub>)

Pin 4 Internal Equivalent Circuit

#### 2. Muting function

• Pin 5 connects the capacitor that determines the starting time to prevent impulse noise. It can also be used to mute the amplifier output by shorting pin 5 to ground. When this function is used, the recovery time depends on C3.

#### 3. Impulse noise improvements

• While the LA4628 achieves a low level of impulse noise, if even further reductions in impulse noise at power on/off (and when switching into or out of standby mode) a 0.47µF capacitor may be inserted between pin 7 and the PRE GND pin (pin 3). (Pin 7 is the output amplifier bias pin. Since the ability to withstand shorting the output pins to VCC or ground is reduced for supply voltages over 16V if the pin 7 capacitance is large, we recommend a value of 0.47µF or lower for this capacitor.)

#### 4. Protection circuits


- Due to the system structure of the protection circuit for shorts to V<sub>CC</sub> or ground, if there is a DC resistance between the amplifier output pins and ground, the protection circuit may operate when power is first applied and the amplifier may fail to turn on. The basic design approach we recommend is not to adopt any designs in which there is a DC resistance between the amplifier outputs and ground.
- The LA4628 includes a built-in thermal protection circuit to prevent the IC from being damaged or destroyed if abnormally high temperatures occur. This thermal protection circuit gradually reduces the output if the IC junction temperature (Tj) reaches the range 170 to 180°C due to inadequate heat sinking or other problem. If the temperature falls, the amplifier will restart automatically.
- The LA4628 also includes other protection circuits. Use of these circuits also requires care during end product design and testing.


#### 5. Other notes


• The LA4628 is a BTL power amplifier. When testing this device, the ground systems for the test equipment connected to IC inputs, and that for the test equipment connected to IC outputs, must be isolated. Do not use a common ground.

#### **Printed Circuit Pattern**

(copper foil side)

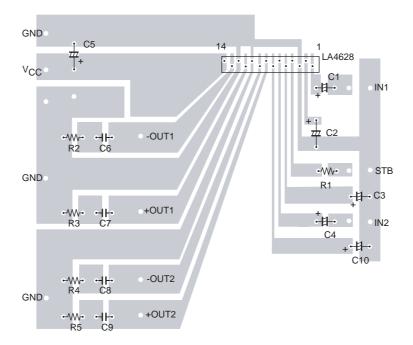

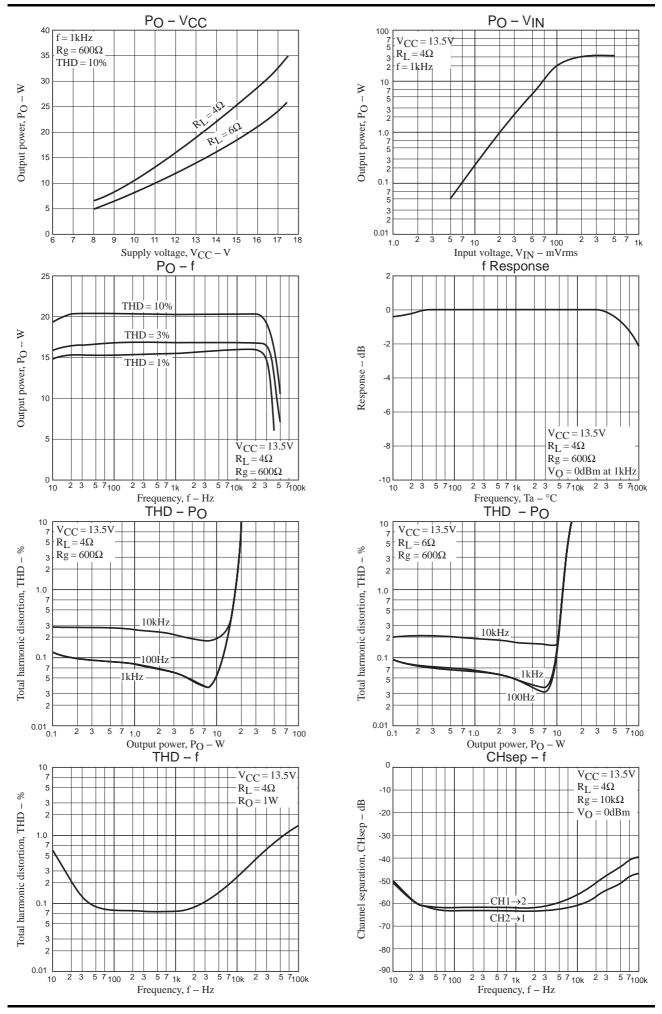

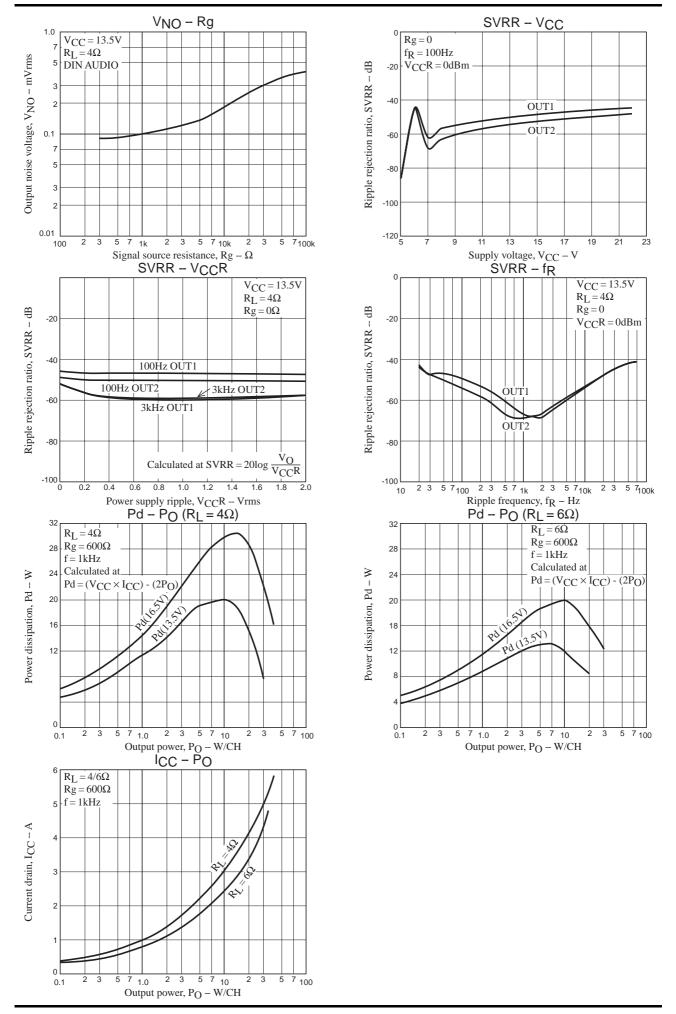

- SANYO Semiconductor Co.,Ltd. assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein.
- SANYO Semiconductor Co.,Ltd. strives to supply high-quality high-reliability products, however, any and all semiconductor products fail or malfunction with some probability. It is possible that these probabilistic failures or malfunction could give rise to accidents or events that could endanger human lives, trouble that could give rise to smoke or fire, or accidents that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO Semiconductor Co.,Ltd. products described or contained herein are controlled under any of applicable local export control laws and regulations, such products may require the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written consent of SANYO Semiconductor Co.,Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO Semiconductor Co.,Ltd. product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production.
- Upon using the technical information or products described herein, neither warranty nor license shall be granted with regard to intellectual property rights or any other rights of SANYO Semiconductor Co.,Ltd. or any third party. SANYO Semiconductor Co.,Ltd. shall not be liable for any claim or suits with regard to a third party's intellectual property rights which has resulted from the use of the technical information and products mentioned above.

This catalog provides information as of October, 2008. Specifications and information herein are subject to change without notice.