




This product is not fuse protected. User is responsible for providing system protection. Consult factory for application information.

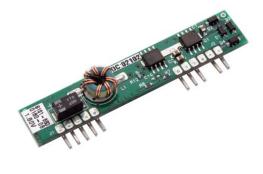

FEATURES

- Output Current up to 7A
- 5.0V ± 10% input
- Regulation ±0.4% Line and Load
- Industry Standard Pin Configuration
- High Efficiency To 90%
- Remote Sense, Trim and Enable
- Short Circuit Protection
- MTBF 3.9 million hours

Specifications *	S101-05					
INPUT SPECIFICATIONS						
Input voltage range	5.0V ± 10%	Measured at +Vin pin				
External input capacitor	Minimum 200µF with adequate ripple current rating	See also note on pg 6 and chart on pg 4				
OUTPUT SPECIFICATIONS						
	1.5V					
Chandard and and the sales and	1.8V	Standard setpoint accuracy varies ±1.3%.				
Standard output voltages and output current	2.1V	Contact factory for tighter tolerances. See note on pg 5 for trimming to different volt-				
	2.5V	ages.				
	3.3V					
Output current	7A	100 LFM at 70°C				
Load regulation	±0.4%	0 to 7A load				
Line regulation	±0.4%	Over specified input voltage range				
External output capacitor	$>150\mu F$ with maxESR = $100m\Omega$	See also note on pg 6				
Short circuit protection	200% of maximum rated current					
GENERAL SPECIFICATIONS						
Enable ***	ON - open or high / OFF - low					
Efficiency	90% for 3.3V	See efficiency curves on pg 4				
Isolation	Non-isolated					
Switching frequency	300 kHz	Constant				
Approvals and Standards	UL 94V-0					
Protection	Fusing	Unit is not fused.				
Operating Temperature ****	0°C to 60°C					
Storage Temperature	-40°C to 125°C	Non-condensing				
MTBF	4.1 million hours	Per RAC PRISM at 50°C ambient and 200 LFM				

^{*} All specifications are typical at nominal input, full load at 25°C unless otherwise stated.


open to enable the SIP.






^{****} Pull below 0.5V and sink greater than 1mA to disable the SIP; pull above 4V (do not exceed 12V) and source greater than 10μA or leave

^{****} The output capacitors must meet the max ESR = $100 \text{m}\Omega$ requirement over the operating temperature range.

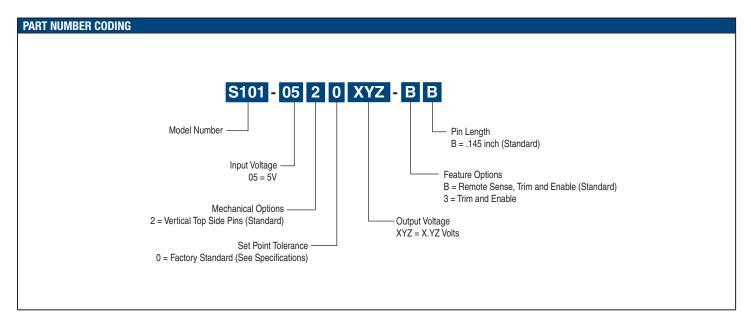

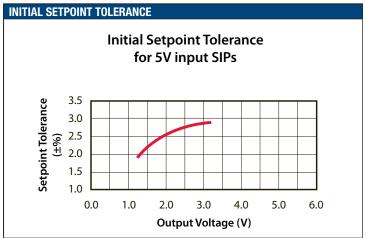


PIN ASSIGNMENT


CONNECTOR	PIN	FUNCTION	CONNECTOR	PIN	FUNCTION
J1	1	VOUT	J2	1	Ground
	2	VOUT		2	VIN
	3	Remote Sense		3	VIN
	4	VOUT		4	Empty
	5	Ground		5	Trim
				6	Enable

www.murata-ps.com email: sales@murata-ps.com

MECHANICAL DIMENSIONS

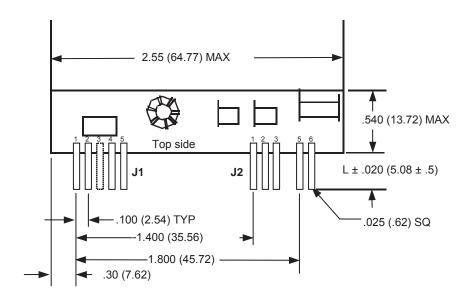


Mechanical Option 2




- * Recommended Customer Hole Size 0.046 ±.003 with 0.070 pad both sides
 - 1. Dimensions are in inches and (millimeters).
 - 2. Tolerances: (unless otherwise noted)

 $\begin{array}{ccc} & \underline{\text{Inches}} & \underline{\text{Millimeters}} \\ .XX \pm .020 & .X \pm 0.5 \\ .XXX \pm .010 & .XX \pm 0.25 \\ \\ \text{Pin:} & \pm .002 & \pm 0.05 \\ \end{array}$

www.murata-ps.com email: sales@murata-ps.com

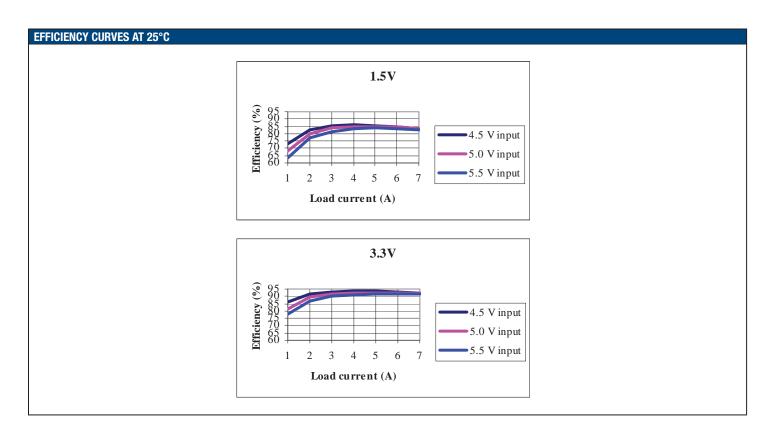

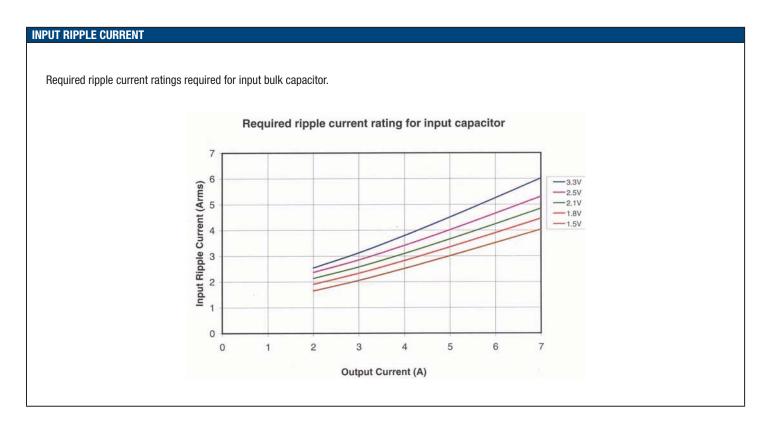

www.murata-ps.com email: sales@murata-ps.com

RESISTOR TRIM EQUATIONS

The S101 output voltage can be trimmed to a different value than the one set by the factory by using one external resistor. Check the following table for trimming range and use the appropriate trimming equation to calculate the value of the trim resistor.

V _{SET}	VREF	R8 (OHMS)	R7 (OHMS)	TRIM RANGE
1.5V	1.3V	9760	63400	1.3V - 1.8V
1.8V	1.5V	10000	49900	1.5V - 2.1V
2.1V	1.7V	11500	48700	1.7V - 2.5V
2.5V	2.1V	12100	63400	2.1V - 3.3V
3.3V	2.5V	11500	35700	2.5V - 3.5V

Trimming Up $(V_{OutUp} > V_{Set})$

Connect the Trim Up Resistor between the Trim pin (J1-5) and the Ground pin (J1-1).

$$R_{TrimUp} = \frac{1}{\left(\frac{V_{OutUp} - V_{Ref}}{R_8 * V_{Ref}} - \frac{1}{R_7}\right)}$$

Trimming Down (V_{Ref} < V_{Out Down} < V_{Set})

Connect the Trim Down Resistor between the Trim pin (J1-5) and the Remote Sense pin (J1-3). If the sense pin is not present, use the Vout pin (J1-1 or J1-2 or J1-4).

$$R_{TrimDown} = \frac{1}{\frac{V_{Ref}}{R_7(V_{OutDown} - V_{Ref})} - \frac{1}{R_8}}$$

Where:

VSet: the output setpoint (output voltage set by the factory, with no trim)

VOutUp: the desired output voltage (higher than VSet)

VOutDown: the desired output voltage (lower than VSet, but not lower than VRef)

VRef: see table R7, R8: see table

RTrimUp, RTrimDown: the resistance value of the trimming resistor

External Capacitance for SIP Products

All SIP products require external capacitance to be placed on the system board that the SIP will be designed into. This application note is an attempt to explain how to translate datasheet information and apply it to a system level board design.

INPUT CAPACITANCE

Although input capacitance value is not critical, the input capacitors must be capable of storing fairly large amounts of energy. This means, for example, small ceramic capacitors would be inappropriate. The primary criteria, though, for choosing the input capacitors is AC ripple current rating. The SIP datasheet contains a chart showing ripple current vs. output current (or output power). The system designer determines the maximum SIP output current required from the SIP. Based on that number, the chart will show a corresponding ripple current rating the designer needs to plan for when choosing input capacitors.

Example using SIP S101:

The designer knows the S101 is intended to provide 2.5V at maximum 5A. Using the S101 datasheet chart, this corresponds with 4A of ripple current. Also known is that the capacitor the designer hopes to use has a ripple current rating of 2.2A. Therefore, the designer must use two of the chosen capacitors in parallel for a total ripple current capability of 4.4A - which will be sufficient for the 4A requirement.

OUTPUT CAPACITANCE

The only requirement for capacitance value is for basic circuit stability of the SIP. That value is specified on the SIP datasheet—usually 150µF. The other consideration for output capacitance is the total effective ESR (Equivalent Series Resistance). As with ripple current, every capacitor has a specified ESR. When using multiple capacitors in parallel, this ESR is added exactly like parallel resistors. Therefore, more capacitors mean less ESR. The SIP datasheet specifies a maximum total ESR necessary for optimum SIP performance. The designer may also choose to add more capacitance to reduce output ripple and noise.

Example using SIP S101:

The S101 datasheet specifies a maximum ESR of $100 \, \text{m} \, \Omega$ for output capacitance. The system designer wants to use a capacitor with a specified ESR of $130 \, \text{m} \, \Omega$. Since $130 \, \text{m} \, \Omega$ is more than the needed $100 \, \text{m} \, \Omega$, two capacitors must be used in parallel for a total effective ESR of $65 \, \text{m} \, \Omega$.

Generally, good, low ESR bulk capacitors will be used for both input and output capacitance so that fewer capacitors are needed since board real estate is usually an important factor in today's designs.

Impact on Output Voltage Ripple and Transient Response

If the customer's application requires a very low output voltage ripple and / or very low output voltage overshoot / undershoot during transients, then the guidelines previously shown need to be exceeded and good layout practices become mandatory.

By using four 330 μ F OSCON capacitors, each having ESR = 17m Ω , the output voltage ripple can be decreased to 50mVpk-pk on a 1.2V output SIP. Also during a transient load condition (load current steps from 20% to 100% and back, at 2 A / μ sec) the output voltage does not overshoot / undershoot more than 100mV.

When fast and deep transient loads are expected, the input capacitor becomes important as well, especially if the SIP is far from its input voltage source. Capacitors having as much as $2000\mu F$ and combined ESR lower than $20m\Omega$ might be needed.

Practical results heavily depend on physical layout and specific load conditions. For critical applications the customer is encouraged to consult with the manufacturer.

Murata Power Solutions, Inc.
11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.
ISO 9001 and 14001 REGISTERED

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.