

| | | |
|----------------------------|--|---------------------|
| Title | Engineering Prototype Report for EP-18 10 W, Multiple Output, Isolated Power Supply with TOPSwitch[®]-GX | |
| Key Specifications | Input Voltage | 85-265 VAC |
| | Output Voltages and Current | 3.3 V, 1.5 A |
| | | 5 V, 0.9 A |
| | | 30 V, 0.03 A |
| | Output Power | 10 W |
| | Efficiency | 70% minimum |
| P.I. Device | TOP243P (TOPSwitch-GX) | |
| Target Applications | High Speed Digital Modems / Telecom | |
| Document Number | EPR-18 | |
| Date | 05-Dec-2002 | |
| Revision | 1.3 | |

Features

- Low cost (low component count with single sided printed circuit board)
- Low conducted EMI: meets CISPR22B/EN55022B without requiring a Y capacitor
- Meets EN/UL 1000-4-5 CLASS 4 (4 kV), using line overvoltage protection feature
- Designed to IEC60950 safety standard requirements
- Ultra-low earth leakage current (<1 μ A @ 265 VAC, 50/60 Hz) eliminates line frequency audio hum in voice applications ("ground loops")
- Compact Design (L = 113 mm, W = 39 mm, H = 25 mm)
- High efficiency (\geq 70% at 85 VAC)
- Line undervoltage shutdown prevents turn-off output glitches
- Line overvoltage shutdown provides extended line swell protection
- Hysteretic thermal shutdown provides automatic supply recovery after fault removal

Table Of Contents

| | | |
|-------|---|----|
| 1 | Introduction..... | 3 |
| 2 | Power Supply Specification | 4 |
| 3 | Schematic..... | 5 |
| 4 | Circuit Description | 6 |
| 5 | PCB Layout | 9 |
| 6 | Bill Of Materials | 10 |
| 7 | Transformer Specification..... | 11 |
| 7.1 | Electrical Specifications..... | 11 |
| 7.2 | Materials..... | 11 |
| 7.3 | Transformer Build Diagram | 12 |
| 7.4 | Transformer Construction..... | 12 |
| 7.5 | Design Notes..... | 13 |
| 7.6 | Transformer Sources..... | 13 |
| 8 | Transformer Spreadsheets..... | 15 |
| 9 | Performance Data | 17 |
| 9.1 | Efficiency..... | 17 |
| 9.2 | Regulation | 18 |
| 9.2.1 | Load | 18 |
| 9.2.2 | Line | 18 |
| 9.2.3 | Cross-Regulation Table..... | 19 |
| 10 | Thermal Performance | 20 |
| 11 | Waveform Scope Plots | 21 |
| 12 | Load Transient Response (75% to 100% Load Step)..... | 22 |
| 13 | Conducted EMI | 23 |
| 14 | Surge Voltage | 25 |
| 14.1 | Differential = Line-to-Line (L-N), 2 Ω Source Impedance. | 25 |
| 14.2 | Common Mode = Line-to-Ground (L-GND, N-GND), 12 Ω Source Impedance. | 25 |
| 15 | Revision History..... | 26 |

Important Note:

Although the EP-18 is designed to satisfy safety isolation requirements, the engineering prototype has not been agency approved. Therefore, all testing should be performed using an isolation transformer to provide the AC input to the prototype board.



1 Introduction

This document is an engineering report describing a low cost, isolated converter (EP-18) for a High Speed Digital Modem application.

Included are the power supply specification, schematic, bill of materials, transformer documentation, printed circuit layout, and performance data.

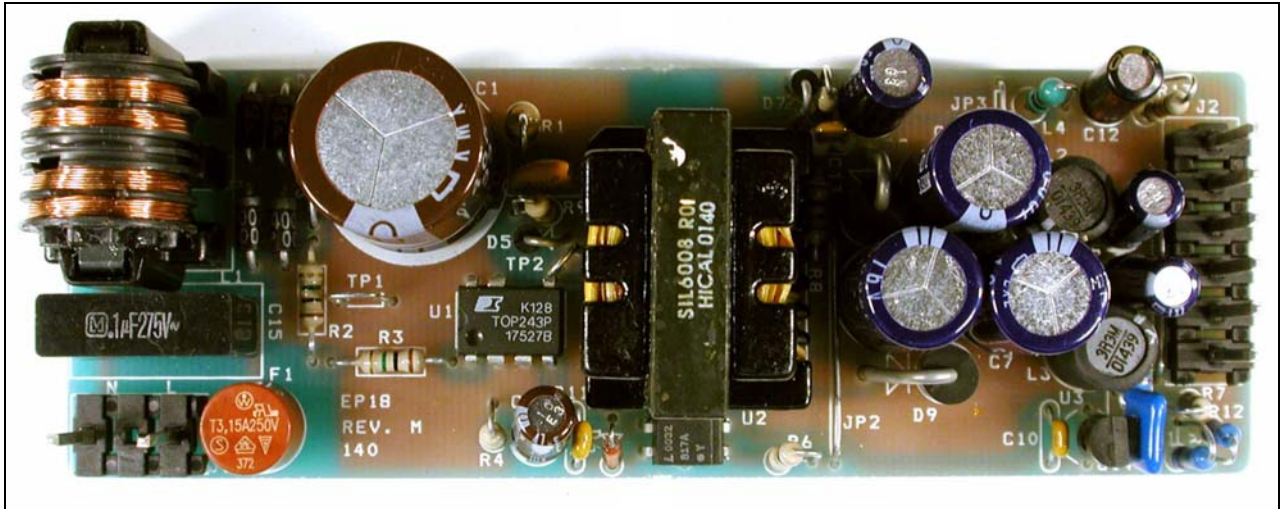


Figure 1 – EP-18 Populated Circuit Board (LxWxH: 113 mm x 39 mm x 25mm).


2 Power Supply Specification

| Description | Symbol | Min | Typ | Max | Units | Comment |
|---|--|------|------|------|-------|---------------------------------------|
| Input Voltage | V_{IN} | 85 | | 265 | VAC | 50/60 Hz |
| Output Output Voltage 1 | V_{OUT1} | 3.13 | 3.30 | 3.47 | V | ±5% Total Peak to Peak, 20 MHz BW |
| Output Ripple Voltage 1 | $V_{RIPPLE1}$ | | | 30 | mV | |
| Output Current 1 | I_{OUT1} | 0.3 | 1.5 | 3.00 | A | |
| Output Voltage 2 | V_{OUT2} | 4.75 | 5.00 | 5.25 | VDC | ±5% Total Peak to Peak, 20 MHz BW |
| Output Ripple Voltage 2 | $V_{RIPPLE2}$ | | | 50 | mV | |
| Output Current 2 | I_{OUT2} | 0.3 | 0.9 | | A | |
| Output Voltage 3 | V_{OUT3} | | 30 | | VDC | ±10% Total Peak to Peak, 20 MHz BW |
| Output Ripple Voltage 3 | $V_{RIPPLE3}$ | | | 150 | mV | |
| Output Current 3 | I_{OUT3} | 0.01 | 0.03 | | A | |
| Total Output Power Continuous Output Power | P_{OUT} | | | 10 | W | Full Load |
| Efficiency | η | 70 | | | % | Full Load, 25 °C, $V_{IN(MIN)}$ |
| Environmental Surge (differential, 2 Ω) | Line-Line | 2 | | | kV | IEC/UL 1000-4-5 Class 4 |
| Surge (common mode, 12 Ω) | Line/Line-PE | 4 | | | kV | IEC/UL 1000-4-5 Class 4 |
| Ambient Temperature | T_{AMB_EXT} | 0 | 25 | 50 | °C | External Ambient Range |
| Internal Ambient Temperature | T_{AMB_INT} | | | 70 | °C | Internal Case Ambient Range |
| Conducted EMI* | Meets CISPR22B with secondary connected to protective earth ground (PE) (worst case condition) | | | | | |
| Safety | Designed to exceed IEC60950 requirements | | | | | |

*Conducted EMI is met without a safety rated Y class capacitor bridging primary and secondary. This provides an ultra-low earth leakage current (<1 μ A at 265 VAC, 50/60 Hz) necessary to eliminate line frequency audio hum in voice applications (“ground loops”).



3 Schematic

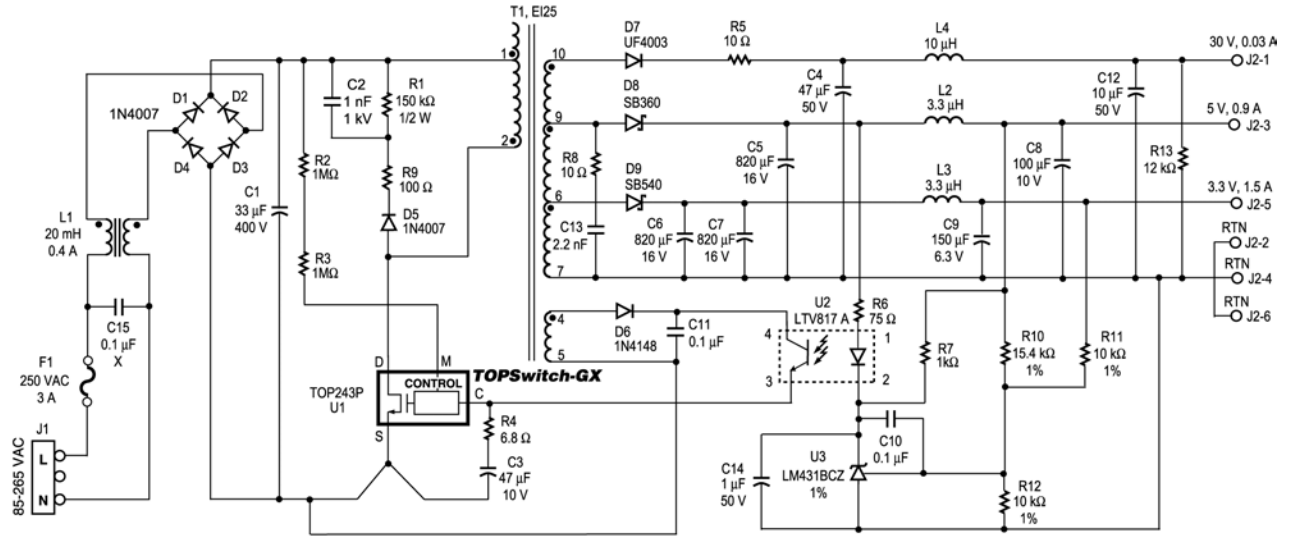

PI-3421-120602

Figure 2 - EP-18 Schematic.



4 Circuit Description

The EP-18 is a low-cost flyback switching power supply designed for high speed digital modem applications using the TOP243P integrated circuit. It offers a low cost solution with emphasis on low EMI and ultra-low earth leakage current (no Y cap).

The circuit schematic details a 10 W, 3 output (3.3 VDC, 5 VDC and 30 VDC) power supply that operates from an 85 VAC to 265 VAC input. The high efficiency (>70%) allows the power supply to operate within specifications at elevated ambient temperature.

The AC input is rectified and filtered by D1 to D4 and C1 to create a high voltage DC bus that is connected to transformer T1. The other side of T1 is driven by the high-voltage MOSFET of TOP243P¹ (U1). Fuse F1 protects against primary-side components failures, while U1 protects against secondary components failures, and overloaded/shorted outputs.

The combined value of the line sensing resistors R2 and R3, connected to the MULTI-FUNCTION (M) pin of U1, sets the undervoltage and overvoltage thresholds and provides a line feed forward function.

On increasing line voltage, the power supply is inhibited until the undervoltage (UV) threshold is reached (~100 VDC). On reducing line voltage, the UV function turns off the power supply when the line input voltage is below the UV threshold and the output goes out of regulation. This allows the power supply to continue operating at input voltages significantly below the UV threshold until output regulation is lost, but eliminates output glitches by preventing restart until the input voltage goes back above the UV threshold.

The overvoltage function turns off the power supply if the input voltage exceeds approximately 450 V. In the off-state, the power supply can withstand severe line transients or extended line swell conditions without damage. The supply resumes operation when the input voltage falls below the overvoltage threshold.

The line feed forward function independently modulates the duty cycle of U1 to reject the AC line frequency ripple component of the input voltage, reducing the line frequency ripple at the output of the supply. The output ripple specifications can be met without increased control loop gain since line feed forward operates independent of the main control loop. This simplifies the design of the power supply control loop.

A low cost RCD (R1, C2, R9 and D5) snubber circuit limits the turn-off voltage spike (caused by the leakage inductance) to a safe level on the DRAIN pin of U1. Resistor R9 is required in series with the slow recovery diode (D5) to reduce the diode reverse

¹ The "P" and "G" packages allow either line sensing or external current limit programming through the M pin. "Y" and "R" packages allow both functions via the L and X pins. Reducing the current limit in this design would allow a smaller transformer to be used, if desired.



recovery spike and damp the subsequent oscillations which might allow the drain to ring below source at low line.

The bias winding is rectified and filtered by D6 and C11 to power U1. Capacitor C3 is used to decouple the CONTROL pin, determine the auto-restart frequency and together with R4, forms part of the control loop compensation.

The secondary winding is rectified and filtered by D7, R5, C4 (30 V) D8, C5 (5 V) and D9, C7, C8 (3.3 V), with additional switching frequency ripple and high frequency spike noise filtering provided by L2, C8 (5 V) and L3, C9 (3.3 V) to give the DC outputs.

The choice of Schottky diodes for the 3.3 V and 5 V outputs was driven by both voltage regulation and efficiency considerations. Resistor R5 limits the diode current at start-up and avoids peak charging of the 30 V output. If a fusible resistor is used, R5 can provide short circuit protection for this output.

The snubber (C13 and R8) reduces the 10 MHz to 30 MHz conducted EMI due secondary leakage inductance. The current through the pre-load resistor R13 adds to the spec minimum load to keep the 30 V output in regulation. The 3.3 V and 5 V output voltages are determined by the voltage set at the adjust pin of U3 (shunt regulator) by the voltage divider formed by R10, R11 and R12. The current through R12 (250 μ A) sets the output voltages, while the current contribution of R10 and R11 (250 μ A total) sets the regulation band for 3.3 V and 5 V outputs, respectively. Other output voltages are possible by adjusting the transformer turns ratios, choosing the output diodes forward voltage drops and voltage divider settings. Optocoupler U2 applies the feedback signal from U3 to the CONTROL pin of U1. Resistor R6 is used to set the overall gain of the supply control loop, while R7 provides bias current for U3. Capacitor C10 provides frequency compensation for U3 stabilizing the power supply control loop. Capacitor C14 is used to close the feedback loop (bypassing U3) through optocoupler U2 during start-up, before U3 takes over the control loop. The ability to close the feedback loop in conjunction with the built-in soft-start feature of *TOPSwitch-GX* completely controls the start-up drain current profile, preventing transformer saturation and output overshoot.

The 3.3 V and 5 V secondary layout switching loops are minimized and, along with closely coupled transformer secondary windings, achieve low secondary leakage inductance and in turn, good cross-regulation. Optimizing the number of primary turns minimizes leakage. This also reduces the number of primary layers and improves primary to secondary coupling.

The power supply meets IEC60950/UL1950 safety requirements. Primary-to-secondary isolation is assured by using parts/materials (opto/transformer insulation) with the correct level of isolation and creepage distances (opto slot/transformer bobbin).

The power supply passed IEC/UL 1000-4-5, Class 4 line surge test (Class 3 only is required). All three outputs had monitor LEDs that showed no output disruption during the 90 high voltage surge pulses of Class 3. During Class 4 testing the outputs were



disrupted for one second (LEDs blinked indicating the operation of the overvoltage shutdown feature) when applying the 2 kV, 2 Ω differential pulse and the 4 kV, 2 Ω differential pulses (L1/GND, L2/GND) and were unaffected during the 4 kV, 12 Ω common-mode pulses (L1, L2/GND).

The switching frequency jitter of TOP243 (U1) allows the unit to meet worldwide conducted EMI standards using a low cost, common-mode inductor (L1) in combination with a small value capacitor (C15). Careful transformer construction and PCB layout eliminate the need for a Y-rated capacitor between primary and secondary. Removal of the Y cap is necessary in voice applications to eliminate line frequency audio hum (“ground loops”). The common-mode inductance of L1 and the transformer construction attenuate common-mode conducted emission currents caused by the switching waveform on the DRAIN of U1, charging and discharging various stray capacitances. The differential inductance of L1 together with C15 attenuate differential-mode emission currents caused by the fundamental and harmonics of the primary current waveform.

The power supply passed the conducted EMI test (CISPR22B). The extended scan (to 100 MHz) was performed to detect high frequency peaks that could cause problems in radiated emissions. A vertical and a horizontal bobbin transformer were both evaluated for EMI. The vertical bobbin had slightly lower EMI and was selected for the final prototype.



5 PCB Layout

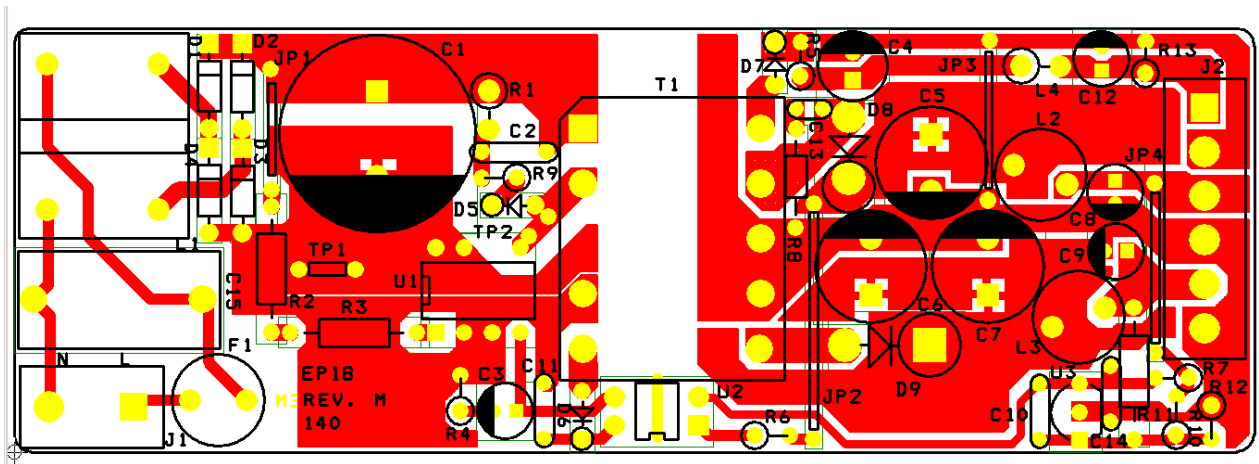


Figure 3 – EP18 Printed Circuit Layout. Actual Size Board (L = 113 mm, W = 39 mm, H = 25 mm).

For the drain-to-source voltage waveforms, connect the high voltage probe tip to TP2 and the probe ground to test point TP1.

For switching current waveforms, add a wire loop in the provided holes and cut open the copper trace. Use a Tektronix A6302 current probe and AM503 current probe amplifier (with TM501 power module) or equivalent.

6 Bill Of Materials

Bill Of Materials

| Item | Qty. | Ref. | Description | Part number | Manufacturer |
|------|------|---------|--|--------------------------------------|----------------------|
| 1 | 1 | C1 | 33 μ F, 400 V, 105 $^{\circ}$ C | KMX400VB33 | UCC |
| 2 | 1 | C2 | 1 nF, 1 kV, 6.5 mm, LS = 6.4mm | | Philips Centra |
| 3 | 1 | C3 | 47 μ F, 10 V | KME10VB47RMX11LL | UCC |
| 4 | 1 | C4 | 47 μ F, 10 V | LXZ50VB47RM6X11LL | UCC |
| 5 | 3 | C5-C7 | 820 μ F 16 V / 1000 μ F, 16 V | EEU-FC1C821 / LXZ216VB102M10X20LL | Panasonic UCC |
| 6 | 1 | C8 | 100 μ F, 10 V | LXZ10VB101M5X11LL | UCC |
| 7 | 1 | C9 | 150 μ F, 6.3 V | LXZ6.3VB151M5X11LL | UCC |
| 8 | 2 | C10,11 | 0.1 μ F, 50 V | K104M15Z5UF5TH5 | BC |
| 9 | 1 | C12 | 10 μ F, 50 V | EEU-FC1H100L | Panasonic |
| 10 | 1 | C13 | 2200 pF, 100 V, multilayer cer. | C315C222K1R5CA | Kemet |
| 11 | 1 | C14 | 1 μ F, 50 V, ceramic | | Any |
| 12 | 1 | C15 | 0.1 μ F 250 VAC, X1 | F1772-410-2000 | Vishay |
| 13 | 5 | D1-D5 | 1 A, 1000 V | 1N4007 | General Semi. |
| 14 | 1 | D6 | 0.15 A, 75 V, 4 ns | 1N4148 | General Semi. |
| 15 | 1 | D7 | 1 A, 200 V, 50 ns | UF4003/UF1003 | General Semi. |
| 16 | 1 | D8 | 3 A, 60 V, Schottky | SB360 | General Semi. |
| 17 | 1 | D9 | 5 A, 40 V, Schottky | SB540 | General Semi. |
| 18 | 1 | F1 | 250 VAC, 3.15 A | 19372K | Wickman |
| 19 | 1 | J1 | HEADER 3 | 26-48-1031 | Molex |
| 20 | 1 | J2 | HEADER 6 | 26-48-1061 | Molex |
| 21 | 1 | L1 | 20 mH, 0.4 A | SS11V-05230 | Tokin |
| 22 | 2 | L2, L3 | 3.3 μ H, 2.66 A | 822MY-3R3M | Toko |
| 23 | 1 | L4 | 10 μ H, 130 mA | | |
| 24 | 1 | R1 | 150 k Ω , 1/2 W | | Any |
| 25 | 2 | R2, R3 | 1 M Ω , 1/4 W | | Any |
| 26 | 1 | R4 | 6.8 Ω , 1/4 W | | Any |
| 27 | 2 | R5,R8 | 10 Ω , 1/4 W | | Any |
| 28 | 1 | R6 | 75 Ω , 1/4 W | | Any |
| 29 | 1 | R7 | 1 k Ω , 1/4 W | | Any |
| 30 | 1 | R9 | 100 Ω , 1/4 W | | Any |
| 31 | 1 | R10 | 15.4 k Ω \pm 1%, 1/4 W | | Any |
| 32 | 2 | R11,R12 | 10.0 k Ω \pm 1%, 1/4 W | | Any |
| 33 | 1 | R13 | 12 k Ω , 1/4 W | | Any |
| 34 | 1 | T1 | EI25 XFMR (custom) | SIL6008 Rev D | HiCal |
| 35 | 1 | U1 | TOPSwitch-GX | TOP243P | Power Integrations |
| 36 | 1 | U2 | Optocoupler | LTV817A | Liteon |
| 37 | 1 | U3 | Shunt Regulator, 2.5 V 1% | LM431BCZ | National Semiconduct |



7 Transformer Specification

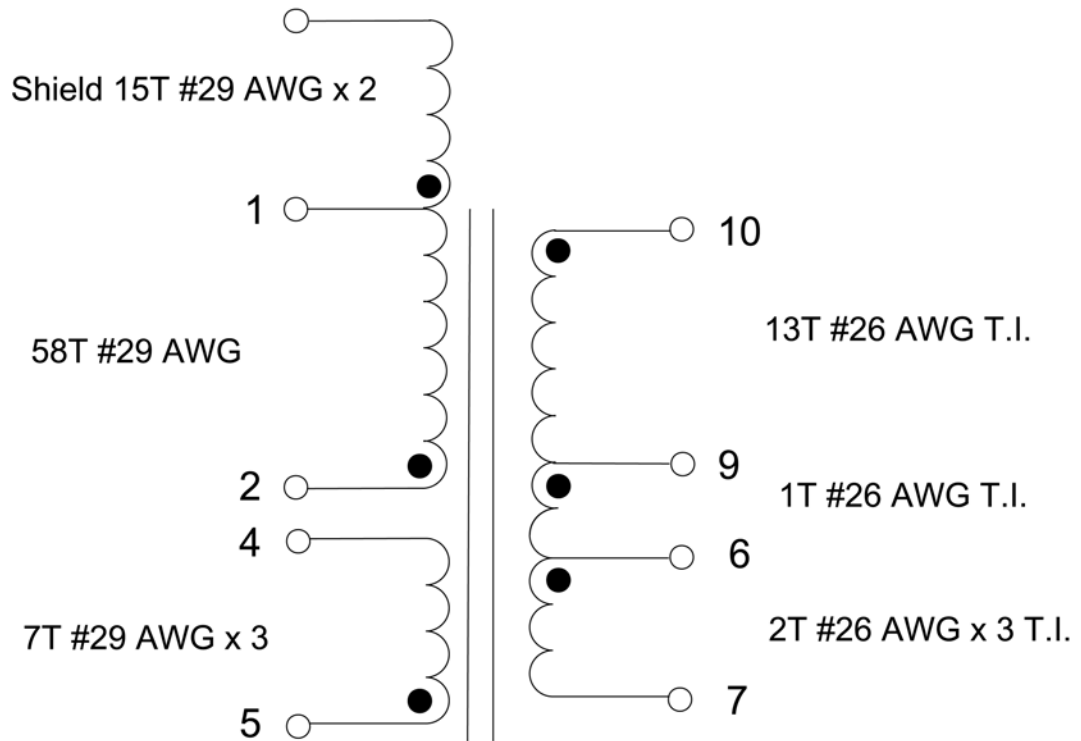


Figure 4 - EP18 Transformer Electrical Diagram.

7.1 Electrical Specifications

| | | |
|-----------------------------------|--|---------------------|
| Electrical Strength | 1 minute, 60 Hz, from Pins 1-5 to Pins 6-10 | 3000 VAC |
| Primary Inductance | Pins 1-2, all windings open, 130 kHz measurement frequency | 1180 μ H +/-10% |
| Resonant Frequency | Pins 1-2, all windings open | 0.5 MHz minimum |
| Primary Leakage Inductance | Pins 1-2, Pins 6-10 shorted, 130 kHz measurement frequency | 30 μ H maximum |

7.2 Materials

| Item | Description |
|------|--|
| [1] | Core: EI25, Nippon Ceramic FEI-25, NC-2H material or equivalent, gapped for AL of 351 nH/T ² . Note: Core longer than standard EI25. |
| [2] | Bobbin: YW-360-02B by YIH-HWA Enterprise, 10 PIN, with secondary-side pedestal. Pin 3 removed. |
| [3] | Magnet Wire: #29 AWG Heavy Nyleze |
| [4] | Triple Insulated Wire (TIW): #26 AWG |
| [5] | Tape: 3M 1298 Polyester Film (white) 10.58 mm wide by 2.2 mm thick |
| [6] | Varnish |

7.3 Transformer Build Diagram

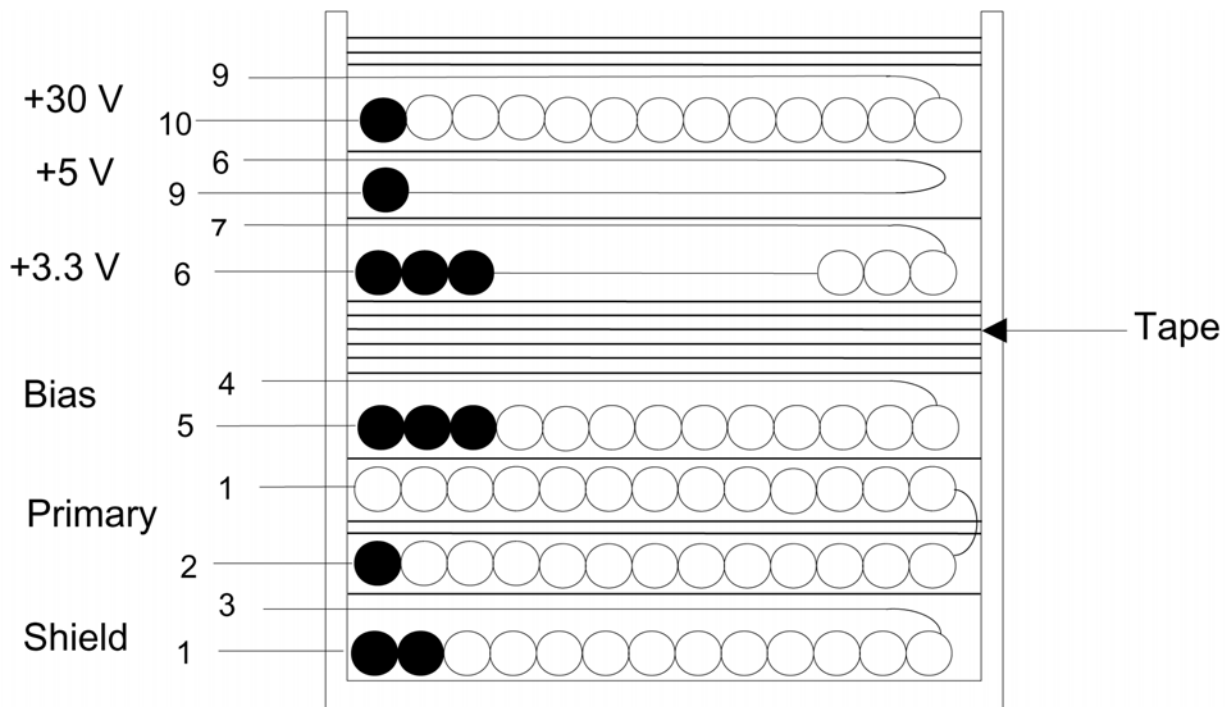


Figure 5 – EP18 Transformer Build Diagram.

7.4 Transformer Construction

| | |
|-----------------------------|--|
| Shield | Start at Pin 1. Wind 15 turns of item [3], bifilar parallel, from left to right, over entire length of the bobbin. Finish on Pin 3. |
| Tape Insulation | 1 Layer of tape [5] for insulation |
| Double Primary Layer | Start at Pin 2. Wind 30 turns of item [3] from left to right over entire length of the bobbin. Apply 2 layers of tape, item [5], for spacing . Wind remaining 28 turns in the next layer from right to left, over entire length of the bobbin. Finish on Pin 1. |
| Tape Insulation | 1 Layer of tape [5] for insulation. |
| Bias Winding | Start at Pin 5. Wind 7 turns parallel trifilar of item [3] from left to right, uniformly over entire width of bobbin . Finish on Pin 4. |
| Tape Insulation | 6 Layers of tape [5] for spacing . |
| 3.3 V Winding | Start at Pin 6. Wind 2 turns parallel trifilar of item [4] from left to right, uniformly over entire width of bobbin . Finish on Pin 7. Secure turns with 1 layer of tape. |
| 5 V Winding | Start at Pin 9. Wind 1 turn of item [4] from left to right over entire width of bobbin . Finish on Pin 6. Secure turns with 1 layer of tape. |
| 30 V Winding | Start at Pin 10. Wind 13 of item [4] from left to right uniformly, over entire width of bobbin. Finish on Pin 9. |
| Tape Insulation | 3 Layers of tape [5] for insulation. |
| Final Assembly | Assemble core with the “I” side on top . Secure core. Dip varnish the transformer [6]. |



7.5 Design Notes

| | |
|---------------------------|--------------------------|
| Power Integrations Device | TOP243P |
| Frequency of Operation | 132 kHz |
| Mode | Continuous/Discontinuous |
| Peak Primary Current | 0.42 A |
| Reflected Voltage | 110 V |
| Maximum DC Input | 375 V |
| Minimum DC Input | 90 V |

7.6 Transformer Sources

For information on the vendors used to source the transformers used on this board, please visit the *Power Integrations'* Web site at the URL below and select "Engineering Prototype Boards"

<http://www.powerint.com/componentsuppliers.htm>



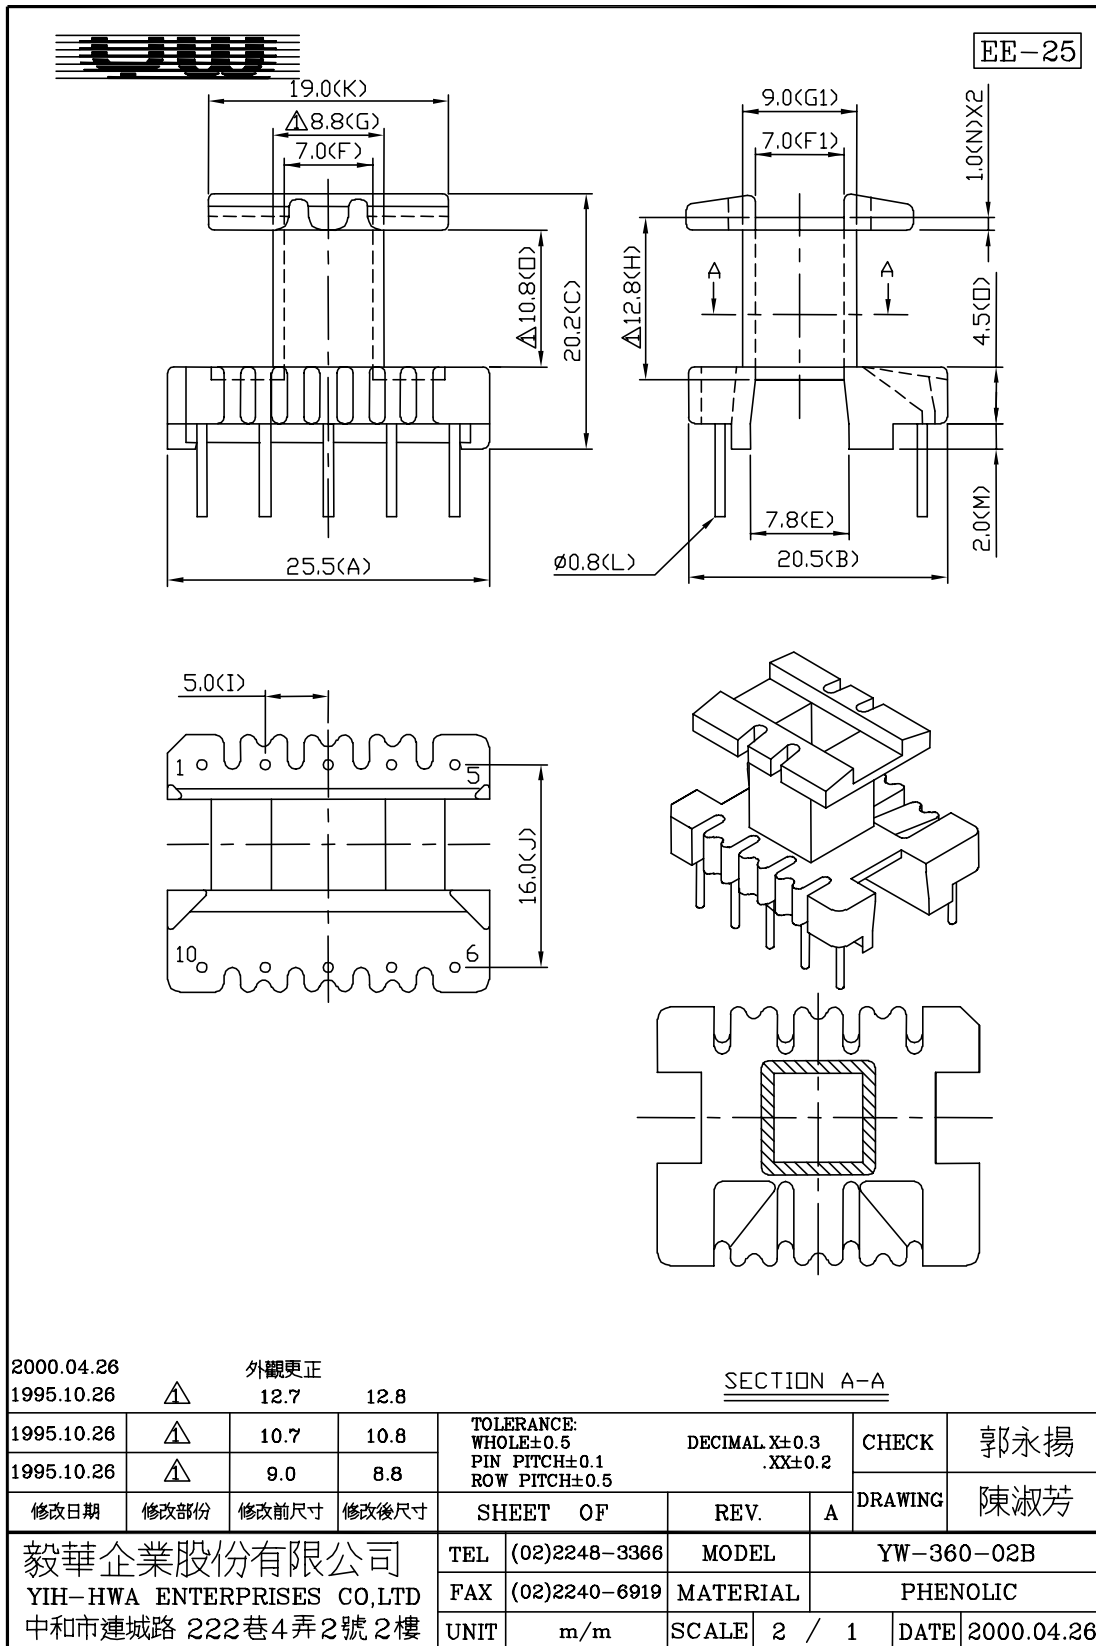


Figure 6 - E125 Bobbin Drawing.



8 Transformer Spreadsheets

Power Supply Input

| | | | | | | |
|--------|----------|------|--|--|--|---|
| VACMIN | Volts | 85 | | | | Minimum AC Input Voltage |
| VACMAX | Volts | 265 | | | | Maximum AC Input Voltage |
| FL | Hertz | 50 | | | | AC Main Frequency |
| TC | mSeconds | 2.33 | | | | Bridge Rectifier Conduction Time Estimate |
| Z | | 0.65 | | | | Loss Allocation Factor |
| N | % | 75.0 | | | | Efficiency Estimate |

Power Supply Outputs

| | | | Out1 | Out2 | Out3 | |
|-----|-------|-------|-------|-------|-------|-----------------------------|
| Vox | Volts | | 3.30 | 5.00 | 30.00 | Output Voltage |
| Iox | Amps | | 1.500 | 0.900 | 0.030 | Power Supply Output Current |
| VB | Volts | 12.00 | | | | Bias Voltage |
| IB | Amps | 0.000 | | | | Bias Current |

Device Variables

| Device | | TOP243P | | | | Device Name |
|-----------|-------|---------|--|--|--|--|
| PO | Watts | 10.35 | | | | Total Output Power |
| VDRAIN | Volts | 626 | | | | Maximum Drain Voltage Estimate (Includes Effect of Leakage Inductance) |
| VDS | Volts | 3.6 | | | | Device On-State Drain to Source Voltage |
| FS | Hertz | 132000 | | | | Device Switching Frequency |
| KRPKDP | | 0.70 | | | | Ripple to Peak Current Ratio |
| KI | | 1.00 | | | | External Current Limit Ratio |
| ILIMITEXT | Amps | 0.70 | | | | Device Current Limit, External Mimimum |
| ILIMITMIN | Amps | 0.70 | | | | Device Current Limit, Minimum |
| ILIMITMAX | Amps | 0.80 | | | | Device Current Limit, Maximum |
| IP | Amps | 0.42 | | | | Peak Primary Current |
| IRMS | Amps | 0.22 | | | | Primary RMS Current |
| DMAX | | 0.56 | | | | Maximum Duty Cycle |

Power Supply Components Selection

| | | | | | | |
|------|---------|------|--|--|--|---|
| CIN | μFarads | 33.0 | | | | Input Filter Capacitor |
| VMIN | Volts | 90 | | | | Minimum DC Input Voltage |
| VMAX | Volts | 375 | | | | Maximum DC Input Voltage |
| VCLO | Volts | 170 | | | | Clamp Zener Voltage |
| PZ | W | 1.3 | | | | Estimated Primary Zener Clamp Loss |
| VDB | Volts | 0.7 | | | | Bias Winding Diode Forward Voltage Drop |
| PIVB | Volts | 55 | | | | Bias Rectifier Maximum Peak Inverse Voltage |



Power Supply Output Parameters

| | | | | | | |
|----------|-------|--|------|------|------|---|
| VDx | Volts | | 0.5 | 0.5 | 0.7 | Output Winding Diode Forward Voltage Drop |
| PIVSx | Volts | | 16 | 24 | 135 | Output Rectifier Maximum Peak Inverse Voltage |
| ISPx | Amps | | 5.55 | 3.33 | 0.11 | Peak Secondary Current |
| ISRMSx | Amps | | 2.50 | 1.50 | 0.05 | Secondary RMS Current |
| IRIPPLEx | Amps | | 2.01 | 1.20 | 0.04 | Output Capacitor RMS Ripple Current |

Transformer Construction Parameters

| | | | | | | |
|---------------|-------------------|---------|--|--|--|---|
| Core/Bobbin | | EI25 | | | | Core and Bobbin Type |
| Core Manuf. | | Generic | | | | Core Manufacturing |
| Bobbin Manuf. | | Generic | | | | Bobbin Manufacturing |
| LP | μHenries | 1177 | | | | Primary Inductance |
| NP | | 58 | | | | Primary Winding Number of Turns |
| NB | | 6.68 | | | | Bias Winding Number of Turns |
| AWG | AWG | 30 | | | | Primary Wire Gauge (Rounded to next smaller standard AWG value) |
| CMA | Cmils/A | 472 | | | | Primary Winding Current Capacity (200 < CMA < 500) |
| VOR | Volts | 110.00 | | | | Reflected Output Voltage |
| BW | mm | 9.80 | | | | Bobbin Physical Winding Width |
| M | mm | 0.0 | | | | Safety Margin Width |
| L | | 2.0 | | | | Number of Primary Layers |
| AE | cm ² | 0.41 | | | | Core Effective Cross Section Area |
| ALG | nH/T ² | 351 | | | | Gapped Core Effective Inductance |
| BM | Gauss | 2093 | | | | Maximum Operating Flux Density |
| BP | Gauss | 3977 | | | | Peak Flux Density (Bp < 4200) |
| BAC | Gauss | 733 | | | | AC Flux Density for Core Curves |
| LG | mm | 0.12 | | | | Gap Length (Lg > 0.051 for TOP22X, Lg > 0.1 for TOP23X) |
| LL | μH | 23.5 | | | | Estimated Transformer Primary Leakage Inductance |
| LSEC | nH | 20 | | | | Estimated Secondary Trace Inductance |

Secondary Parameters

| | | | | | | |
|------------------|-------|--|---------|---------|---------|--|
| NSx | | | 2.00 | 2.89 | 16.16 | Secondary Number of Turns |
| Rounded Down NSx | | | | 2 | 16 | Rounded to Integer Secondary Number of Turns |
| Rounded Down Vox | Volts | | | 3.30 | 29.70 | Auxiliary Output Voltage for Rounded to Integer NSx |
| Rounded Up NSx | | | | 3 | 17 | Rounded to Next Integer Secondary Number of Turns |
| Rounded Up Vox | Volts | | | 5.20 | 31.60 | Auxiliary Output Voltage for Rounded to Next Integer NSx |
| AWGSx Range | AWG | | 20 – 24 | 22 – 26 | 37 – 41 | Secondary Wire Gauge Range (CMA range 500 – 200). |



9 Performance Data

All measurements performed at room temperature, 60 Hz input frequency.

TEST EQUIPMENT

INPUT: VOLTECH (PM100) AC POWER ANALYSER.
 Power Line Meter (EPD Inc.)
 OUTPUT: KIKUSUI (PLZ153W) ELECTRONIC LOAD.

9.1 Efficiency

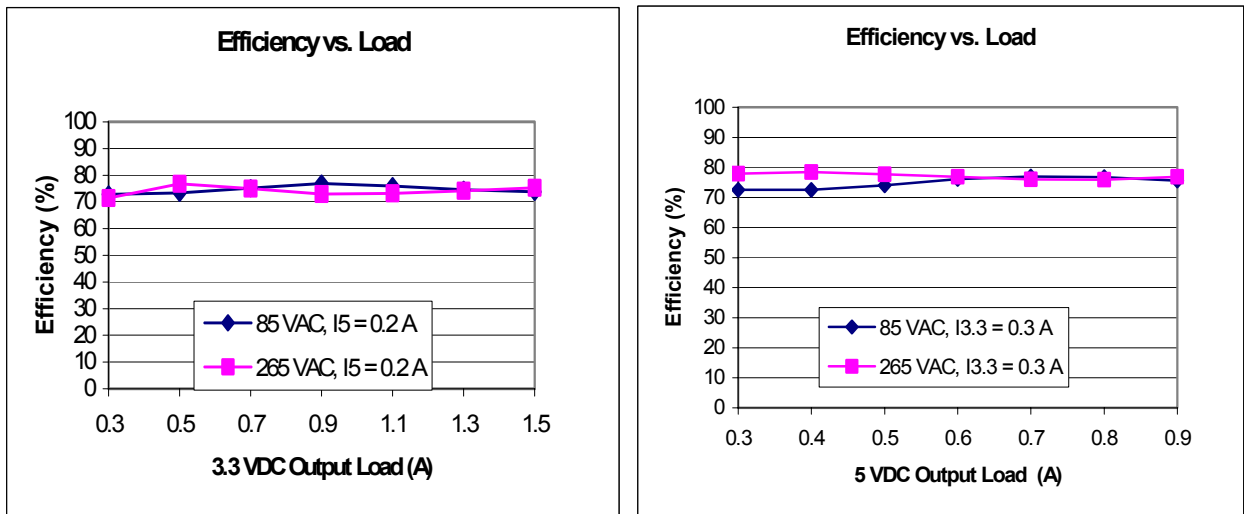


Figure 7 - Efficiency vs. Output Load.

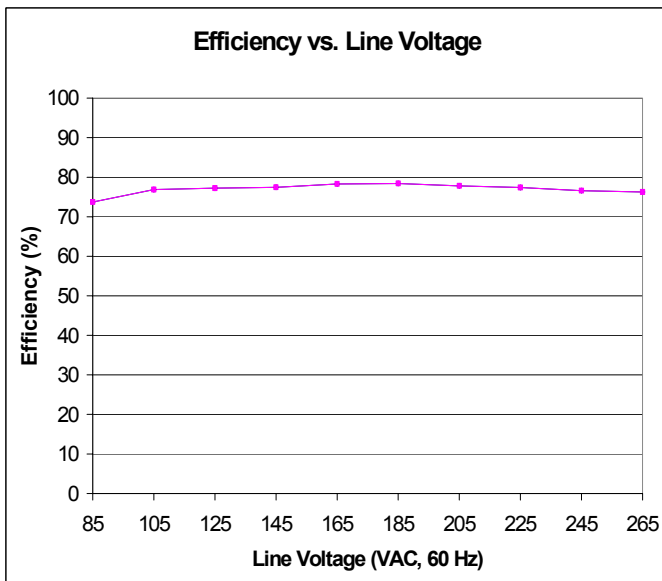


Figure 8 - Efficiency vs. Input Voltage at Full Load.



9.2 Regulation

9.2.1 Load

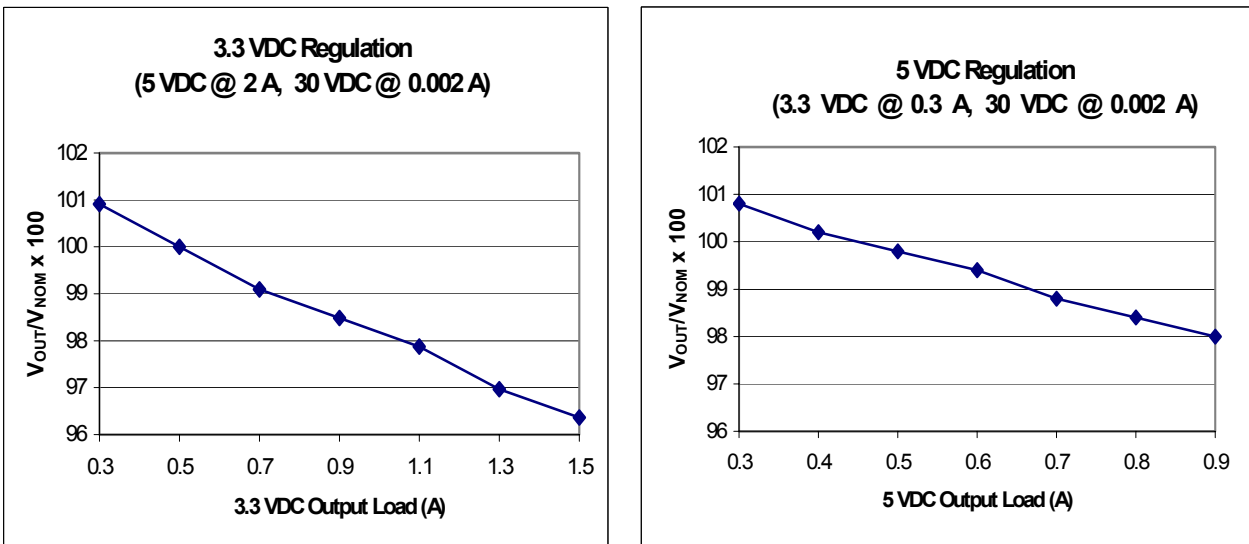


Figure 9 - Load Regulation at 85 VAC.

9.2.2 Line

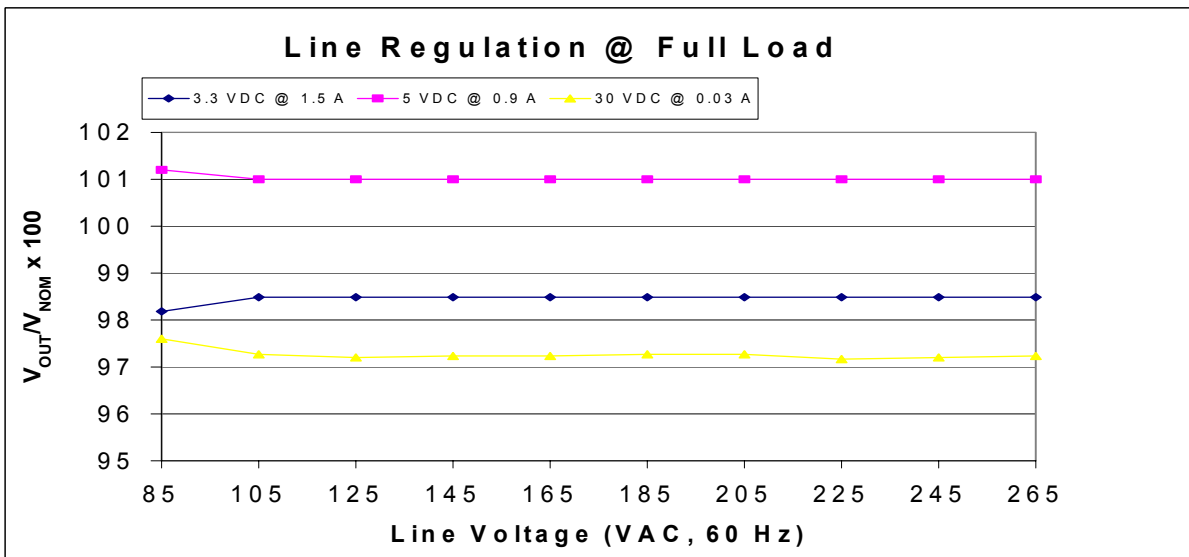


Figure 10 - Line Regulation at Full Load.



9.2.3 Cross-Regulation Table

| V _{OUT} (VDC) @ min (0), max (1) load, V _{IN} = 85 VAC, 60 Hz | | | | | | 33 | 5.25 | 3.465 |
|---|------|---------|------|-----|-----|----|------|-------|
| 30 | 5 | 3.3 | 30 | 5 | 3.3 | 30 | 5 | 3.3 |
| 28.9 | 5.03 | 3.33 | 0 | 0 | 0 | 27 | 4.75 | 3.135 |
| 31.5 | 5.2 | 3.18 | 0 | 0 | 1 | | | |
| 30.6 | 4.88 | 3.41 | 0 | 1 | 0 | | | |
| 33 | 5.05 | 3.25 | 0 | 1 | 1 | | | |
| 27.5 | 5.04 | 3.33 | 1 | 0 | 0 | | | |
| 28.7 | 5.2 | 3.18 | 1 | 0 | 1 | | | |
| 28.2 | 4.9 | 3.4 | 1 | 1 | 0 | | | |
| 29.7 | 5.06 | 3.25 | 1 | 1 | 1 | | | |
| | | Min (A) | 0.01 | 0.3 | 0.3 | | | |
| | | Max (A) | 0.03 | 0.9 | 1.5 | | | |



10 Thermal Performance

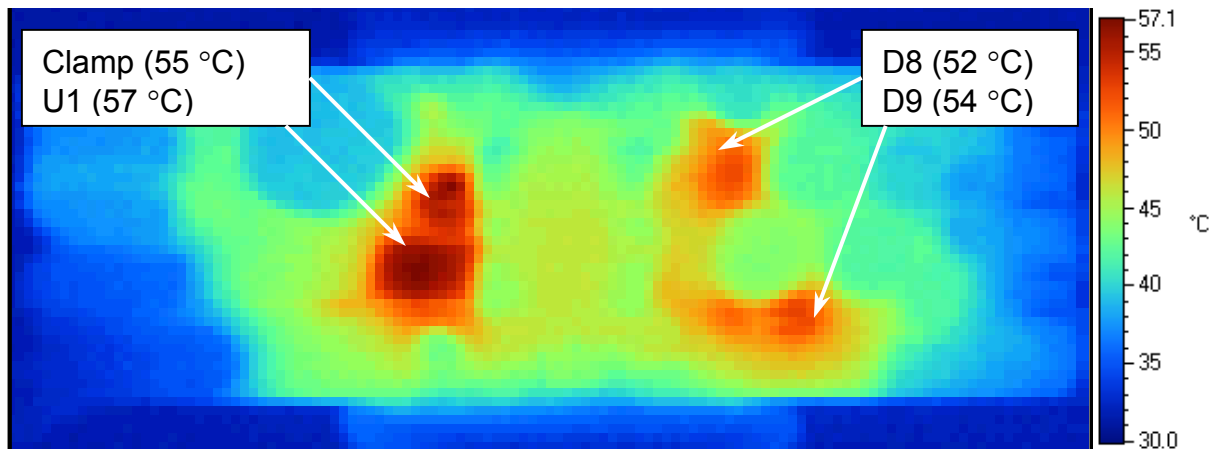


Figure 11 - Infrared Thermograph of EP18, 85 VAC Input, Full Load, 25 °C Ambient



11 Waveform Scope Plots

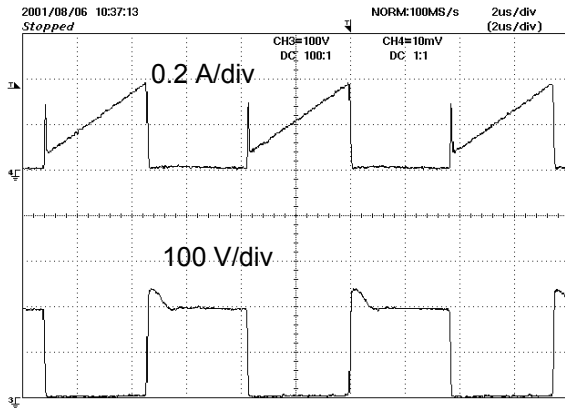


Figure 12 - Drain Current and Drain-to-source Voltage at Full Load ($V_{IN} = 85 \text{ VAC}$, 60 Hz).

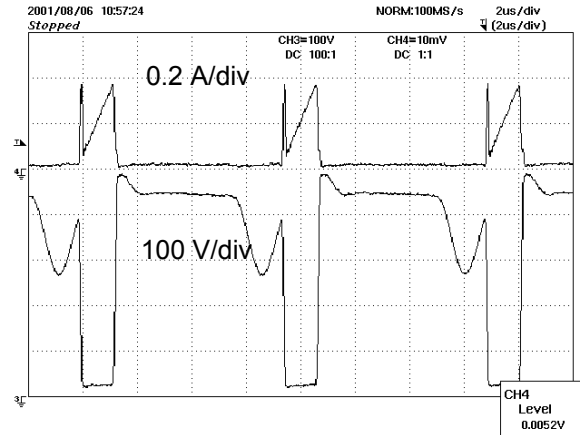


Figure 13 - Drain Current and Drain-to-source Voltage at Full Load ($V_{IN} = 265 \text{ VAC}$, 60 Hz).

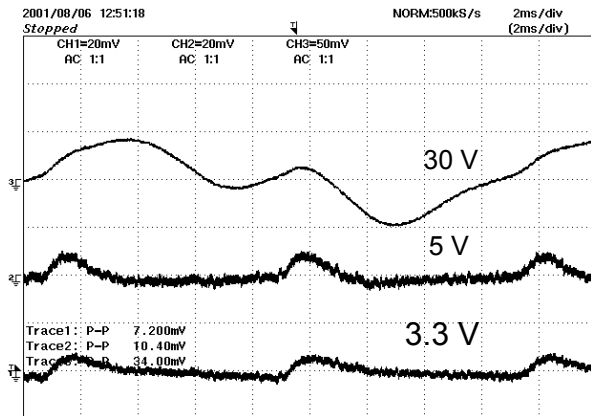


Figure 14 - Output Voltage Ripple at Full Load ($V_{IN} = 85 \text{ VAC}$ In, 60 Hz).

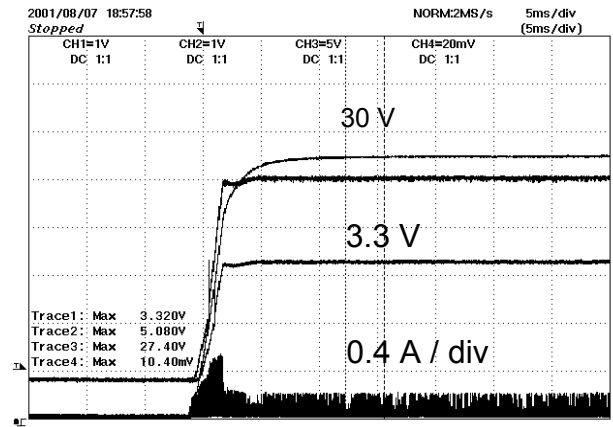


Figure 15 - Primary Current and Output Voltages During Start-up at Minimum Load ($V_{IN} = 265 \text{ VAC}$ In, 60 Hz).



12 Load Transient Response (75% to 100% Load Step)

Transient response is measured by changing the load, at twice the input line frequency, from 75% and 100%. The peak of the output voltage response is controlled by the output capacitor ESR while the recovery time is controlled by the output filter and the loop response.

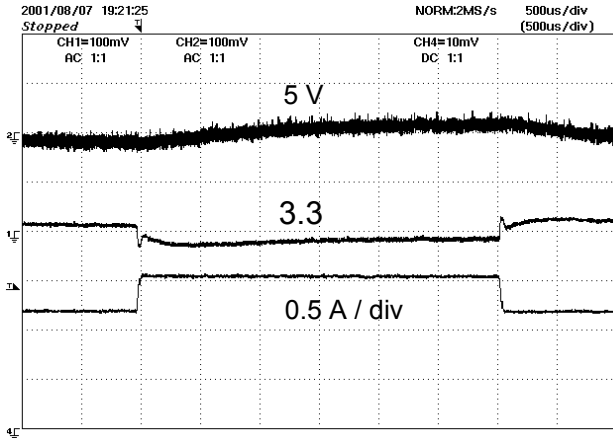


Figure 16 - 3.3 V and 5 VDC Response to 3.3 V Load Step 75% - 100% (1.125 A to 1.5 A) at 85 VAC (5 V @ 0.9 A).

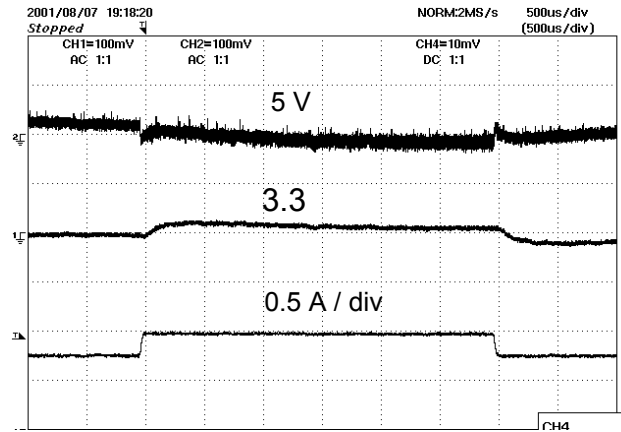


Figure 17 - 3.3 V and 5 VDC Response to 5 V Load Step 75% - 100% (0.9 A to 0.675 A) at 85 VAC (3.3 V @ 1.5 A).

The stability of the power supply under various line and load conditions can be confirmed by observing the phase margin at crossover (0 dB) and the attenuation (-dB) at positive feedback ($\geq 360^\circ$ Phase).

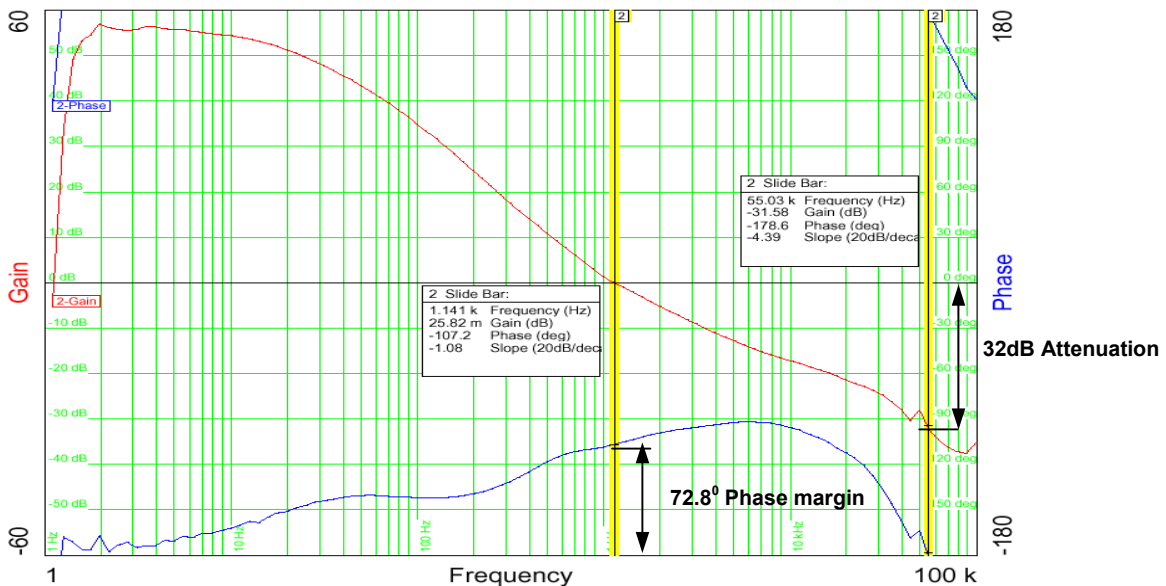


Figure 18 - Worst Case Phase Margin and Gain (Full Load VAC).



13 Conducted EMI

The attached plots show worst-case EMI performance for EP-18 as compared to CISPR22B conducted emissions limits. The scans were extended to 70 MHz or 100 MHz to detect possible peaks that could radiate from the input/output conductors.

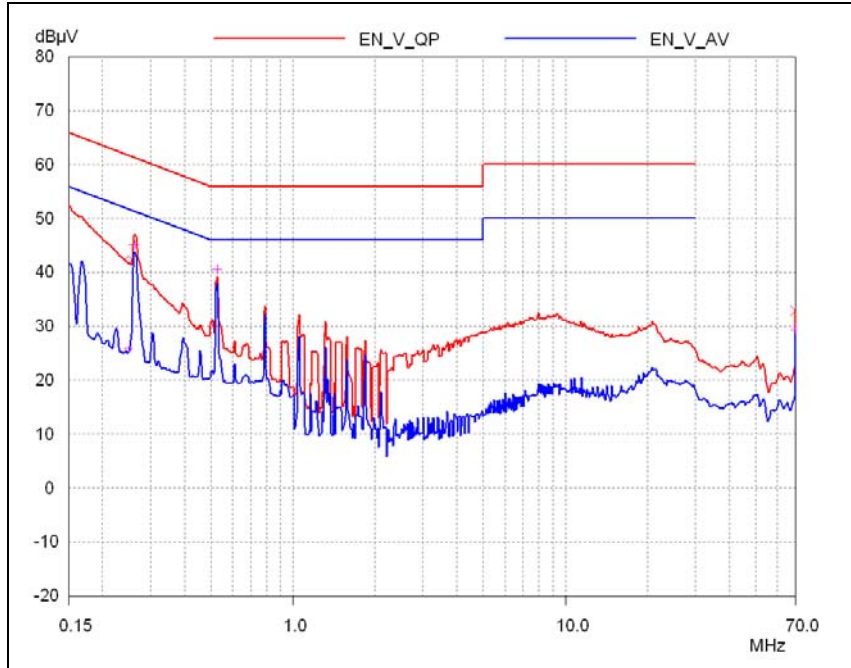


Figure 19 - Conducted EMI Results - Full Load, 115 VAC, Output RTN Floating.

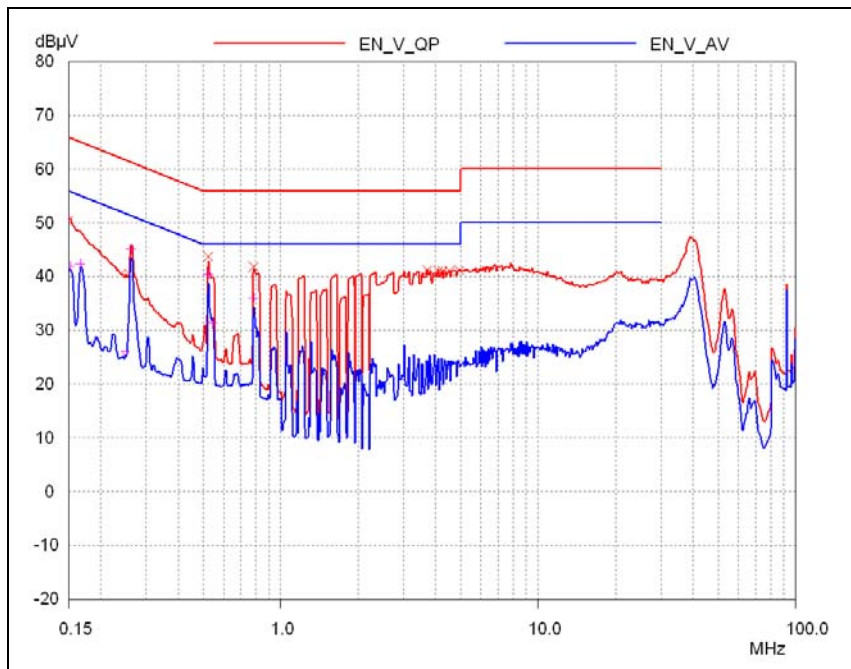


Figure 20 - Conducted EMI Results - Full Load, 115 VAC, Output RTN Grounded to PE.



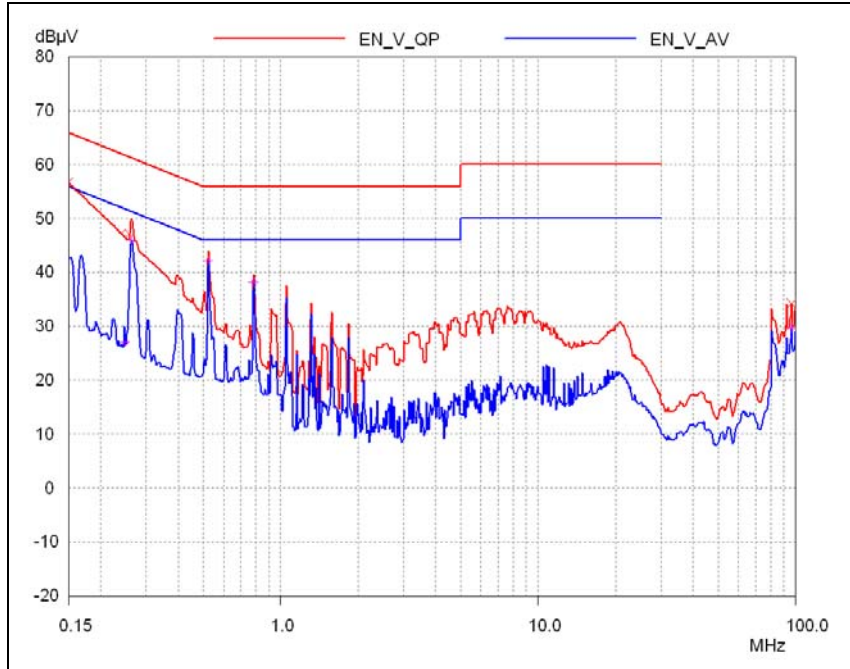


Figure 21 - Conducted EMI Results - Full Load, 230 VAC, Output RTN Floating.

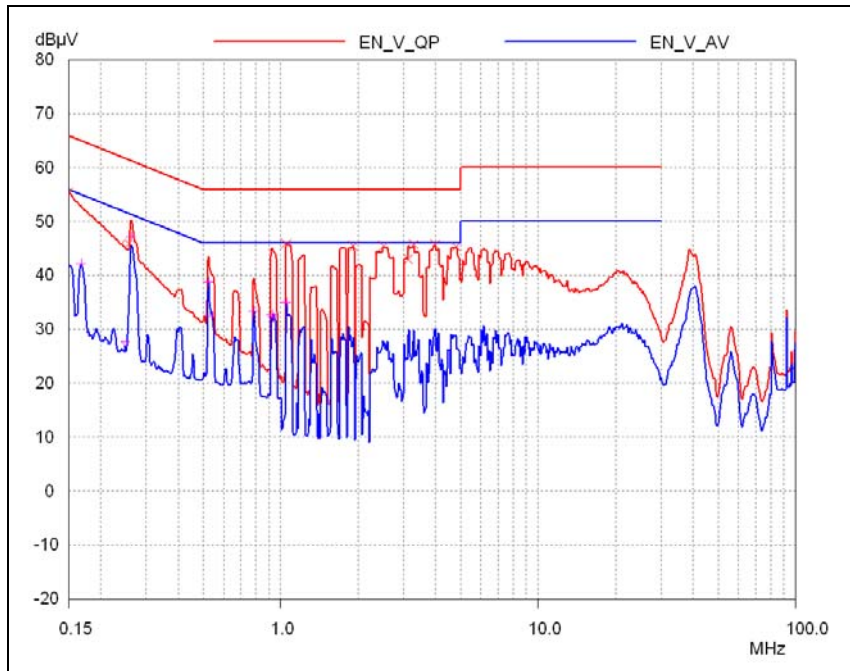


Figure 22 - Conducted EMI Results - Full Load, 230 VAC, Output Grounded to PE.



14 Surge Voltage

14.1 Differential = Line-to-Line (L-N), 2 Ω Source Impedance.

The unit exceeded the 1 kV IEC/UL 1000-4-5 Class 3 requirement (meets Class 4, 2 kV).

14.2 Common Mode = Line-to-Ground (L-GND, N-GND), 12 Ω Source Impedance

The unit exceeded the IEC/UL 1000-4-5 Class 3, 2 kV, meeting Class 4, 4 kV requirements.

All three outputs had monitor LEDs that showed no output disruption during the 90 high voltage surge pulses of Class 3 (FAST).

During Class 4 testing, the outputs were disrupted for one second (LEDs blinked) when applying the 2 kV, 2 Ω differential pulse and the 4 kV, 12 Ω differential pulses (L1/GND, L2/GND), indicating the overvoltage shutdown protection was triggered.

The outputs were unaffected during the 4 kV, 12 Ω common mode pulses (L1, L2/GND).

The unit was centered on the insulation side of a 6 in x 4 in single sided copper clad board (1.4 mm insulation), to avoid surface or insulation breakdown during the voltage surges.

The voltage was applied between the input terminals of the unit (L or N) and the copper clad ground plane (GND), in the following sequence:

L (+4 kV) to GND, 5 times
L (-4 kV) to GND, 5 times
N (+4 kV) to GND, 5 times
N (-4 kV) to GND, 5 times
L, N (+4 kV) to GND, 5 times
L, N (-4 kV) to GND, 5 times



15 Revision History

| Date | Author | Revision | Description & changes |
|-------------|---------------|-----------------|---|
| | SL | 0.1 | First draft |
| 20-Jun-2001 | SL | 0.2 | Single layer, through hole design |
| 16-Jul-2001 | SL | 0.3 | Implemented design review comments Eliminated Y cap, added 2 shield |
| 31-Jul-2001 | SL | 0.4 | windings and output diode snubber. Updated transformer design, test data |
| 07-Aug-2001 | SL | 0.5 | and pictures. Updated EMI and thermal image. |
| 21-Nov-2002 | PV | 1.2 | Minor text changes |
| 05-Dec-2002 | IM | 1.3 | Updates after review |



Notes



For the latest updates, visit our Web site: www.powerint.com

The products and applications illustrated herein (including circuits external to the products and transformer construction) may be covered by one or more U.S. and foreign patents or potentially by pending U.S. and foreign patent applications assigned to Power Integrations. A complete list of Power Integrations' patents may be found at www.powerint.com.

Power Integrations reserves the right to make changes to its products at any time to improve reliability or manufacturability. Power Integrations does not assume any liability arising from the use of any device or circuit described herein, nor does it convey any license under its patent rights or the rights of others.

The PI Logo, **TOPSwitch**, **TinySwitch** and **EcoSmart** are registered trademarks of Power Integrations, Inc.
©Copyright 2002, Power Integrations, Inc.

WORLD HEADQUARTERS**NORTH AMERICA - WEST**

Power Integrations, Inc.
5245 Hellyer Avenue
San Jose, CA 95138 USA.
Main: +1-408-414-9200
Customer Service:
Phone: +1-408-414-9665
Fax: +1-408-414-9765
e-mail:
usasales@powerint.com

EUROPE & AFRICA

Power Integrations (Europe) Ltd.
Centennial Court
Easthampstead Road
Bracknell
Berkshire RG12 1YQ,
United Kingdom
Phone: +44-1344-462-300
Fax: +44-1344-311-732
e-mail:
eurosales@powerint.com

SINGAPORE

Power Integrations, Singapore
51 Goldhill Plaza #16-05
Republic of Singapore,
308900
Phone: +65-6358-2160
Fax: +65-6358-2015
e-mail:
singaporesales@powerint.com

TAIWAN

Power Integrations
International Holdings, Inc.
17F-3, No. 510
Chung Hsiao E. Rd.,
Sec. 5,
Taipei, Taiwan 110, R.O.C.
Phone: +886-2-2727-1221
Fax: +886-2-2727-1223
e-mail:
taiwansales@powerint.com

CHINA

Power Integrations
International Holdings, Inc.
Rm# 1705, Bao Hua Bldg.
1016 Hua Qiang Bei Lu
Shenzhen Guangdong,
518031
Phone: +86-755-8367-
5143
Fax: +86-755-8377-
9610
e-mail:
chinasales@powerint.com

KOREA

Power Integrations
International Holdings, Inc.
Rm# 402, Handuk Building,
649-4 Yeoksam-Dong,
Kangnam-Gu,
Seoul, Korea
Phone: +82-2-568-7520
Fax: +82-2-568-7474
e-mail: koreasales@powerint.com

JAPAN

Power Integrations, K.K.
Keihin-Tatemono 1st Bldg.
12-20 Shin-Yokohama
2-Chome,
Kohoku-ku, Yokohama-shi,
Kanagawa 222-0033, Japan
Phone: +81-45-471-1021
Fax: +81-45-471-3717
e-mail:
japansales@powerint.com

INDIA (Technical Support)

Innovatech
#1, 8th Main Road
Vasanthnagar
Bangalore, India 560052
Phone: +91-80-226-6023
Fax: +91-80-228-9727
e-mail:
indiasales@powerint.com

