



R1200– R5000

高压二极管
HIGH VOLTAGE DIODES

型号 TYPE	最大反向峰值电压 Maximum Peak Reverse Voltage	最大平均正向电流 Maximum Average Rectified Current @ Half-Wave Resistive Load 60Hz		最大正向浪涌电流 Maximum Forward Peak Surge Current @ 8.3ms Superimposed	最大反向漏电电流 Maximum Reverse Current @ PRV @ T _A =25°C	最大正向电压 Maximum Forward Voltage @ T _A =25°C		外型尺寸 Package Dimensions
	PRV	I _O @ T _L		I _{FM} (Surge)	I _R	I _{FM}	V _{FM}	
	V _{PK}	A _{AV}	°C	A _{PK}	μA _{dc}	A _{PK}	V _{PK}	
R1200 R1500 R1800 R2000	1200 1500 1800 2000	0.2	50	30	5.0	0.2	2.0	DO-41
R3000 R4000 R5000	3000 4000 5000	0.2	50	30	5.0	0.2	3.0 5.0 5.0	DO-15

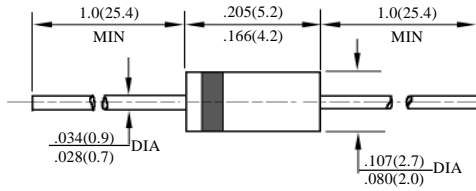

DO – 41

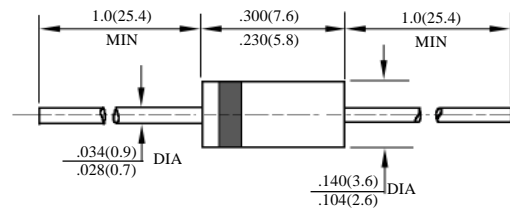

DO – 15