# 4V Drive Nch MOS FET RSS095N05

#### Structure

Silicon N-channel MOS FET

#### Features

- 1) Built-in G-S Protection Diode.
- 2) Small Surface Mount Package (SOP8).

### Applications

Power switching , DC / DC converter , Inverter

# Packaging dimensions

Package	Taping
Code	TB
Basic ordering unit(pieces)	2500

# ● Absolute maximum ratings (Ta=25°C)

Parameter	Symbol		Limits	Unit	
Drain-source voltage	$V_{DSS}$		45	V	
Gate-source voltage	$V_{GSS}$		20	V	
Drain current	Continuous	$I_D$		±9.5	Α
Diam current	Pulsed	$I_{DP}$	*1	±38	Α
Source current	Continuous	Is		1.6	Α
(Body diode)	Pulsed	$I_{SP}$	*1	38	Α
Total power dissipation	$P_{D}$	*2	2	W	
Chanel temperature	$T_{ch}$		150	°C	
Range of Storage temp	$T_{stg}$		-55 to +150	°C	


<sup>\*1</sup> PW≤10μs, Duty cycle≤1%

# ●Thermal resistance


Parameter	Symbol	Limits	Unit
Chanel to ambient	R <sub>th(ch-a)</sub> *	62.5	°C/W

<sup>\*</sup> Mounted on a ceramic board

## ●External dimensions (Unit : mm)



# ●Equivalent circuit



<sup>\*</sup> A protection diode is included between the gate and the source terminals to protect the diode against static electricity when the product is in use.Use a protection circuit when the fixed voltage are exceeded.

<sup>\*2</sup> Mounted on a ceramic board

# ●Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions
Gate-source leakage	Igss	-	_	10	μΑ	V <sub>GS</sub> =20V, V <sub>DS</sub> =0V
Drain-source breakdown voltage	$V_{(BR)\;DSS}$	45	_	_	V	I <sub>D</sub> = 1mA, V <sub>GS</sub> =0V
Zero gate voltage drain current	IDSS	_	_	1	μΑ	V <sub>DS</sub> = 45V, V <sub>GS</sub> =0V
Gate threshold voltage	V <sub>GS (th)</sub>	1.0	_	2.5	V	V <sub>DS</sub> = 10V, I <sub>D</sub> = 1mA
Static drain-source on-state resistance		_	11	16	mΩ	I <sub>D</sub> = 9.5A, V <sub>GS</sub> = 10V
	R <sub>DS (on)</sub> *	-	14	20	mΩ	I <sub>D</sub> = 9.5A, V <sub>GS</sub> = 4.5V
		-	15	21	mΩ	I <sub>D</sub> = 9.5A, V <sub>GS</sub> = 4V
Forward transfer admittance	Y <sub>fs</sub> *	10.0	_	_	S	V <sub>DS</sub> = 10V, I <sub>D</sub> = 9.5A
Input capacitance	Ciss	-	1830	_	pF	V <sub>DS</sub> = 10V
Output capacitance	Coss	_	410	_	pF	V <sub>GS</sub> =0V
Reverse transfer capacitance	Crss	-	210	_	pF	f=1MHz
Turn-on delay time	t <sub>d (on)</sub> *	-	20	_	ns	V <sub>DD</sub> ≒ 25V
Rise time	tr *	-	35	_	ns	ID= 5.0A
Turn-off delay time	td (off) *	-	78	_	ns	V <sub>GS</sub> = 10V R <sub>L</sub> =5Ω
Fall time	t <sub>f</sub> *	-	31	_	ns	R <sub>G</sub> =10Ω
Total gate charge	Qg *	_	18.9	26.5	nC	V <sub>DD</sub> =25V V <sub>GS</sub> =5V
Gate-source charge	Q <sub>gs</sub> *	_	4.9	_	nC	I <sub>D</sub> = 9.5A
Gate-drain charge	Q <sub>gd</sub> *	-	7.2	_	nC	R <sub>L</sub> =2.6Ω R <sub>G</sub> =10Ω

<sup>\*</sup>Pulsed

# Body diode characteristics (Source-Drain) (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions
Forward voltage	Vsp*	_	_	1.2	V	I <sub>S</sub> = 9.5A, V <sub>GS</sub> =0V

<sup>\*</sup>Pulsed

#### Electrical characteristic curves


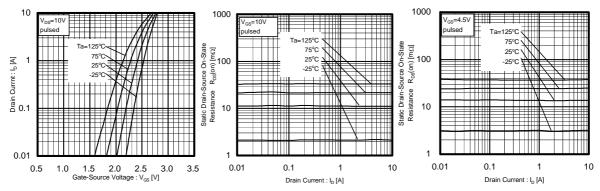


Fig.1 Typical Transfer Characteristics

Fig.2 Static Drain-Source On-State Resistance vs. Drain Current (1)

Fig.3 Static Drain-Source On-State Resistance vs. Drain Current (2)

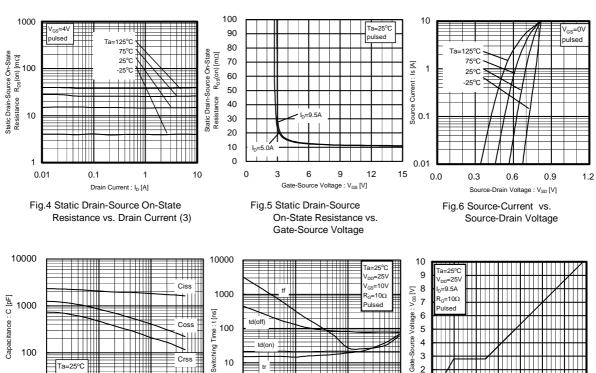

Capacitance : C [pF] 0001 Switching Time : t [ns] 10 f=1MHz 10 0.01 0.1 10 100 1 Drain-Source Voltage : V<sub>DS</sub> [V]

Fig.7 Typical capacitance vs. Source-Drain Voltage

Fig.8 Switching Characteristics

Fig.9 Dynamic Input Characteristics

10 15 20 25 Total Gate Charge : Qg [nC]

4 3

2

0

0

10

#### Measurement circuits




Fig.10 Switching Time Test Circuit




Fig.12 Gate Charge Test Circuit




Fig.11 Switching Time Waveforms




Fig.13 Gate Charge Waveform

#### Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any
  means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the
  product described in this document are for reference only. Upon actual use, therefore, please request
  that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard
  use and operation. Please pay careful attention to the peripheral conditions when designing circuits
  and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or
  otherwise dispose of the same, no express or implied right or license to practice or commercially
  exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

#### About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.

