

Tyco / Electronics
Raychem Circuit Protection
 308 Constitution Drive
 Menlo Park, CA 94025-1164
 Phone: 800-227-4856
 Fax: 800-227-4866

PolySwitch®
PTC Devices
 Overcurrent Protection Device

PRODUCT: miniSMDM160

DOCUMENT: SCD 24370
 PCN: 517929
 REV LETTER: B
 REV DATE: MARCH 28, 2002
 PAGE NO.: 1 OF 1


Specification Status: Released

Maximum Electrical Rating

Voltage: 8V_{DC}
Current: 40A

Notes:

1. All terminations are gold plated.
 Partial coverage of plating with solder may occur without effect on solderability or electrical performance
2. Devices cannot be wave soldered.
3. Drawing not to scale

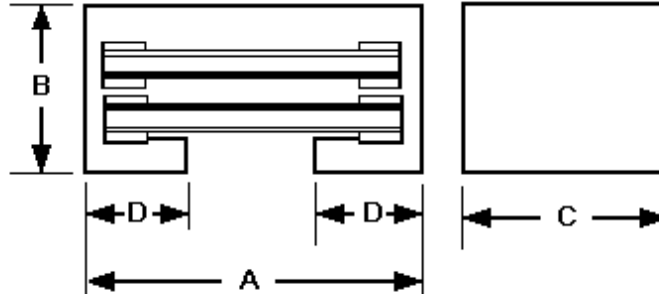

Marking:

- ⊗ — Manufacturer's Mark
- 160 — Part Identification
- — Lot Identification

TABLE I. DIMENSIONS:

| | A | | B | | C | | D | |
|------|---------|---------|---------|---------|---------|---------|---------|---------|
| | MIN | MAX | MIN | MIN | MAX | MAX | MIN | MAX |
| mm: | 4.35 | 4.75 | 1.75 | 2.00 | 3.05 | 3.60 | 1.4 | 1.7 |
| in.* | (0.172) | (0.187) | (0.069) | (0.079) | (0.120) | (0.142) | (0.055) | (0.067) |

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

| CURRENT RATINGS ** | | | | | | TIME TO TRIP ** | RESISTANCE VALUES | | TRIPPED-STATE POWER DISSIPATION** |
|--------------------|------|-----------------|------|-----------------|------|-----------------------|-------------------|-------|-----------------------------------|
| AMPERES AT 0°C | | AMPERES AT 25°C | | AMPERES AT 60°C | | SECONDS AT 25°C, 8.0A | OHMS AT 25°C | | WATTS AT 25°C, 8.0V |
| HOLD | TRIP | HOLD | TRIP | HOLD | TRIP | MAX | MIN | MAX* | MAX |
| 1.80 | 3.15 | 1.60 | 2.80 | 1.14 | 2.00 | 2.0 | 0.033 | 0.099 | 0.8 |

*Maximum resistance is measured 1 hour after reflow.

** Values specified were determined using PCB's with 0.030"X1.5 ounce copper traces.

Reference Documents: PS300
 Precedence: This specification takes precedence over documents referenced herein.
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.