

# MA2X073

Silicon epitaxial planar type

For band switching


## ■ Features

- Low forward dynamic resistance  $r_f$
- Less voltage dependence of diode capacitance  $C_D$
- Mini type package, allowing downsizing of equipment and automatic insertion through the taping package

## ■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Reverse voltage (DC)	$V_R$	35	V
Forward current (DC)	$I_F$	100	mA
Operating ambient temperature*	$T_{opr}$	-25 to +85	°C
Storage temperature	$T_{stg}$	-55 to +150	°C

Note) \* : Maximum ambient temperature during operation

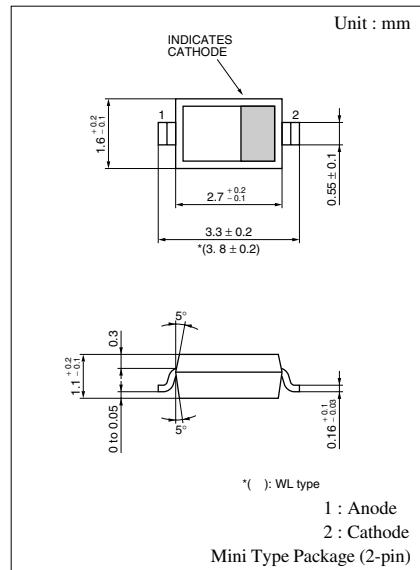

Marking Symbol: 4B

## ■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse current (DC)	$I_R$	$V_R = 33 \text{ V}$		0.01	100	nA
Forward voltage (DC)	$V_F$	$I_F = 100 \text{ mA}$		0.92	1	V
Diode capacitance	$C_D$	$V_R = 6 \text{ V}, f = 1 \text{ MHz}$		0.9	1.2	pF
Forward dynamic resistance*	$r_f$	$I_F = 2 \text{ mA}, f = 100 \text{ MHz}$		0.65	0.85	Ω

Note) 1. Rated input/output frequency: 100 MHz

2. \*:  $r_f$  measuring instrument: YHP MODEL 4191A RF IMPEDANCE ANALYZER

