

AP15T03GH/J

Pb Free Plating Product



**Advanced Power
Electronics Corp.**


N-CHANNEL ENHANCEMENT MODE

POWER MOSFET

▼ Lower Gate Charge

▼ Simple Drive Requirement



▼ Fast Switching Characteristic

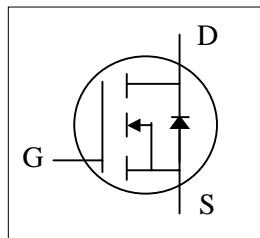

BV_{DSS}	30V
$R_{DS(ON)}$	80mΩ
I_D	12A

Description

The TO-252 package is universally preferred for all commercial-industrial surface mount applications and suited for low voltage applications such as DC/DC converters. The through-hole version (AP15T03GJ) is available for low-profile applications.

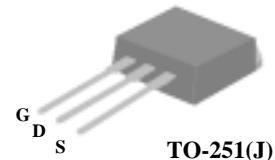

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	30	V
V_{GS}	Gate-Source Voltage	± 20	V
$I_D @ T_c = 25^\circ C$	Continuous Drain Current	12	A
$I_D @ T_c = 100^\circ C$	Continuous Drain Current	6.4	A
I_{DM}	Pulsed Drain Current ¹	50	A
$P_D @ T_c = 25^\circ C$	Total Power Dissipation	12.5	W
	Linear Derating Factor	0.1	W/°C
T_{STG}	Storage Temperature Range	-55 to 150	°C
T_J	Operating Junction Temperature Range	-55 to 150	°C

Thermal Data

Symbol	Parameter	Value	Units
R_{thj-c}	Thermal Resistance Junction-case	Max.	10 °C/W
R_{thj-a}	Thermal Resistance Junction-ambient	Max.	110 °C/W



Electrical Characteristics @ $T_j=25^\circ\text{C}$ (unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=250\mu\text{A}$	30	-	-	V
$\Delta \text{BV}_{\text{DSS}}/\Delta T_j$	Breakdown Voltage Temperature Coefficient	Reference to 25°C , $I_{\text{D}}=1\text{mA}$	-	0.02	-	$\text{V}/^\circ\text{C}$
$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance ²	$V_{\text{GS}}=10\text{V}, I_{\text{D}}=8\text{A}$	-	-	80	$\text{m}\Omega$
		$V_{\text{GS}}=4.5\text{V}, I_{\text{D}}=5\text{A}$	-	-	100	$\text{m}\Omega$
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=250\mu\text{A}$	1	-	3	V
g_{fs}	Forward Transconductance	$V_{\text{DS}}=10\text{V}, I_{\text{D}}=8\text{A}$	-	7	-	S
I_{DSS}	Drain-Source Leakage Current ($T_j=25^\circ\text{C}$)	$V_{\text{DS}}=30\text{V}, V_{\text{GS}}=0\text{V}$	-	-	1	uA
	Drain-Source Leakage Current ($T_j=150^\circ\text{C}$)	$V_{\text{DS}}=24\text{V}, V_{\text{GS}}=0\text{V}$	-	-	25	uA
I_{GSS}	Gate-Source Leakage	$V_{\text{GS}}=\pm 20\text{V}$	-	-	± 100	nA
Q_g	Total Gate Charge ²	$I_{\text{D}}=8\text{A}$	-	4	7	nC
Q_{gs}	Gate-Source Charge	$V_{\text{DS}}=24\text{V}$	-	1.4	-	nC
Q_{gd}	Gate-Drain ("Miller") Charge	$V_{\text{GS}}=4.5\text{V}$	-	2.4	-	nC
$t_{\text{d(on)}}$	Turn-on Delay Time ²	$V_{\text{DS}}=15\text{V}$	-	6	-	ns
t_r	Rise Time	$I_{\text{D}}=8\text{A}$	-	22	-	ns
$t_{\text{d(off)}}$	Turn-off Delay Time	$R_G=3.3\Omega, V_{\text{GS}}=10\text{V}$	-	11	-	ns
t_f	Fall Time	$R_D=1.88\Omega$	-	2.4	-	ns
C_{iss}	Input Capacitance	$V_{\text{GS}}=0\text{V}$	-	280	450	pF
C_{oss}	Output Capacitance	$V_{\text{DS}}=25\text{V}$	-	70	-	pF
C_{rss}	Reverse Transfer Capacitance	$f=1.0\text{MHz}$	-	47	-	pF
R_g	Gate Resistance	$f=1.0\text{MHz}$	-	1.1	-	Ω

Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
V_{SD}	Forward On Voltage ²	$I_{\text{S}}=8\text{A}, V_{\text{GS}}=0\text{V}$	-	-	1.3	V
t_{rr}	Reverse Recovery Time ²	$I_{\text{S}}=8\text{A}, V_{\text{GS}}=0\text{V},$ $dI/dt=100\text{A}/\mu\text{s}$	-	17	-	ns
Q_{rr}	Reverse Recovery Charge	$dI/dt=100\text{A}/\mu\text{s}$	-	7	-	nC

Notes:

1. Pulse width limited by safe operating area.

2. Pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.

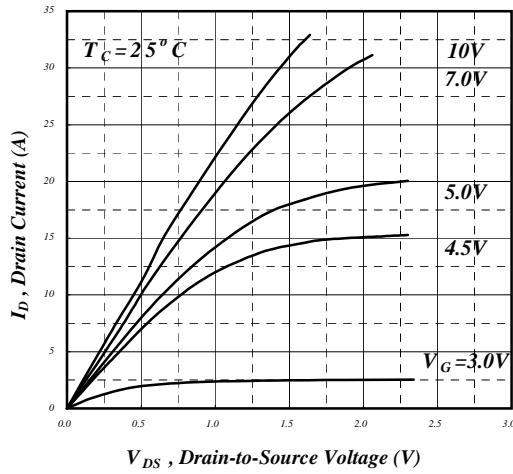


Fig 1. Typical Output Characteristics

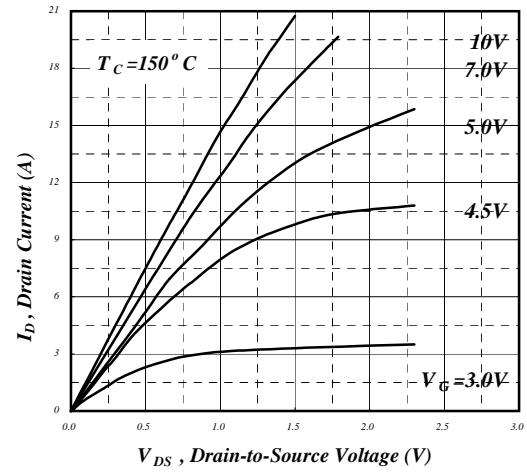


Fig 2. Typical Output Characteristics

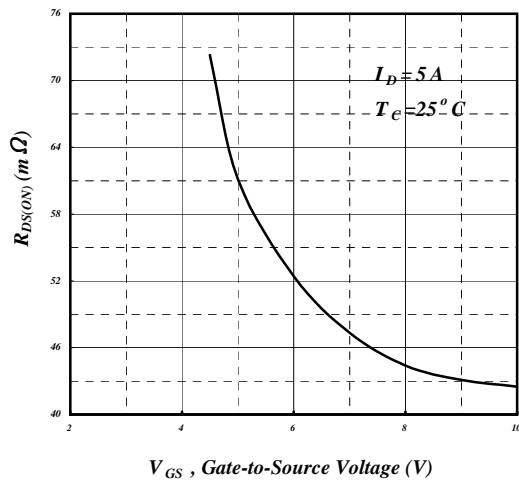


Fig 3. On-Resistance v.s. Gate Voltage

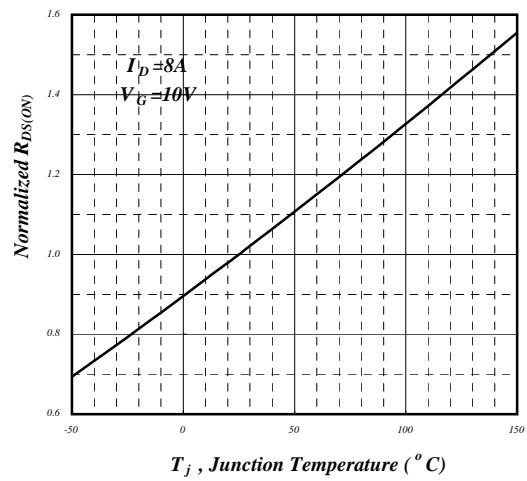


Fig 4. Normalized On-Resistance v.s. Junction Temperature

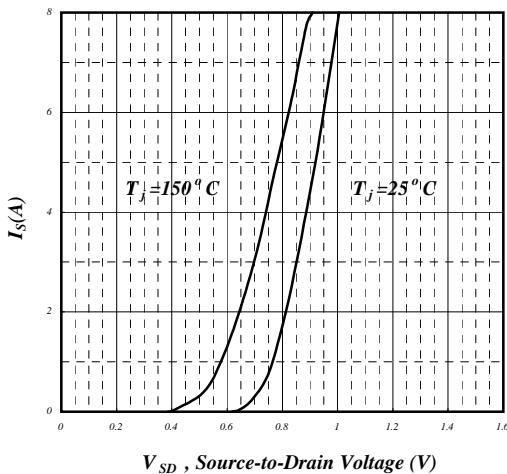


Fig 5. Forward Characteristic of Reverse Diode

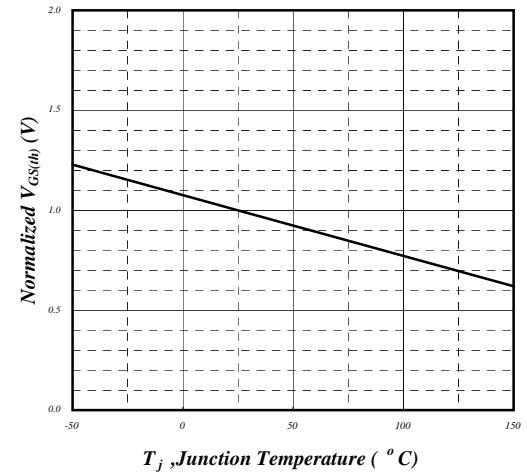


Fig 6. Gate Threshold Voltage v.s. Junction Temperature

AP15T03GH/J

