


**2mm**  
**Prism® CBI® Circuit Board Indicator**  
**Surface Mount LED**

**Dialight**

**595-2x01-0xx**

**1**

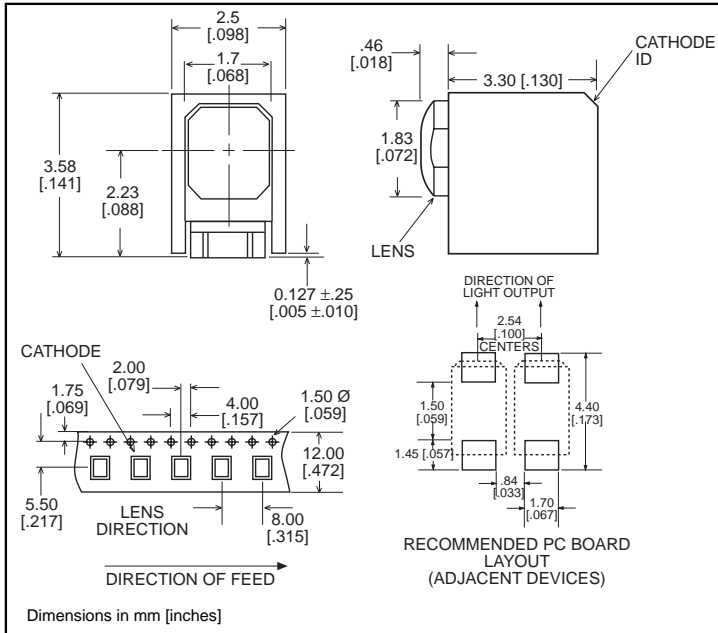

U.S. Patent RE 34,254; foreign patents pending

**Part Number\***

**Type**

595-2101-0xx

AlGaAs  
Red

**NEW**

595-2201-0xx

High Intensity  
Green

595-2301-0xx

High Performance  
Green

595-2401-0xx

High Performance  
Yellow

**NEW**

595-2701-0xx

AllnGaP  
Yellow

**Features**

- Helps to eliminate mixed technology PC boards.
- Unique patented low part count design.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase solder processes.
- Packaged on 12mm tape, 7" or 13" reels per EIA-481-1.
- Black housing enhances contrast ratio.
- 2 mm LED size saves space, allows .100" spacing.
- Housing material meets UL94V-0 flammability rating.
- Lens material meets UL94-HB flammability rating.
- Uses LEDs designed specifically for surface mounting.

<b>* ORDERING INFORMATION</b>	
<b>595-2x01-0xx</b>	
packaging option	
02	20 pieces on tape
07	7" reel, 600 pcs/reel
13	13" reel, 2300 pcs/reel

## Absolute Maximum Ratings (T<sub>A</sub>=25°C)

Parameter	-2101	-2201	-2301	-2401	-2701
Color*	21	22	23	24	27
Power Dissipation (derate linearly from 25°C mA/°C)	60mA .42	75mA .42	75mA .42	75mA .42	75mA .42
Forward DC Current	30mA	30mA	30mA	30mA	30mA
Peak Forward Current (10μ sec)	70mA	70mA	70mA	70mA	70mA
Operating Temperature	-30°C to +85°C				
Storage Temperature	-30°C to +80°C				
Soldering Temperatures Convection IR Vapor Phase	260° Peak, above 120° for 2 min., 215°C for 3 Min.				

Solder Adherence per MIL-STD-202E, Method 208C

\*LED colors: 21) AlGaAs Red 22) High Intensity Green, 23) High Performance Green, 24) High Performance Yellow, 27) AlInGaP Yellow

## Operating Characteristics (T<sub>A</sub> = 25°C)

Parameter	Part No.	Color*	Min	Typ	Max	Units	Test Cond.
Forward Voltage V <sub>F</sub>	-2101	21		1.7	2	V	I <sub>F</sub> =20 mA
	-2201	22		2.1	2.5		
	-2301	23		2.1	2.5		
	-2401	24		2.2	2.5		
	-2701	27		2.2	2.5		
Reverse Voltage V <sub>R</sub>	-2101	21	4		5	V	I <sub>R</sub> = 100 μA
	-2201	22					
	-2301	23	4				
	-2401	24	4				
	-2701	27					
Peak Wavelength λ Dom	-2101	21		660		nm	
	-2201	22		560			
	-2301	23		560			
	-2401	24		580			
	-2701	27		580			
Luminous Intensity I <sub>V</sub>	-2101	21		25		mcd	I <sub>F</sub> = 20 mA
	-2201	22		11			
	-2301	23		11			
	-2401	24		9			
	-2701	27		9			
Viewing Angle (2θ 1/2)	-2101	21		40		deg.	
	-2201	22		40			
	-2301	23		40			
	-2401	24		40			
	-2701	27		40			

θ 1/2 is the off axis angle at which the luminous intensity is half the axial luminous intensity

\*LED colors: 21) AlGaAs Red 22) High Intensity Green, 23) High Performance Green, 24) High Performance Yellow, 27) AlInGaP Yellow

