

Features

- DC to 4 GHz
- Flanged model
- Low VSWR

Applications

- High power RF transmission

CHF5225CAF Series 20 W Power RF Flanged Chip Termination


General Specifications

Substrate.....Alumina
 Resistive Film.....Thick Film
 Tab.....Ag
 Protection.....Epoxy
 Tab Attachment
Braze with Epoxy Encapsulation
 Mounting FlangeCu plated with Ni
 Resistance.....50 Ω
 Tolerance.....±5 %
 Packaging.....100 pcs./tray


Absolute Ratings

Power.....20 W
 Frequency4.0 GHz
 VSWR.....1.2 Maximum

Characteristic Curve

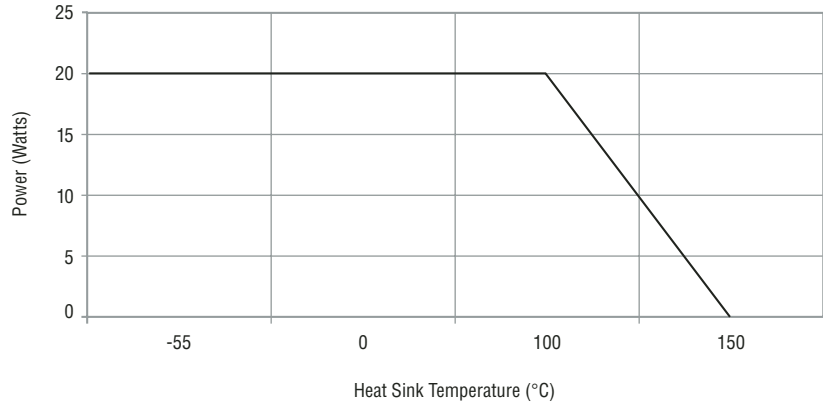

Product Dimensions

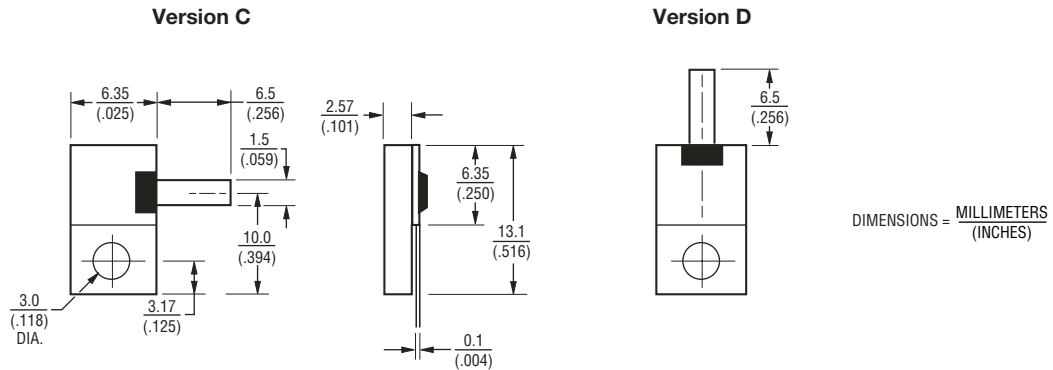

How To Order

CHF 5225 C A F 500 L

Model _____
 Size _____
 Version _____
 Substrate _____
 Mount _____
 F = Flange
 Value _____
 500 = 50 Ohm
 Function _____
 L = Termination



Reliable Electronic Solutions

Asia-Pacific:

Tel: +886-2 2562-4117
 Fax: +886-2 2562-4116

Europe:

Tel: +41-41 768 5555
 Fax: +41-41 768 5510

The Americas:

Tel: +1-951 781-5500
 Fax: +1-951 781-5700

www.bourns.com