


**ENERGIZER NO. CRV3 (ELCRV3)**



Typical Dimensions in mm (inches)

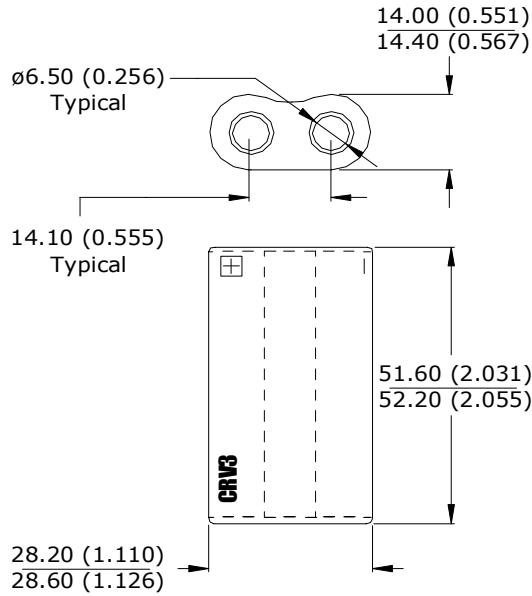

This battery Contains a Positive Temperature Coefficient (PTC) Device to Limit Current Flow

Simulated Application Test  
Estimated Service at 21°C (70°F)

Schedule:	Typical Constant Current Drains at 2.6V	Cutoff Voltage 2.0V
Continuous Discharge	200 mA	14.7 Hours
Continuous Discharge	1000 mA	2.7 Hours

Schedule:	Typical Constant Power Drains at 2.6V	Cutoff Voltage 2.0V
Continuous Discharge	1000 mW	7.6 Hours
Continuous Discharge	2000 mW	3.4 Hours

**Chemical System:** Lithium/Iron Disulfide (Li/FeS<sub>2</sub>)

**Designation:** Not Issued Yet  
**Battery Voltage:** 3.0 Volts  
**Typical Weight:** 32 grams (1.1 oz.)  
**Typical Volume:** 24 cubic centimeters (1.5 cubic inch)  
**Average Capacity:** 2900 mAh to 2.0 volts

(Rated Capacity at 200 mA at 21°C)

**Storage Temp:** -40°C to 60°C (-40°F to 140°F)


**Operating Temp:** -40°C to 60°C (-40°F to 140°F)

**Max Discharge:** 2 Amps Continuous  
3 Amps Pulse (2 seconds max)


**Cells:** Two-15LF in series

**Jacket:** Non-magnetic Plastic Label

Typical Constant Current @21°C  
Continuous Discharge Characteristics

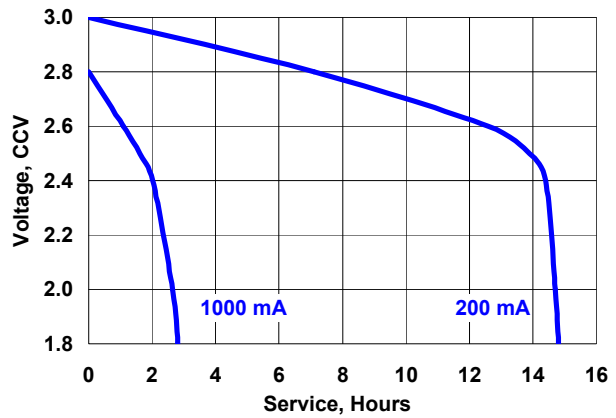

Typical Constant Power @21°C  
Continuous Discharge Characteristics

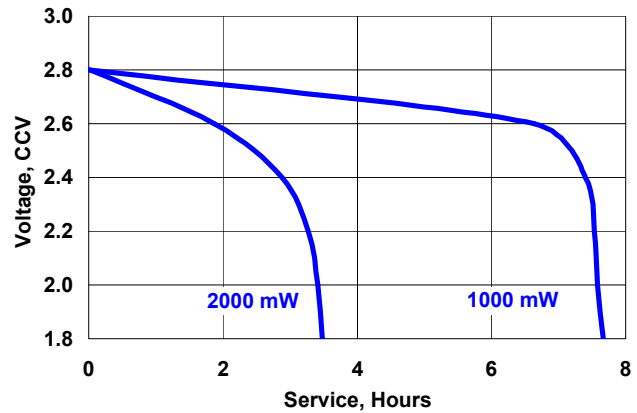

**Important Notice**

This data sheet contains information specific to batteries manufactured at the time of its publication.

**Contents herein do not constitute a warranty.**

Copyright © Eveready Battery Co. Inc. - All Rights Reserved