

1. General Description

The MDT75C272 is an OTP Encoder using CMOS technology. It has a maximum of 20 bits addressing code providing up to one million codes. It can reduce any code collision and unauthorized code scanning possibilities.

2. Features

- CMOS technology.
- Low standby current : 1.0 uA.
- Wide range of Operating Voltage : Vdd = 3.0V ~ 12V.
- Up to 4 data pins.
- Total 1048576 address codes.
- Built-in RC oscillator with single external resistor.
- Available in DIP and SOP package.
- Automatically enter sleep mode if press button over 6 ~ 10 sec

3. Pin Assignment

MDT75C272P / 75C272S

8 pin DIP / SOP

OSCR	1	8	K3
Vdd	2	7	K2
Vss	3	6	K1
TXD	4	5	K0


4. Pin Function Description

Symbol	I/O	Function Description
OSCR	I	Connect a resistor to Vdd to adjust internal RC freq.
Vdd		Positive power supply 3.0V ~ 12 V.
Vss		Ground.
TXD	O	Data output pin.
K0	I	Data input with pull low Resistor.
K1	I	Data input with pull low Resistor.
K2	I	Data input with pull low Resistor.
K3	I	Data input with pull low Resistor.

5. Output Data Reporting

Output data frame

Preamble	C0 ~ C19 (1048576 address codes)	D0	D1	D2	D3
-----------------	---	-----------	-----------	-----------	-----------

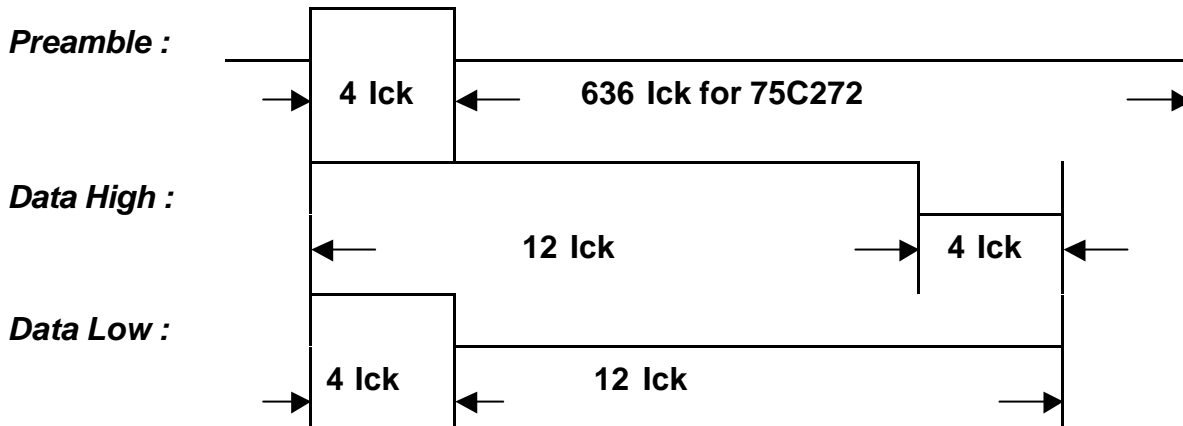

Note : 1 lck = 8 OSC clocks

6. Key 0 ~ 3 combination table

K3	K2	K1	K0	D3	D2	D1	D0
0	0	0	1	0	0	0	1
0	0	1	0	0	0	1	0
0	0	1	1	0	0	1	1
0	1	0	0	0	1	0	0
0	1	0	1	0	1	0	1
0	1	1	0	0	1	1	0
0	1	1	1	0	1	1	1
1	0	0	0	1	0	0	0
1	0	0	1	1	0	0	1
1	0	1	0	1	0	1	0
1	0	1	1	1	0	1	1
1	1	0	0	1	1	0	0
1	1	0	1	1	1	0	1
1	1	1	0	1	1	1	0
1	1	1	1	1	1	1	1


7. Absolute Maximum Rating

Symbol	Parameter	Conditions	Rating	Unit
Vdd	Supply Voltage		-0.3 ~ 13	V
Vi	Input Voltage		-0.3 ~ Vdd+0.3	V
Vo	Output Voltage		-0.3 ~ Vdd+0.3	V
Tst	Storage Temp.		-40 ~ 125	
Top	Operating Temp.		-20 ~ 70	
Pdis	Max. Power dissipation	Vdd = 12V	300	mW

8. DC Electrical Characteristics (T_A=0 to 70)

Symbol	Parameters	Conditions	Min.	Typ.	Max.	Unit
Vdd	Operating Voltage		3.0	5	12	V
I _{sb}	Stand by current	Vdd = 12V, OSC stop K0 ~ K3 = Low Output Unloaded		1.0	3.0	uA
I _{op}	Operating current	Vdd =12V		0.5	1.0	mA
I _{oh}	Source current	Vdd =12V, Voh = 6V	4.5			mA
I _{ol}	Sink Current	Vdd =12V, Vol = 6V	4.5			mA
F _{op}	Operating Freq	Vdd=11V, Rosc=360K ~ 470K ohm		80K		HZ

9. Application circuit

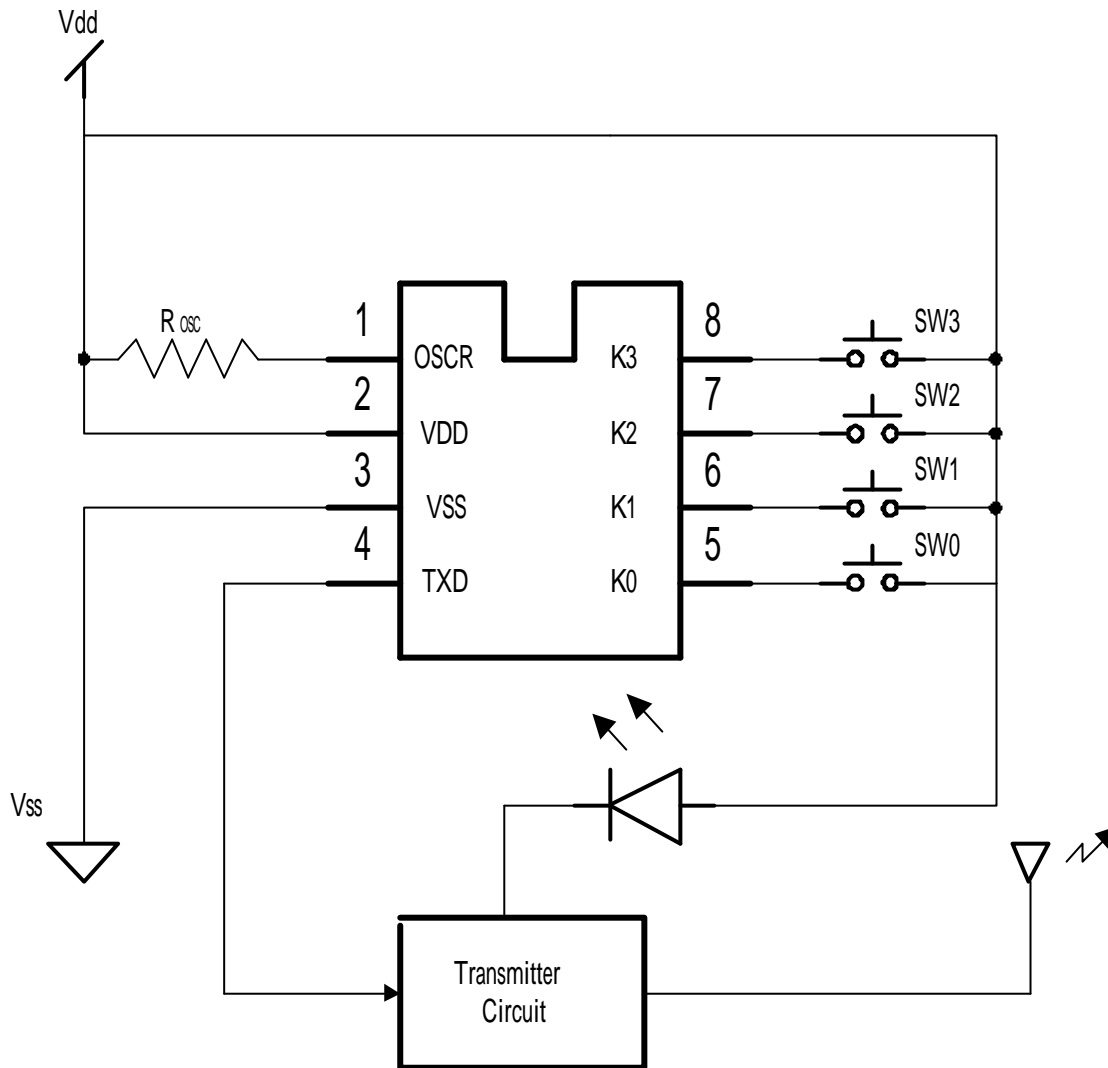

10. External oscillator resistor selection table (Vdd=11V)

Rosc (ohm)	Freq. (Hz)	Operating Current
510 K	70.0 K	443 μ A
470 K	74.0 K	444 μ A
430 K	78.7 K	445 μ A
390 K	84.6 K	447 μ A
360 K	88.9 K	449 μ A
330 K	97.4 K	451 μ A

