



## MAC97A6/8

TRIACS

### LOGIC LEVEL TRIAC

#### DESCRIPTION

Logic level sensitive gate triac intended to be interfaced directly to microcontrollers, logic integrated circuits and other low power gate trigger circuits.



#### FEATURES

- \*Blocking voltage to 600 V (MAC97A8)
- \*RMS on-state current to 0.6 A
- \*Sensitive gate in all four quadrants

#### APPLICATIONS

- \*General purpose bidirectional switching
- \*Phase control applications
- \*Solid state relays.

#### SYMBOL

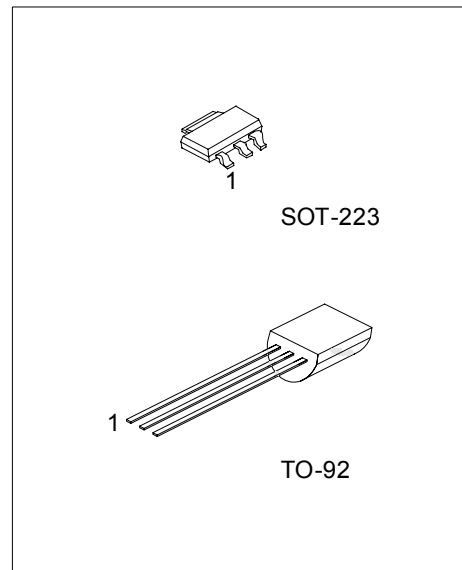

\*Pb-free plating product number:  
MAC97A6L/MAC97A8L

#### ORDERING INFORMATION

Order Number		Package	Pin Assignment			Packing
Normal	Lead Free Plating		1	2	3	
MAC97A6-AA3-R	MAC97A6L-AA3-R	SOT-223	MT1	MT2	Gate	Tape Box
MAC97A6-T92-B	MAC97A6L-T92-B	TO-92	MT1	Gate	MT2	Tape Box
MAC97A6-T92-K	MAC97A6L-T92-K	TO-92	MT1	Gate	MT2	Bulk
MAC97A6-T92-R	MAC97A6L-T92-R	TO-92	MT1	Gate	MT2	Tape Reel
MAC97A8-AA3-R	MAC97A8L-AA3-R	SOT-223	MT1	MT2	Gate	Tape Box
MAC97A8-T92-B	MAC97A8L-T92-B	TO-92	MT1	Gate	MT2	Tape Box
MAC97A8-T92-K	MAC97A8L-T92-K	TO-92	MT1	Gate	MT2	Bulk
MAC97A8-T92-R	MAC97A8L-T92-R	TO-92	MT1	Gate	MT2	Tape Reel

<p>MAC97A6L-AA3-R</p> <p>(1)Packing Type</p> <p>(2)Package Type</p> <p>(3)Lead Plating</p>	<p>(1) B: Tape Box, K: Bulk, R: Tape Reel</p> <p>(2) AA3: SOT-223, T92: TO-92</p> <p>(3) L: Lead Free Plating, Blank: Pb/Sn</p>
--	---

## ■ ABSOLUTE MAXIMUM RATINGS

CHARACTERISTIC		SYMBOL	RATINGS	UNIT
Repetitive Peak off-State Voltage ( $T_J=25 \sim 125$ )	MAC97A6	$V_{DRM}$	400	V
	MAC97A8		600	V
RMS on-State Current (Full Sine Wave, $T_{LEAD} \leq 50$ )		$I_{T(RMS)}$	0.6	A
Non-Repetitive Peak on-State Current (Full Sine Wave, $T_J=25$ Prior to Surge)	$t=20ms$	$I_{TSM}$	8.0	A
	$t=16.7ms$		8.8	A
$I^2t$ for Fusing ( $t=10ms$ )		$I^2t$	0.32	$A^2s$
Repetitive Rate of Rise of on-State Current After Triggering ( $I_{TM}=1.0A$ , $I_G=0.2A$ , $dI_G/dt=0.2A/\mu s$ )	T2+G+	$dI_T/dt$	50	$A/\mu s$
	T2+G-		50	$A/\mu s$
	T2-G-		50	$A/\mu s$
	T2-G+		10	$A/\mu s$
Peak Gate Voltage [ $t=2\mu s$ (max) ]		$V_{GM}$	5	V
Peak Gate Current [ $t=2\mu s$ (max) ]		$I_{GM}$	1	A
Peak Gate Power [ $t=2\mu s$ (max) ]		$P_{GM}$	5	W
Average Gate Power [ $T_{case}=80$ , $t=2\mu s$ (max) ]		$P_{G(AV)}$	0.1	W
Operating Junction Temperature		$T_J$	-40~+125	
Storage Temperature		$T_{STG}$	-40~+150	

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

## ■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Thermal Resistance Junction to Ambient	TO-92	$\theta_{JA}$	150	/W
	SOT-223		165	/W

## ■ STATIC CHARACTERISTICS ( $T_J=25$ , unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Gate Trigger Current	$I_{GT}$	$V_D=12V$ , $I_T=0.1A$	T2+G+	1	5	mA
			T2+G-	2	5	mA
			T2-G-	2	5	mA
			T2-G+	4	7	mA
Latching Current	$I_L$	$V_D=12V$ , $I_{GT}=0.1A$	T2+G+	1	10	mA
			T2+G-	5	10	mA
			T2-G-	1	10	mA
			T2-G+	2	10	mA
Holding Current	$I_H$	$V_D=12V$ , $I_{GT}=0.1A$		1	10	mA
On-State Voltage	$V_T$	$I_T=0.85A$		1.4	1.9	V
Gate Trigger Voltage	$V_{GT}$	$V_D=12V$ , $I_T=0.1A$		0.9	2	V
		$V_D=V_{DRM}$ , $I_T=0.1A$ , $T_J=110$	0.1	0.7		V
Off-State Leakage Current	$I_D$	$V_D=V_{DRM(MAX)}$ , $T_J=110$		3	100	$\mu A$

## ■ DYNAMIC CHARACTERISTICS ( $T_J=25$ , unless otherwise specified)


PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Critical Rate of Rise of Off-State Voltage	$dV_D/dt$	$V_D=67\%$ of $V_{DRM(max)}$ , $T_{case}=110$ , Exponential Waveform, Gate Open Circuit	30	45		$V/\mu s$
Critical Rate of Rise of Commutation Voltage	$dV_{com}/dt$	$V_D=Rated V_{DRM}$ , $T_{case}=50$ , $I_{TM}=0.84A$ , commutating $dI/dt=0.3A/ms$		5		$V/\mu s$
Gate Controlled Turn-On Time	$t_{gt}$	$I_{TM}=1.0A$ , $V_D=V_{DRM(max)}$ , $I_G=25mA$ , $dI_G/dt=5A/\mu s$		2		$\mu s$

## TYPICAL CHARACTERISTICS


Transient Thermal Impedance From Junction to Ambient as a Function of Pulse Duration.

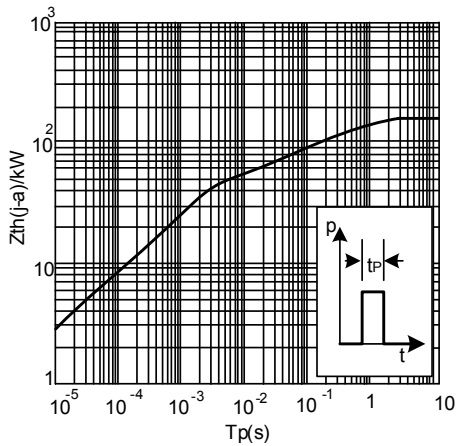


Maximum On-State Dissipation as a Function of RMS On-State Current; Typical Values. =Conduction Angle.

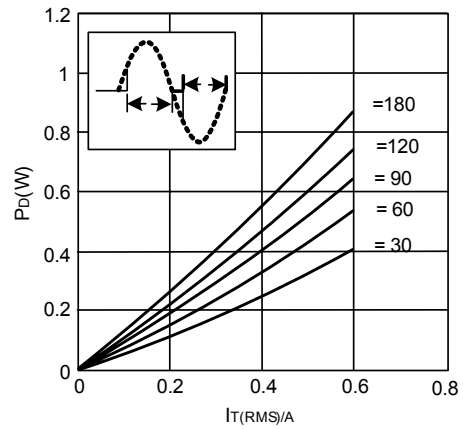


Maximum Permissible Non-Repetitive Peak on-State Current as a Function of Pulse Width for Sinusoidal Currents; Typical Values. tp = 20ms.

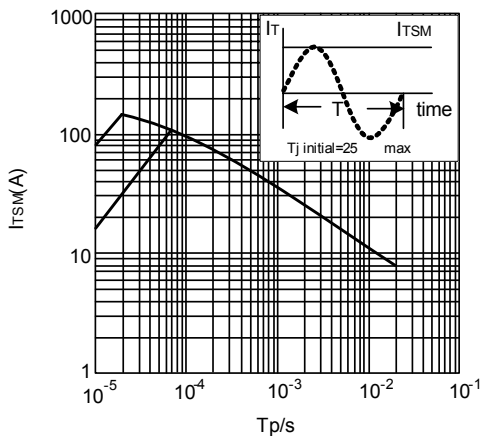


Maximum Permissible Non-Repetitive Peak On-State Current as a Function of Number of Cycles for Sinusoidal Currents; Typical Values. n=Number of Cycles at f=50Hz.

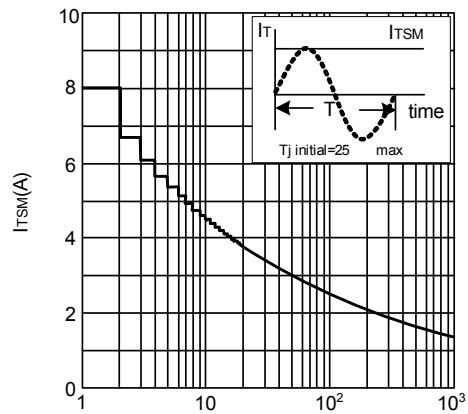

Maximum Permissible RMS Current as a Function of Lead Temperature Typical Values.

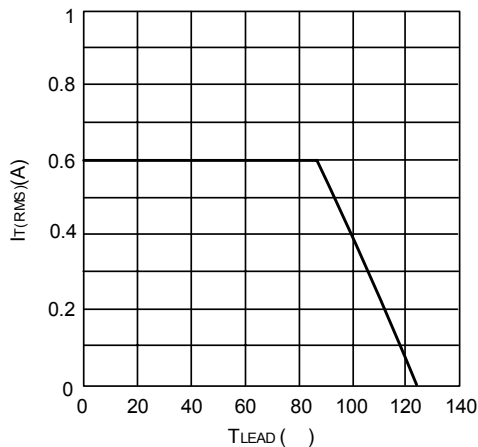


Maximum Permissible Repetitive RMS On-State Current as a Function of Surge Duration for Sinusoidal Currents; Typical Values. f=50Hz; TLEAD = 50.

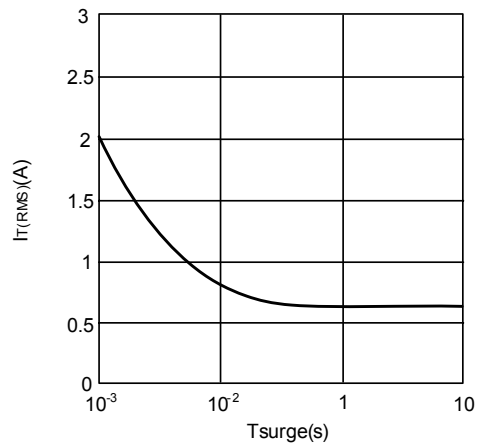


## ■ TYPICAL CHARACTERISTICS(Cont.)


Normalized Gate Trigger Voltage as a Function of Junction Temperature; Typical Values.

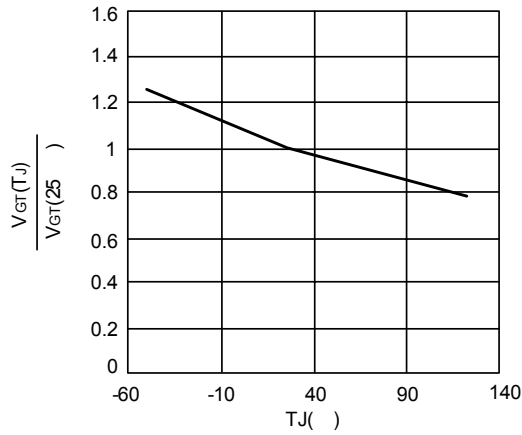


Normalized Gate Trigger Current as a Function of Junction Temperature; Typical Values.

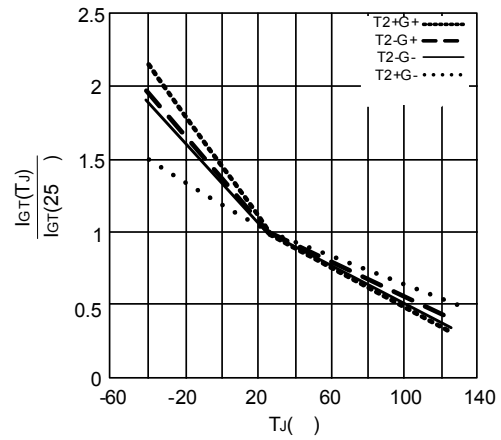


Normalized Latching Current as a Function of Junction Temperature; Typical Values.

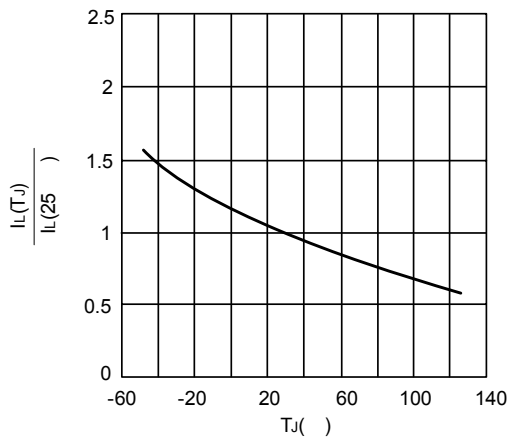


Normalized Holding Current as a Function of Junction Temperature; Typical Values.

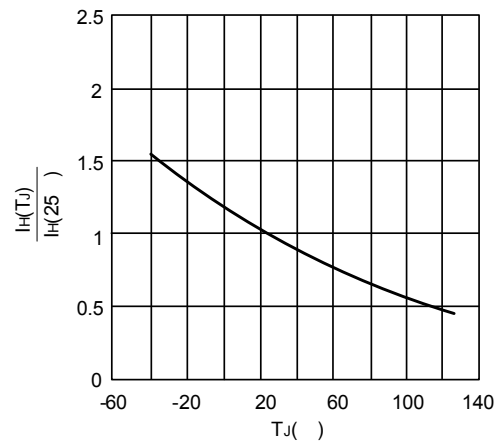

On-State Current as a Function of On-State Voltage; Typical and Maximum Values.

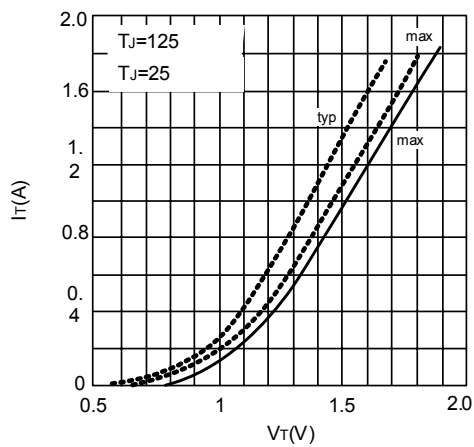

Critical Rate of Rise of Off-State Voltage as a Function of Junction Temperature; Typical Values.

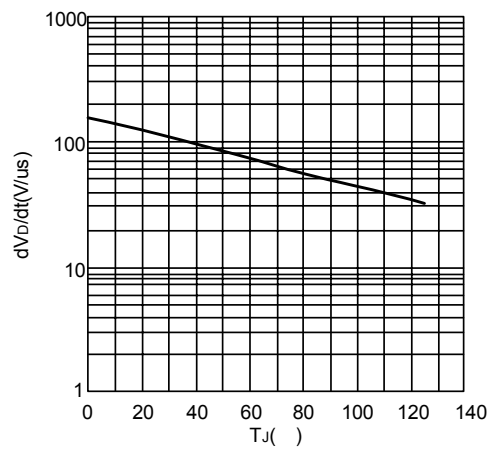

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.