

2SK766

Silicon N-channel Power F-MOS FET


■ Features

- Low ON resistance $R_{DS(on)}$: $R_{DS(on)} = 2.4\Omega$ (typ.)
- High switching rate : $t_s = 35\text{ns}$ (typ.)
- No secondary breakdown
- High breakdown voltage

■ Application

- No contact relay
- Solenoid drive
- Motor drive
- Control equipment
- Switching power source

■ Package Dimensions

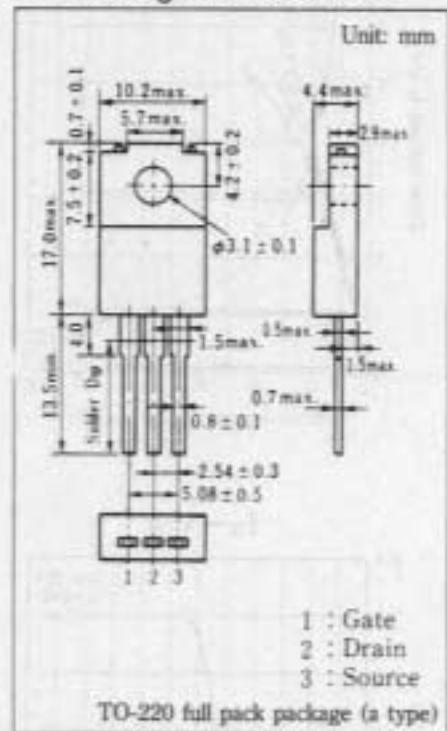

■ Absolute Maximum Ratings ($T_c=25^\circ\text{C}$)

Item	Symbol	Value	Unit
Drain-source voltage	V_{DSS}	500	V
Gate-source voltage	V_{GSS}	± 20	V
Drain current	DC I_D	3	A
	Peak-to-pulse I_{DPK}	6	
Power dissipation	$T_c = 25^\circ\text{C}$ P_D	40	W
	$T_a = 25^\circ\text{C}$	2.0	
Channel temperature	T_{ch}	150	°C
Storage temperature	T_{stg}	-55 ~ +150	°C

■ Electrical Characteristics ($T_c=25^\circ\text{C}$)

Item	Symbol	Condition	min.	typ.	max.	Unit
Drain current	I_{DSS}	$V_{DS} = 400\text{V}, V_{GS} = 0$			0.1	mA
Gate-source current	I_{GSS}	$V_{GS} = \pm 20\text{V}, V_{DS} = 0$			± 1	μA
Drain-source voltage	V_{DSS}	$I_D = 1\text{mA}, V_{GS} = 0$	500			V
Gate threshold voltage	V_{th}	$V_{DS} = 25\text{V}, I_D = 1\text{mA}$	1		5	V
Drain-source ON resistance	$R_{DS(on)}$	$V_{GS} = 10\text{V}, I_D = 2\text{A}$		2.4	3.6	Ω
Forward transfer admittance	$ Y_{fs} $	$V_{DS} = 25\text{V}, I_D = 2\text{A}$	1.2	2.0		S
Input capacitance	C_{iss}	$V_{DS} = 20\text{V}, V_{GS} = 0, f = 1\text{MHz}$		315		pF
Output capacitance	C_{oss}			65		pF
Reverse transfer capacitance	C_{rss}			30		pF
Turn-on time	t_{on}	$V_{GS} = 10\text{V}, I_D = 2\text{A}$		30		ns
Fall time	t_f			35		ns
Delay time	$t_d(\text{off})$			55		ns