


PBA150F

Ordering information

PBA 150 **F** -5 -O

1 2 3 4 5

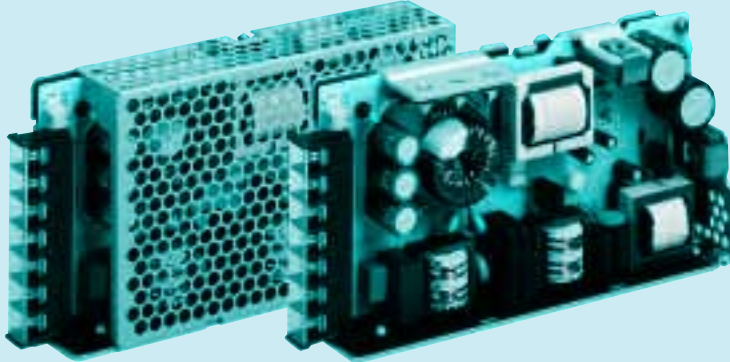

- 1 Series name
- 2 Output wattage
- 3 Universal input
- 4 Output voltage
- 5 Optional
 - C :with Coating
 - G :Low leakage current (0.15mA max / ACIN 240V)
 - E :Low leakage current and EMI class A (0.5mA max / ACIN 240V)
 - T :Vertical terminal block
 - J :Connector type (Only -12,-15,-24,-36,-48)
 - R :with Remote ON/OFF
 - N :with Cover (Only 24V UL508 is acquired)
 - N1 :with DIN rail
 - V :Output voltage setting potentiometer externaly

Specification is changed at option. Please consult us details.

MODEL	PBA150F-3R3	PBA150F-5	PBA150F-9	PBA150F-12	PBA150F-15	PBA150F-24	PBA150F-36	PBA150F-48
MAX OUTPUT WATTAGE[W]	99	150	150.3	156	150	156	154.8	158.4
DC OUTPUT	3.3V 30A	5V 30A	9V 16.7A	12V 13A	15V 10A	24V 6.5A	36V 4.3A	48V 3.3A

SPECIFICATIONS

	MODEL	PBA150F-3R3	PBA150F-5	PBA150F-9	PBA150F-12	PBA150F-15	PBA150F-24	PBA150F-36	PBA150F-48	
INPUT	VOLTAGE[V]	AC85 - 264 1 ^Φ or DC120 - 370 (AC50 or DC70 optionally available ^{**4})								
	CURRENT[A]	ACIN 100V	1.3typ	2.0typ						
		ACIN 200V	0.7typ	1.0typ						
	FREQUENCY[Hz]	50/60 (47 - 63)								
	EFFICIENCY[%]	ACIN 100V	80typ	83typ	82typ	83typ	84typ	85typ	85typ	85typ
		ACIN 200V	82typ	86typ	85typ	86typ	87typ	88typ	88typ	88typ
	POWER FACTOR(lo=100%)	ACIN 100V	0.98typ	0.99typ						
ACIN 200V	0.87typ	0.93typ								
INRUSH CURRENT[A]	ACIN 100V	20typ (lo=100%) (At cold start)								
	ACIN 200V	40typ (lo=100%) (At cold start)								
LEAKAGE CURRENT[mA]	0.4/0.75max (ACIN 100V/240V 60Hz, lo=100%, According to IEC60950-1)									
OUTPUT	VOLTAGE[V]	3.3	5	9	12	15	24	36	48	
	CURRENT[A]	30	30	16.7	13	10	6.5	4.3	3.3	
	LINE REGULATION[mV]	20max	20max	36max	48max	60max	96max	144max	192max	
	LOAD REGULATION[mV]	40max	40max	100max	100max	120max	150max	240max	240max	
	RIPPLE[mVp-p]	0 to +50C ^{*1}	80max	80max	120max	120max	120max	150max	150max	150max
		-10 - 0C ^{*1}	140max	140max	160max	160max	160max	160max	200max	200max
	RIPPLE NOISE[mVp-p]	0 to +50C ^{*1}	120max	120max	150max	150max	150max	150max	250max	250max
		-10 - 0C ^{*1}	160max	160max	180max	180max	180max	180max	300max	300max
	TEMPERATURE REGULATION[mV]	0 to +50C	50max	50max	90max	120max	150max	240max	360max	480max
		-10 to +50C	60max	60max	120max	150max	180max	290max	450max	600max
	DRIFT[mV]	20max ^{*2}								
	START-UP TIME[ms]	350typ(ACIN 100V, lo=100%)								
	HOLD-UP TIME[ms]	20typ (ACIN 100V, lo=100%)								
OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	2.85 - 3.63 4.00 - 5.50 7.50 - 10.0 10.0 - 13.2 13.2 - 18.0 19.2 - 27.0 28.8 - 39.6 39.0 - 53.0									
OUTPUT VOLTAGE SETTING[V]	3.20 - 3.40 4.90 - 5.20 8.70 - 9.30 11.5 - 12.5 14.5 - 15.5 23.5 - 24.5 35.5 - 36.5 47.0 - 49.0									
OVERCURRENT PROTECTION	Works over 105% of rated current and recovers automatically									
PROTECTION CIRCUIT AND OTHERS	OVERVOLTAGE PROTECTION[V]	4.00 - 5.25	5.75 - 7.00	11.5 - 14.0	15.0 - 18.0	20.0 - 25.0	30.0 - 37.0	43.0 - 50.0	58.0 - 65.0	
	OPERATING INDICATION	LED (Green)								
	REMOTE SENSING	Optional (Only -3R3, -5 Option -K)								
	REMOTE ON/OFF	Optional (Required external power source)								
ISOLATION	INPUT-OUTPUT—RC	^{*3} AC3.000V 1minute. Cutoff current = 10mA. DC500V 50MWmin (At Room Temperature)								
	INPUT-FG	AC2.000V 1minute. Cutoff current = 10mA. DC500V 50MWmin (At Room Temperature)								
	OUTPUT—RC-FG	^{*3} AC500V 1minute. Cutoff current = 100mA. DC500V 50MWmin (At Room Temperature)								
ENVIRONMENT	OPERATING TEMP.HUMID.AND ALTITUDE	-10 to +71C (Required Derating), 20 - 90%RH (Non condensing) 3.000m (10.000feet) max								
	STORAGE TEMP.HUMID.AND ALTITUDE	-20 to +75C, 20 - 90%RH (Non condensing) 3.000m (10.000feet) max								
	VIBRATION	19.6m/s ² (2G), 10 - 55Hz, 3minutes period, 60minutes each along X, Y and Z axis								
	IMPACT	196.1m/s ² (20G), 11ms, once each X, Y and Z axis								
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS	UL60950-1, C-UL(CSA60950-1), EN60950-1, EN50178 Complies with DEN-AN (At only AC input)								
	CONDUCTED NOISE	Complies with FCC Part15 classB, VCCI-B, CISPR22-B, EN55011-B, EN55022-B								
	CE MARKING	Low Voltage Directive, EMC Directive								
	HARMONIC ATTENUATOR	Complies with IEC61000-3-2								
OTHERS	CASE SIZE/WEIGHT	34×93×168mm (without terminal block) (W×H×D) / 560g max (without cover)								
	COOLING METHOD	Convection								

^{*1} Measured by 20MHz oscilloscope or Ripple-Noise meter(equivalent to KEISOKU-GIKEN : RM101).

^{*2} Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25C.

^{*3} Applicable when Remote ON/OFF(optional) is added. RC is insulated with input, output and FG.

^{*4} Derating is required.Consult us for details.

^{**} Parallel operation with other model is not possible.

^{**} Derating is required when operated with cover.

^{**} A sound may occur from power supply at peak loading.