


T-31-15

**RF AMP, FOR VHF TV TUNER**

- LOW NF, HIGH  $G_{pe}$
- $NF=2.0dB$  Typ.  $G_{pe}=23dB$  Typ. ( $f=200MHz$ )
- FORWARD AGC CAPABILITY TO 30 dB

**ABSOLUTE MAXIMUM RATINGS ( $T_a=25^\circ C$ )**

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	$V_{CB0}$	30	V
Collector-Emitter Voltage	$V_{CE0}$	30	V
Emitter-Base Voltage	$V_{EB0}$	5	V
Collector Current (DC)	$I_c$	20	mA
Collector Dissipation	$P_c$	150	mW
Junction Temperature	$T_j$	150	$^\circ C$
Storage Temperature	$T_{stg}$	-55 - 150	$^\circ C$

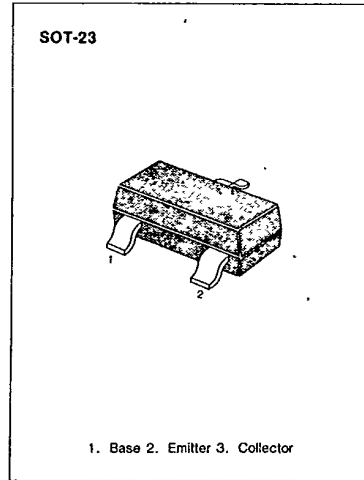


**ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ C$ )**

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Collector Cutoff Current	$I_{c0}$	$V_{CB}=20V, I_E=0$			0.1	$\mu A$
DC Current Gain	$h_{FE}$	$V_{CE}=10V, I_c=3mA$	60	120	240	
Current Gain Bandwidth Product	$f_T$	$V_{CE}=10V, I_c=-3mA$	400	600		MHz
Reverse Transfer Capacitance	$C_{re}$	$f=1MHz, V_{CB}=10V, I_E=0$		0.3	0.5	pF
Power Gain	$G_{pe}$	$f=200MHz, I_c=3mA$	20	23		dB
AGC Current	$I_{AGC}$	$f=200MHz$		-10	-12	mA
Noise Figure	NF	$I_E$ of $G_{pe} -30dB$ $f=200MHz, I_c=3mA$		2.0	3.0	dB

**$h_{FE}$  CLASSIFICATION**







Classification	R	O	Y
$h_{FE}$	60-120	90-180	120-240



KSC2755

NPN EPITAXIAL SILICON TRANSISTOR

T-31-15

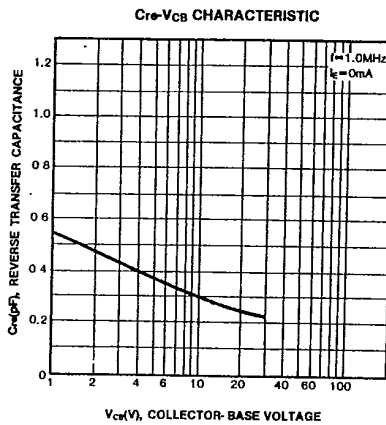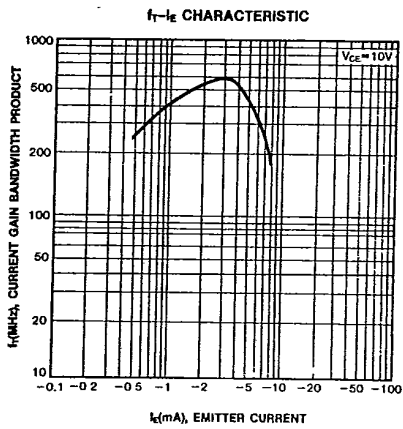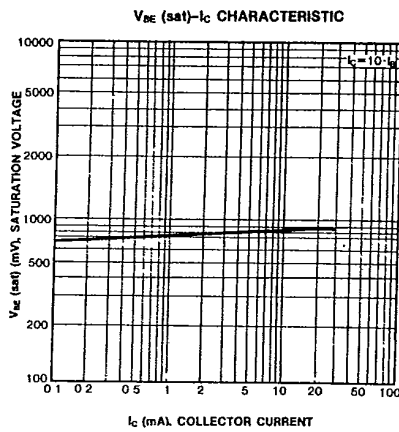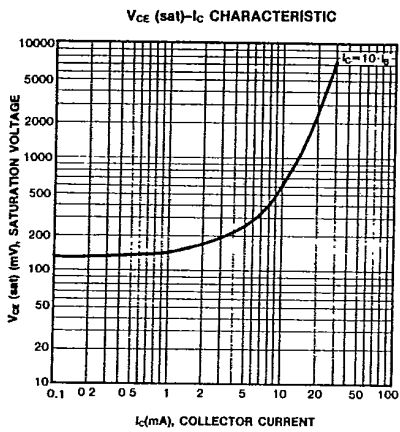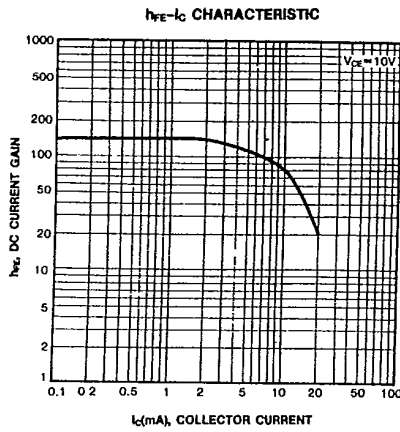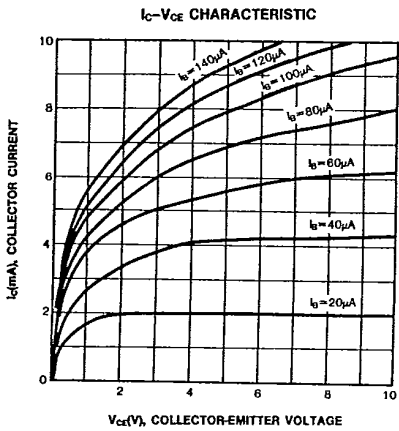







3



**KSC2755**

**NPN EPITAXIAL SILICON TRANSISTOR**

T-31-15

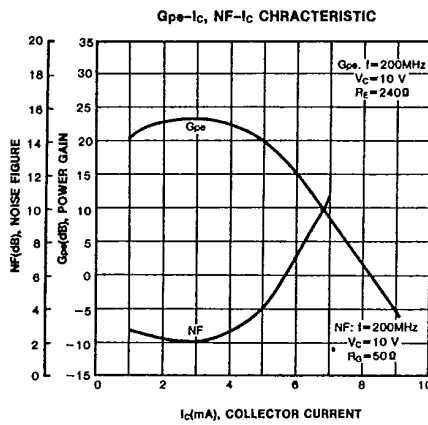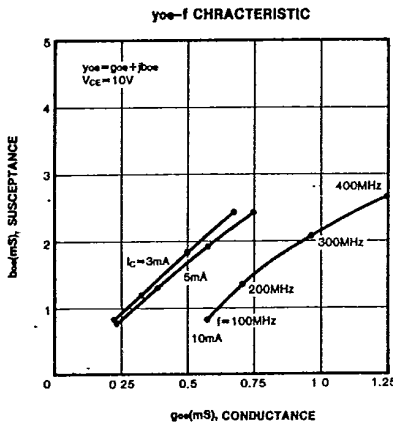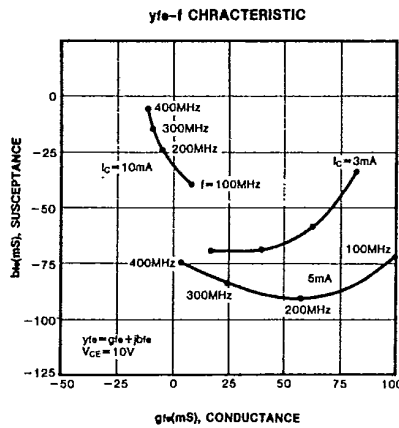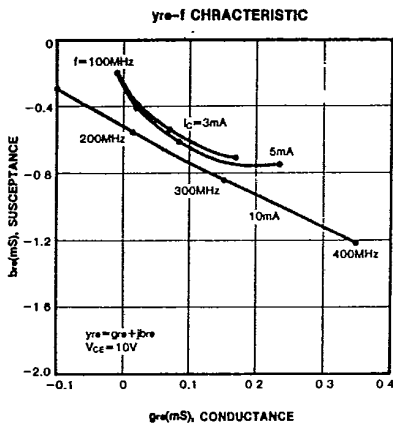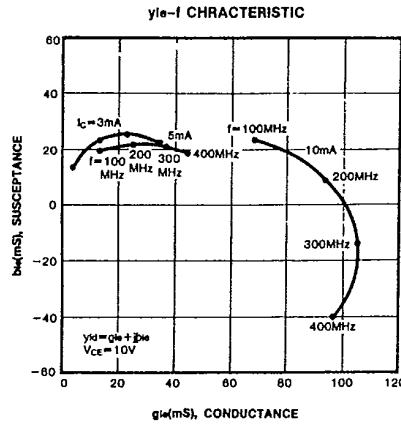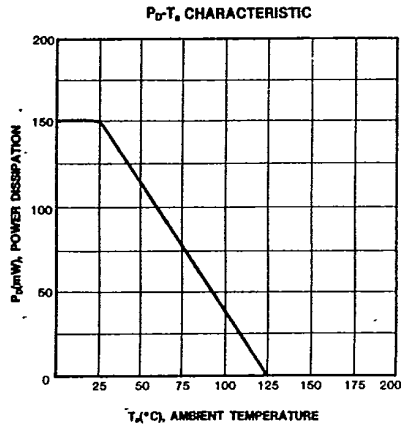


**KSC2755**

**NPN EPITAXIAL SILICON TRANSISTOR**

T-31-15

POWER GAIN AND NOISE FIGURE TEST

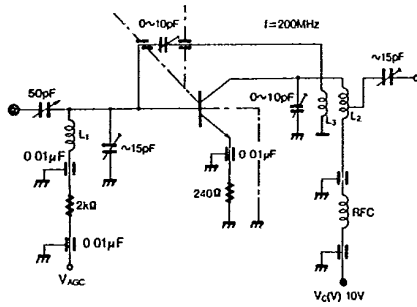

3