

ST1900C..R SERIES

PHASE CONTROL THYRISTORS

Hockey Puk Version

Features

- Double side cooling
- High surge capability
- High mean current
- Fatigue free


Typical Applications

- DC motor controls
- Controlled DC power supplies
- AC controllers

Major Ratings and Characteristics

Parameters	ST1900C..R	Units
$I_{T(AV)}$	1625	A
@ T_C	80	°C
$I_{T(AV)}$	1940	A
@ T_{hs}	55	°C
$I_{T(RMS)}$	3500	A
@ T_{hs}	25	°C
I_{TSM}	@ 50Hz 27500	A
	@ 60Hz 29000	A
I^2t	@ 50Hz 3780	KA ² s
	@ 60Hz 3490	KA ² s
V_{DRM}/V_{RRM}	4500 to 5200	V
t_q	typical 500	µs
T_J	max. 125	°C

1940A

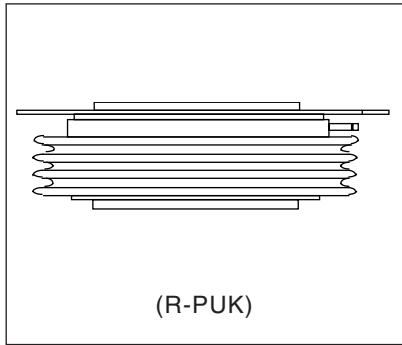

ST1900C..R Series

Bulletin I25197 rev. B 02/00

International
IR Rectifier

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V_{DRM}/V_{RRM} , max. repetitive peak and off-state voltage V	V_{RSM} , maximum non-repetitive peak voltage V	I_{DRM}/I_{RRM} max. @ $T_C = 125^\circ\text{C}$ mA
ST1900C..R	45	4500	4600	250
	46	4600	4700	
	48	4800	4900	
	50	5000	5100	
	52	5200	5300	

On-state Conduction

Parameter		ST1900C..R	Units	Conditions			
$I_{T(AV)}$	Max. average on-state current @ Case temperature	1625 (1030)	A	180° conduction, half sine wave double side (single side [anode side]) cooled			
		80	°C				
$I_{T(AV)}$	Max. average on-state current @ Heatsink temperature	1940 (800)	A				
		55 (85)	°C				
$I_{T(RMS)}$	Max. RMS on-state current	3500	A	DC @ 25°C heatsink temperature double side cooled			
I_{TSM}	Max. peak, one-cycle non-repetitive surge current	27500	A	t = 10ms	No voltage	Sinusoidal half wave, Initial T _C = 125°C	
		29000		t = 8.3ms	reapplied		
		22000		t = 10ms	50% V _{RRM}		
		23500		t = 8.3ms	reapplied		
I^2t	Maximum I ² t for fusing	3780	KA ² s	t = 10ms	No voltage		
		3490		t = 8.3ms	reapplied		
		2420		t = 10ms	50% V _{RRM}		
		2290		t = 8.3ms	reapplied		
$V_{T(TO)}$	Max. value of threshold voltage	1.4	V	T _J = T _J max.			
r_t	Max. value of on-state slope resistance	0.31	mΩ	T _J = T _J max.			
V_{TM}	Max. on-state voltage	2.1	V	I _{pk} = 2900A, T _C = 25°C			
I_L	Typical latching current	300	mA	T _J = 25°C, V _D = 5V			

Switching

Parameter	ST1900C..R	Units	Conditions
di/dt Max. repetitive 50Hz (no repetitive) rate of rise of turned-on current	150 (300)	A/ μs	From 67% V_{DRM} to 1000A gate drive 20V, 10Ω , $t_f = 0.5\mu\text{s}$ to 1A, $T_J = T_J \text{ max.}$
t_d Maximum delay time	2.5	μs	Gate drive 30V, 15Ω , $V_d = 67\% V_{DRM}$, $T_J = 25^\circ\text{C}$ Rise time $0.5\mu\text{s}$
t_q Typical turn-off time	500		$I_T = 1000\text{A}$, $t_p = 1\text{ms}$, $T_J = T_J \text{ max.}$, $V_{RM} = 50\text{V}$, $dI_{FR}/dt = 20\text{A}/\mu\text{s}$, $V_{DR} = 67\% V_{DRM}$, $dV_{DR}/dt = 8\text{V}/\mu\text{s}$ linear

Blocking

Parameter	ST1900C..R	Units	Conditions
dv/dt Maximum linear rate of rise of off-state voltage	500	V/ μ s	$T_J = T_J$ max. to 67% rated V_{DRM}
I_{RRM} I_{JDRM} Max. peak reverse and off-state leakage current	250	mA	$T_J = 125^\circ\text{C}$ rated V_{DRM}/V_{RRM} applied

Triggering

Parameter	ST1900C..R	Units	Conditions
P_{GM} Maximum peak gate power	150	W	$t_p = 100\mu\text{s}$
$P_{G(AV)}$ Maximum average gate power	10		
I_{GM} Max. peak positive gate current	30	A	Anode positive with respect to cathode
V_{GM} Max. peak positive gate voltage	30	V	Anode positive with respect to cathode
$-V_{GM}$ Max. peak negative gate voltage	0.25	V	Anode negative with respect to cathode
I_{GT} Maximum DC gate current required to trigger	400	mA	$T_C = 25^\circ\text{C}$, $V_{DRM} = 5\text{V}$
V_{GT} Maximum gate voltage required to trigger	4	V	$T_C = 25^\circ\text{C}$, $V_{DRM} = 5\text{V}$
V_{GD} DC gate voltage not to trigger	0.25	V	$T_C = 125^\circ\text{C}$ Max. gate current/voltage not to trigger is the max. value which will not trigger any unit with rated V_{DRM} anode-to-cathode applied

Thermal and Mechanical Specification

Parameter	ST1900C..R	Units	Conditions
T_J max. Max. operating temperature	125	$^\circ\text{C}$	On-state (conducting)
T_{stg} Max. storage temperature range	-55 to 125		
R_{thJ-C} Thermal resistance, junction to case	0.019 0.0095	K/W	DC operation single side cooled DC operation double side cooled
$R_{th(C-h)}$ Thermal resistance, case to heatsink	0.004 0.002	K/W	Single side cooled Double side cooled
F Mounting force $\pm 10\%$	43000 (4400)	N (Kg)	
wt Approximate weight	1600	g	
Case style	(R-PUK)		See Outline Table

ΔR_{thJ-C} Conduction

(The following table shows the increment of thermal resistance R_{thJ-C} when devices operate at different conduction angles than DC)

Conduction angle	Single side	Double side	Units	Conditions
180°	0.0010	0.0010	K/W	$T_J = T_J$ max.
120°	0.0017	0.0017		
60°	0.0044	0.0044		


ST1900C..R Series

Bulletin I25197 rev. B 02/00

Ordering Information Table

Device Code							
ST	190	0	C	52	R	1	
1	2	3	4	5	6	7	8
1	- Thyristor						
2	- Essential part number						
3	- 0 = Converter grade						
4	- C = Ceramic Puk						
5	- Voltage code: Code x 100 = V_{RRM} (See Voltage Rating Table)						
6	- R = Puk Case						
7	- 0 = Eyelet terminals (Gate and Auxiliary Cathode Unsoldered Leads)						
	1 = Fast-on terminals (Gate and Auxiliary Cathode Unsoldered Leads)						
	2 = Eyelet terminals (Gate and Auxiliary Cathode Soldered Leads)						
	3 = Fast-on terminals (Gate and Auxiliary Cathode Soldered Leads)						
8	- Critical dv/dt: None = 500V/ μ sec (Standard selection)						
	L = 1000V/ μ sec (Special selection)						

Outline Table

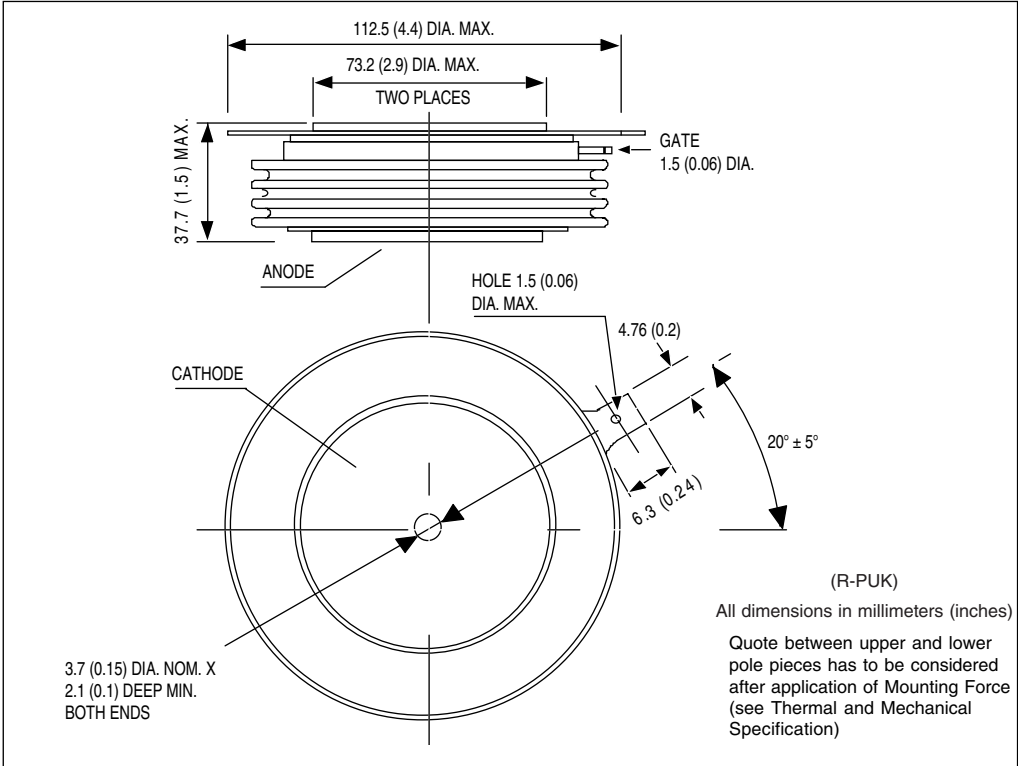

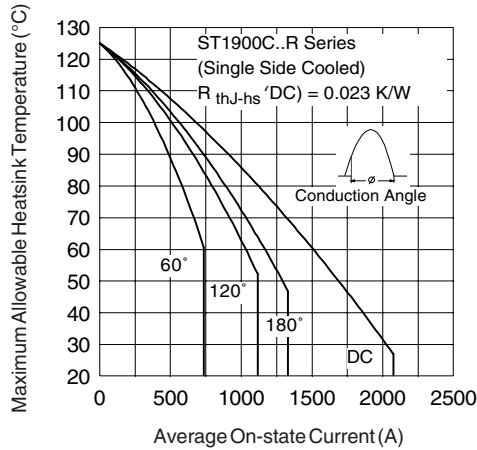


Fig. 1 - Current Ratings Characteristics

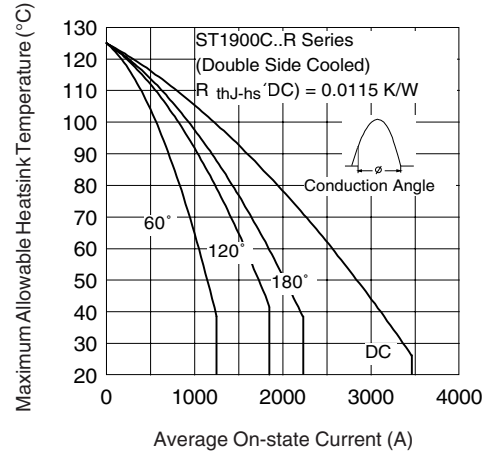


Fig. 2 - Current Ratings Characteristics

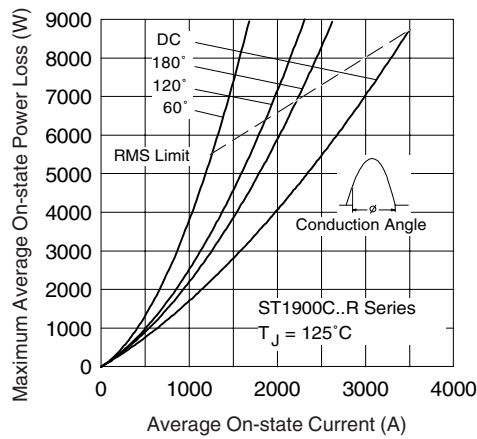


Fig. 3 - On-state Power Loss Characteristics

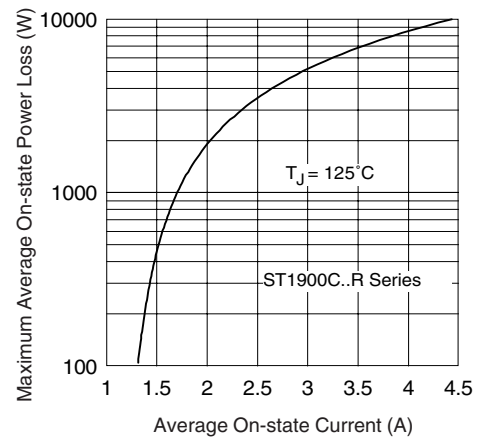


Fig. 4 - On-state Power Loss Characteristics

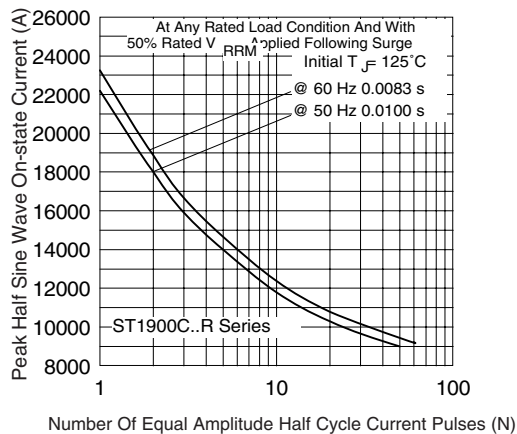


Fig. 5 - Maximum Non-Repetitive Surge Current
Single and Double Side Cooled

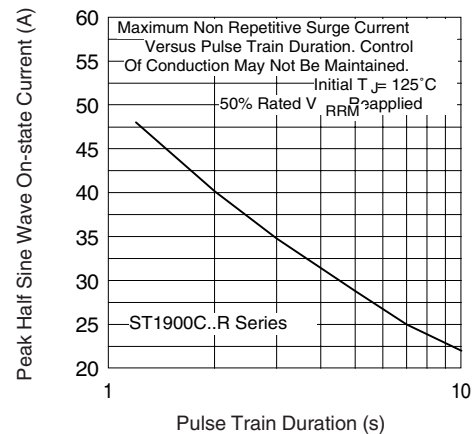


Fig. 6 - Maximum Non-Repetitive Surge Current
Single and Double Side Cooled

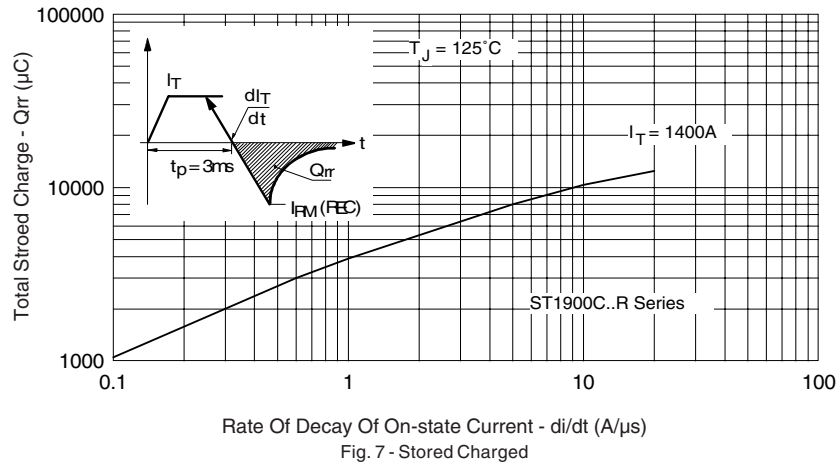


Fig. 7 - Stored Charged

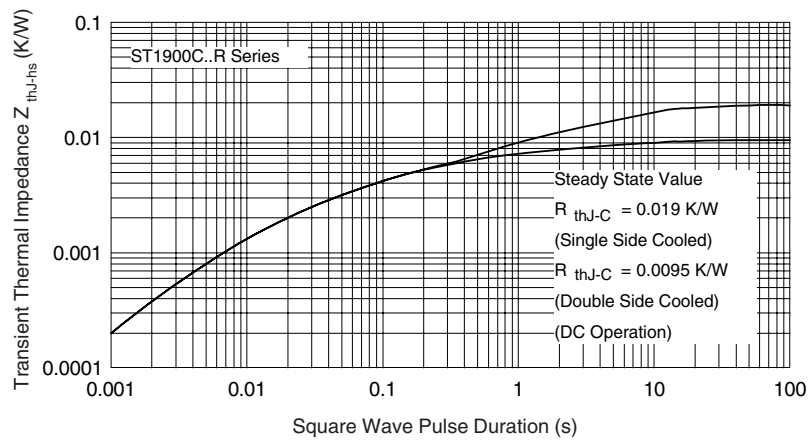


Fig. 10 - Thermal Impedance Z_{thJ-hs} Characteristics

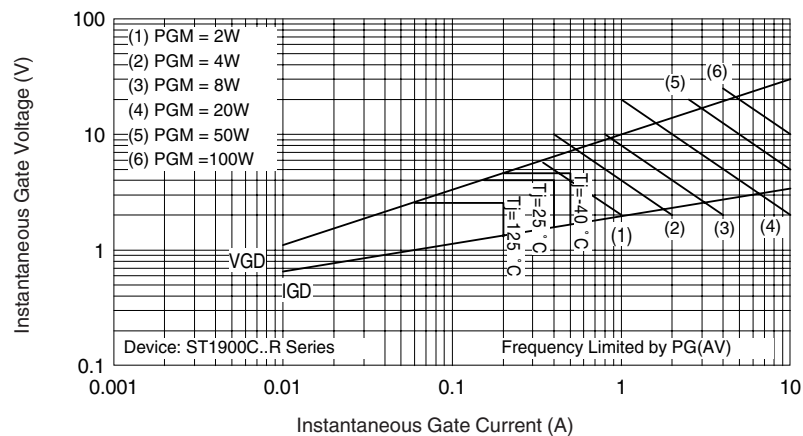


Fig. 11 - Gate Characteristics