

NPN SILICON RF POWER TRANSISTOR

DESCRIPTION:

The **ASI ALR015** is an NPN silicon bipolar transistor designed for L-Band pulsed radar applications. It utilizes internal matching and gold metalization for high reliability and good VSWR capability.


FEATURES:

- 1.2 to 1.4 GHz operation
- Internal Input/Output Matching Network
- $P_G = 8.5$ dB at 14.5 W/1400 MHz
- **Omnigold™** Metalization System
- 5:1 VSWR capability rated at conditions

MAXIMUM RATINGS

I_C	1.8 A
V_{CC}	32 V
P_{DISS}	37.5 W @ $T_C = 25^\circ\text{C}$
T_J	-65°C to $+250^\circ\text{C}$
T_{STG}	-65°C to $+200^\circ\text{C}$
θ_{JC}	4.0 $^\circ\text{C/W}$

PACKAGE STYLE .310 2L FLG

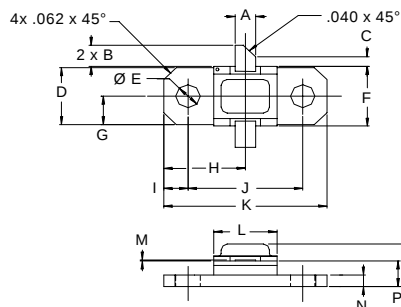

DIM	MINIMUM inches / mm	MAXIMUM inches / mm
A	.095 / 2.41	.105 / 2.67
B	.100 / 2.54	.120 / 3.05
C	.050 / 1.27	
D	.286 / 7.26	.306 / 7.77
E	.110 / 2.79	.130 / 3.30
F	.306 / 7.77	.318 / 8.08
G	.148 / 3.76	
H	.400 / 10.16	
I	.119 / 3.02	
J	.552 / 14.02	.572 / 14.53
K	.790 / 20.07	.810 / 20.57
L	.300 / 7.62	.320 / 8.13
M	.003 / 0.08	.006 / 0.15
N	.052 / 1.32	.072 / 1.83
P	.118 / 3.00	.131 / 3.33
R		.230 / 5.84

ORDER CODE: ASI10511

CHARACTERISTICS $T_C = 25^\circ\text{C}$

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
BV_{CBO}	$I_C = 15$ mA	48			V
BV_{CER}	$I_C = 15$ mA $R_{BE} = 10 \Omega$	48			V
BV_{EBO}	$I_E = 1.5$ mA	3.5			V
I_{CES}	$V_{CE} = 28$ V $V_{BE} = 28$ V			1.5	mA
h_{FE}	$V_{CE} = 5.0$ V $I_C = 1.0$ A	30		300	---

**CHARACTERISTICS** $T_C = 25\text{ }^{\circ}\text{C}$

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
P_G	$V_{CC} = 28\text{ V}$ $P_{OUT} = 15\text{ W}$ $f = 1.2\text{ to }1.4\text{ GHz}$	8.5			dB
η_c	$P_{IN} = 2.0\text{ W}$	48			%

Pulse width = 1000 μsec , Duty Cycle = 10%**IMPEDANCE DATA**

FREQ	$Z_{IN} (\Omega)$	$Z_{CL} (\Omega)$
1.2 GHz	$3.0 + j6.5$	$16 + j3.0$
1.3 GHz	$3.5 + j7.5$	$13 + j6.0$
1.4 GHz	$5.0 + j7.0$	$11 + j5.0$