


TOSHIBA LED LAMP

TLSU1102 (T10), TLOU1102 (T10), TLYU1102 (T10)
TLGU1102 (T10), TLPGU1102 (T10)

PANEL CIRCUIT INDICATOR

Unit in mm

- Surface Mount Device
- 3.2 (L) × 2.8 (W) × 3.4 (H) mm Size
- $\phi 2.8$ mm Diameter Lens-top Type
- InGaAlP LED
- Line-up
 - Colors : Red, Orange, Yellow, Green, Pure Green
- Available of Automounting Machine Use
- Low Drive Current, High Intensity Light Emission
- Clear luminescence is obtained.
- High Operating Temperature : $T_{opr} \cdot T_{stg}$ $-40 \sim 100^{\circ}\text{C}$
- Reflow soldering is possible.
- Standard embossed taping
 - 8 mm Pitch : T10 (500 pcs / reel)
- Applications : Automotive use, Message Signboard, Backlight, etc.

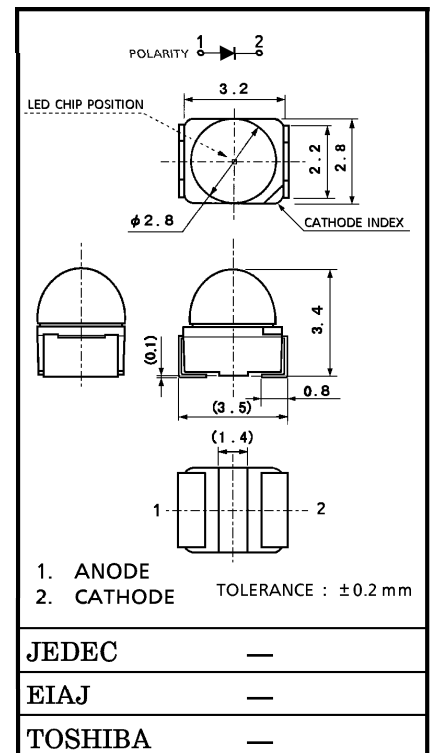

Weight : 42 mg

LINE-UP

PRODUCT NAME	COLOR	MATERIAL
TLSU1102	Red	InGaAlP
TLOU1102	Orange	InGaAlP
TLYU1102	Yellow	InGaAlP
TLGU1102	Green	InGaAlP
TLPGU1102	Pure Green	InGaAlP

MAXIMUM RATINGS ($T_a = 25^{\circ}\text{C}$)

PRODUCT NAME	FORWARD CURRENT I_F (mA)	REVERSE VOLTAGE V_R (V)	POWER DISSIPATION P_D (mW)	OPERATING TEMPERATURE T_{opr} ($^{\circ}\text{C}$)	STORAGE TEMPERATURE T_{stg} ($^{\circ}\text{C}$)
TLSU1102	30	4	72	$-40 \sim 100$	$-40 \sim 100$
TLOU1102	30	4	72		
TLYU1102	30	4	75		
TLGU1102	30	4	84		
TLPGU1102	30	4	84		

961001EAC1

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

ELECTRICAL CHARACTERISTICS (Ta = 25°C)

PRODUCT NAME	FORWARD VOLTAGE V_F				REVERSE CURRENT I_R	
	MIN	TYP.	MAX	I_F	MAX	V_R
TLSU1102	—	2.0	2.4	20	50	4
TLOU1102	—	2.0	2.4	20	50	4
TLYU1102	—	2.1	2.5	20	50	4
TLGU1102	—	2.3	2.8	20	50	4
TLPGU1102	—	2.3	2.8	20	50	4
Unit	V			mA	μA	V

OPTICAL CHARACTERISTICS-1 (Ta = 25°C)







PRODUCT NAME	LUMINOUS INTENSITY I_V			
	MIN	TYP.	MAX	I_F
TLSU1102	85	200	—	20
TLOU1102	85	250	—	20
TLYU1102	47.6	130	—	20
TLGU1102	47.6	120	—	20
TLPGU1102	8.5	30	—	20
Unit	mcd			mA

OPTICAL CHARACTERISTICS-2 (Ta = 25°C)







PRODUCT NAME	EMISSION SPECTRUM						
	Peak Emission Wavelength λ_p			$\Delta\lambda$	Dominant Wavelength λ_d		
	MIN	TYP.	MAX		MIN	TYP.	MAX
TLSU1102	—	636	—	17	—	623	—
TLOU1102	—	612	—	15	—	605	—
TLYU1102	—	590	—	13	—	587	—
TLGU1102	—	574	—	11	—	571	—
TLPGU1102	—	562	—	11	—	558	—
UNIT	nm			nm	nm		

(Note) : This visible LED lamp also emits some IR light.
If a photodetector is located near the LED lamp, please ensure that it will not be affected by this IR light.







TLSU1102

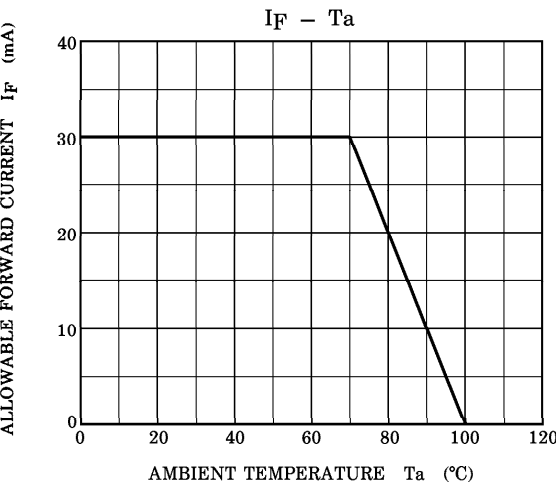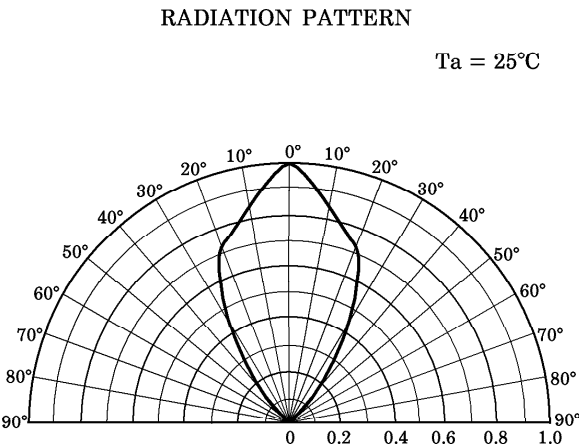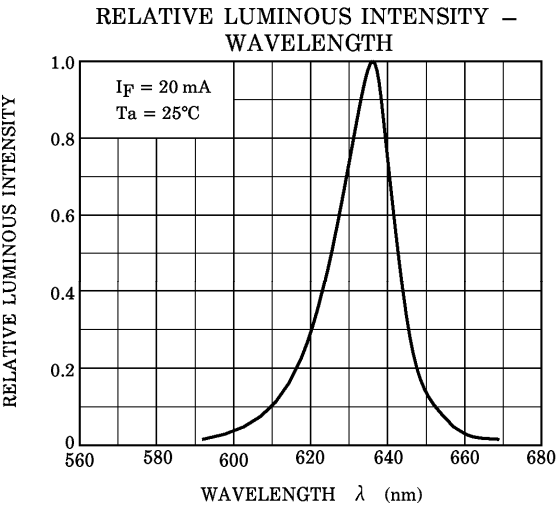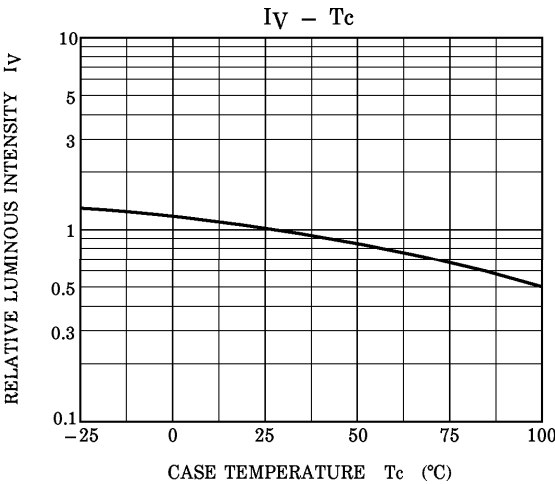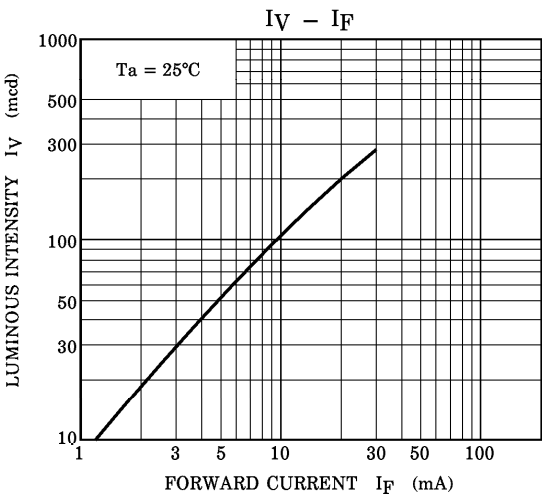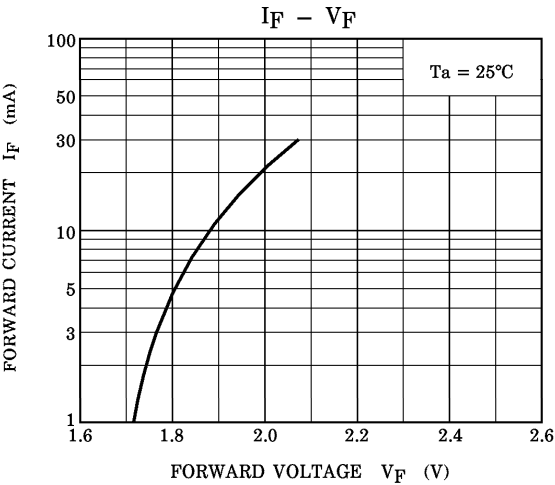





TLOU1102

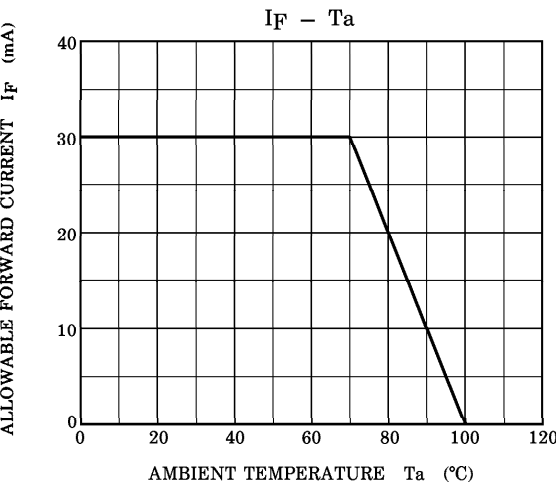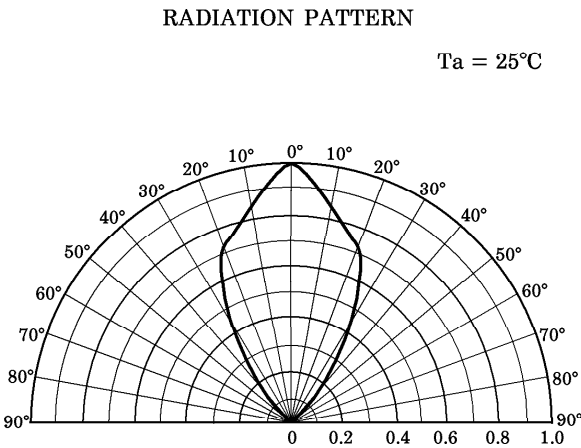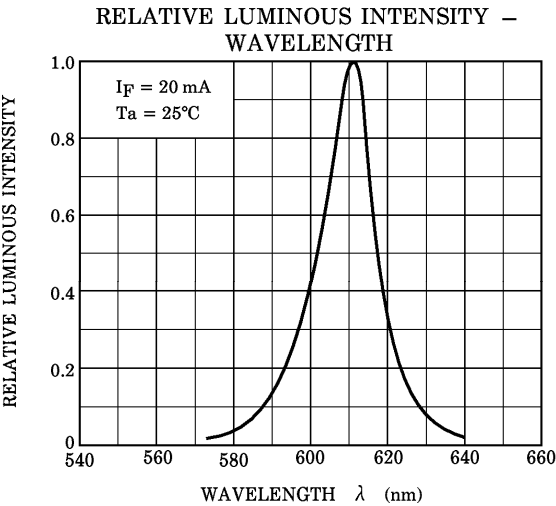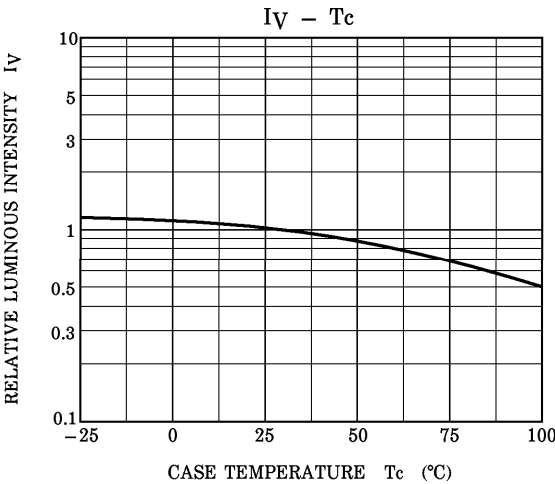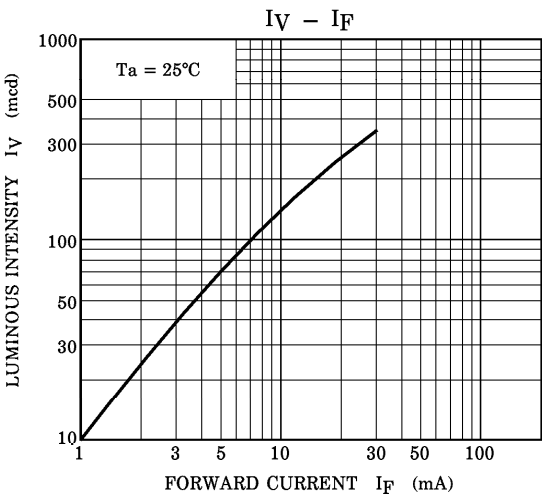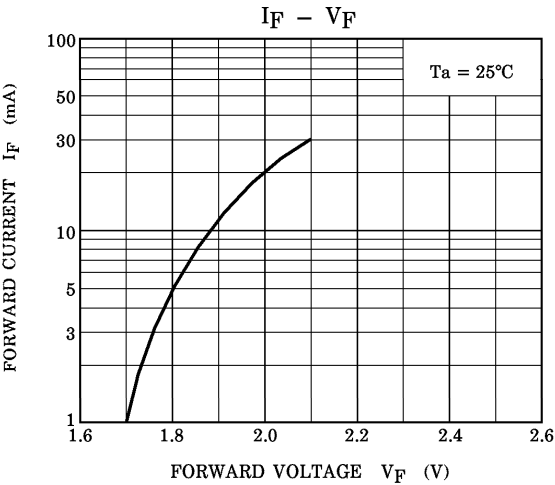

TLYU1102

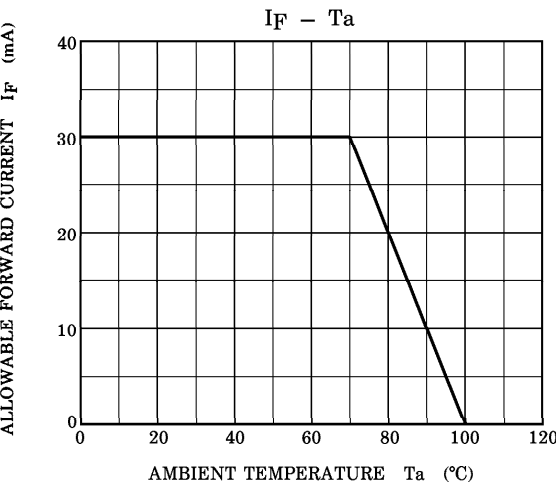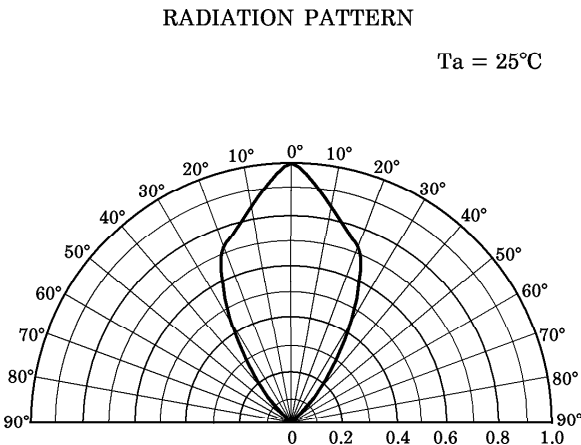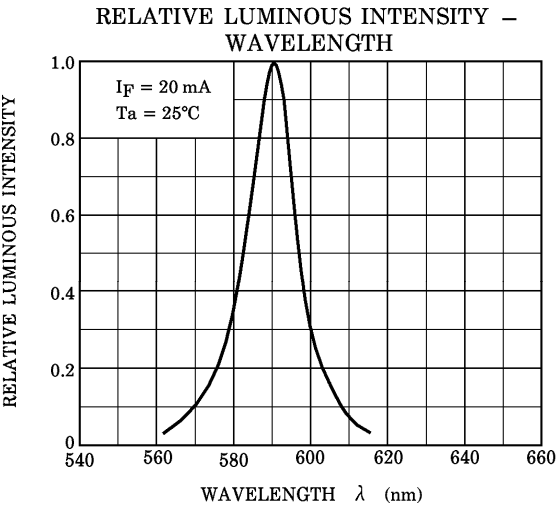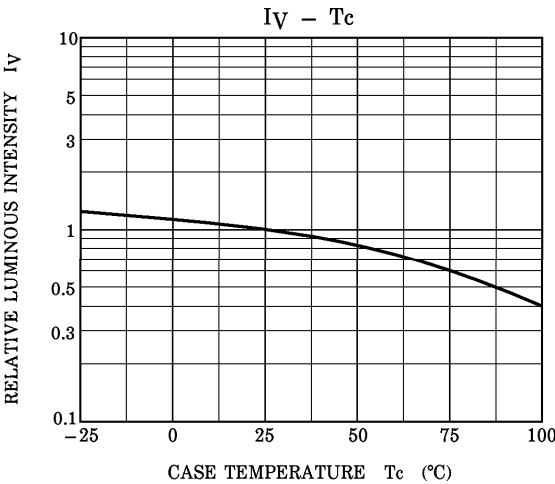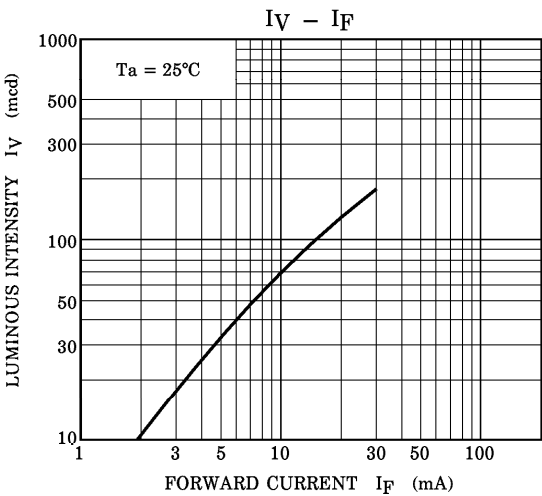
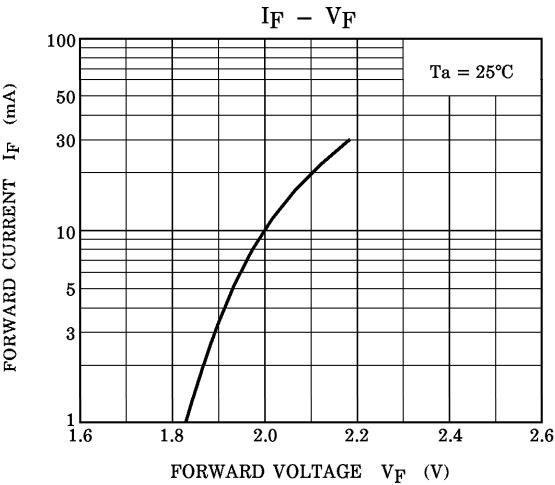


TLGU1102



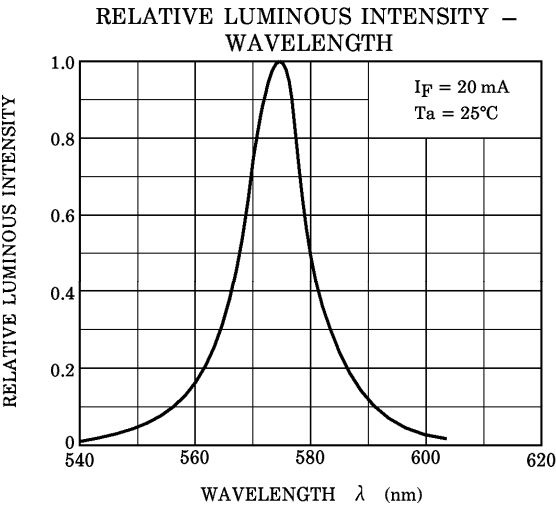
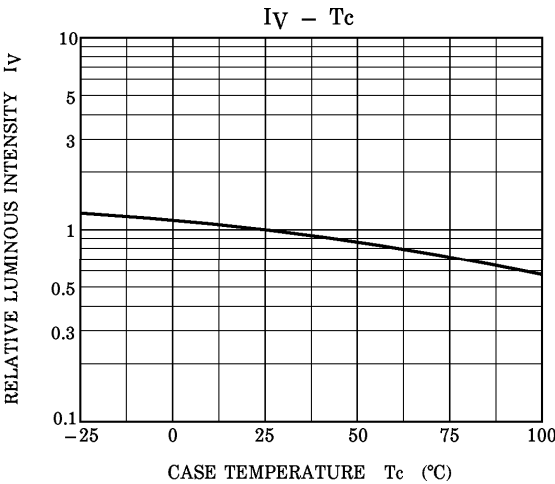
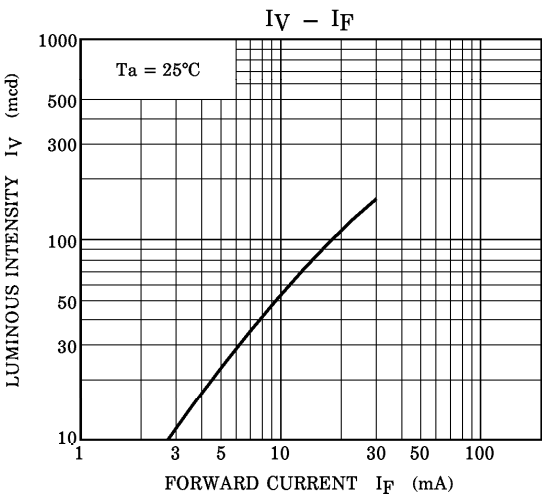
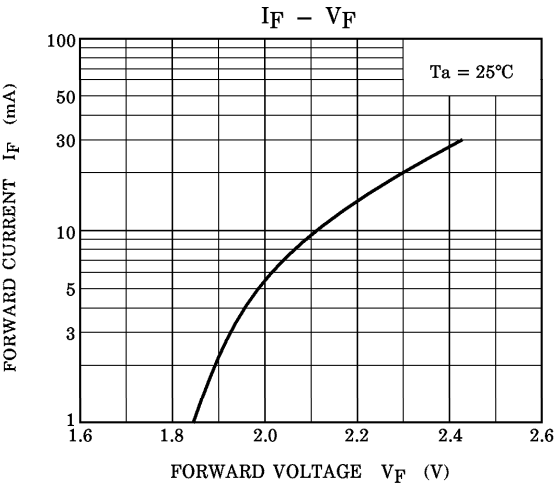


RADIATION PATTERN

$T_a = 25^\circ\text{C}$

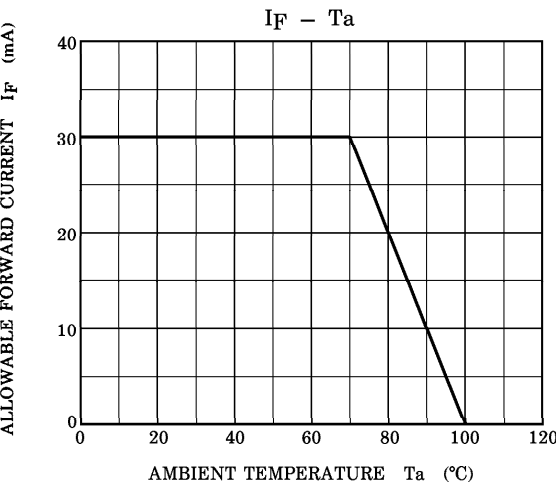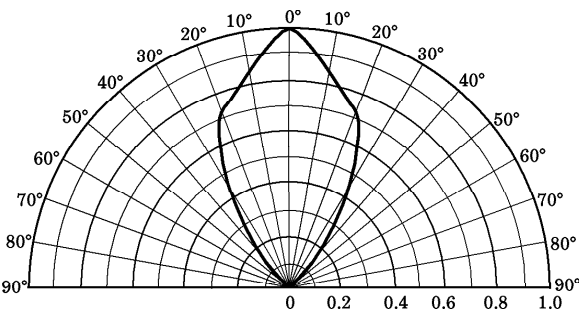


TLPGU1102

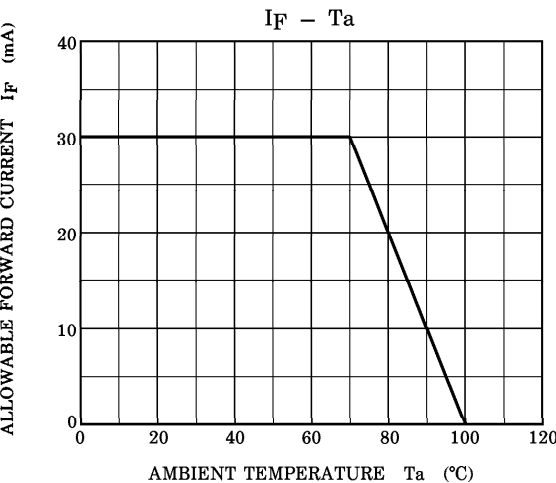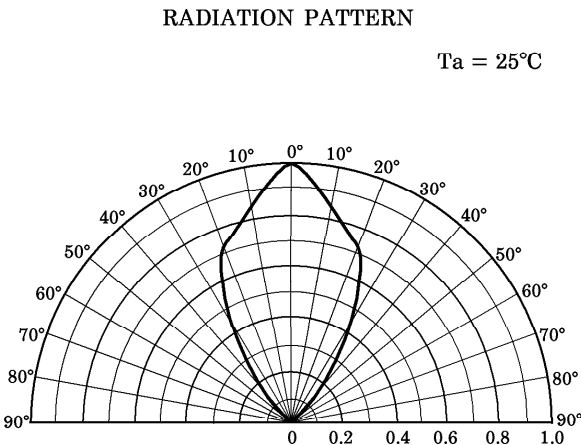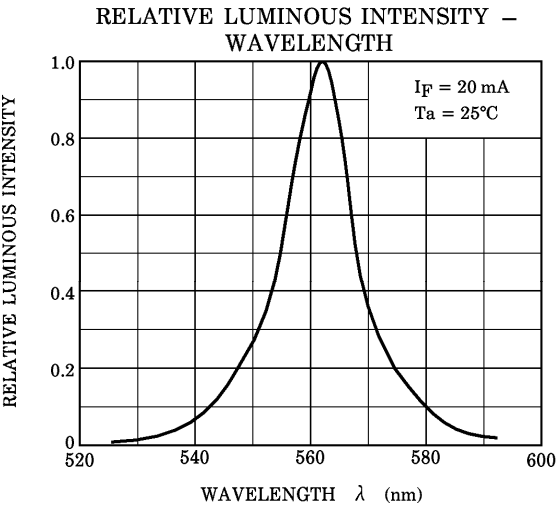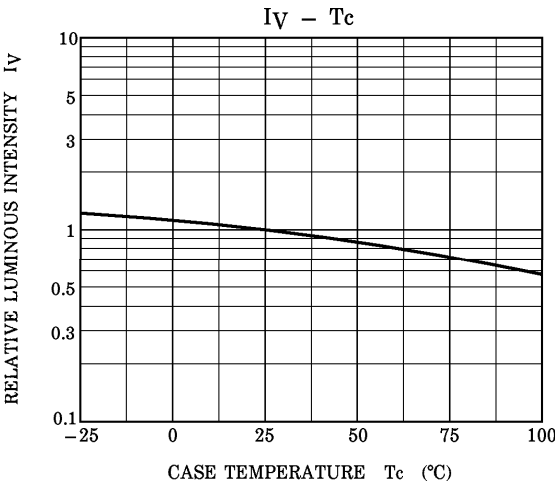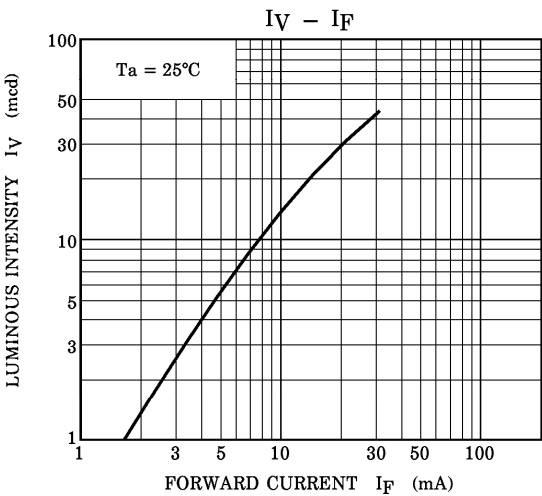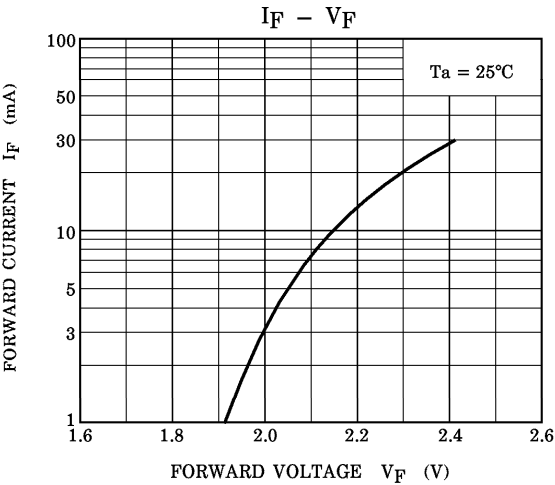

SOLDERING

Reflow soldering


Temperature profile

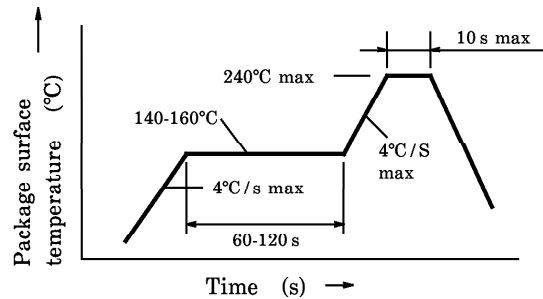

(*) Reflow is permitted just one time.

Recommended soldering pattern

(Unit in mm)

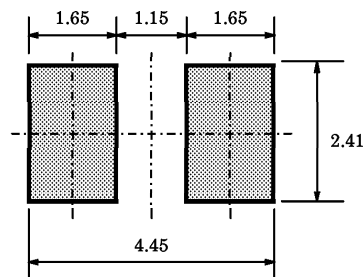

RECOMMENDATION FOR MANUAL SOLDERING

Soldering iron	: Less than 25 W
Temperature	: Lower than 300°C
Time	: Within 3 s


POST SOLDERING CLEANING

When cleaning after soldering is needed, the following condition must be adhered to.

Cleaning solvents	: AK225 or Alcohol
Temperature	: 50°C (max) for 30 s (max) or 30°C (max) for 3 minutes (max)
Ultrasonic	: 300 W max


3. Dimension of reel

(Unit in mm)

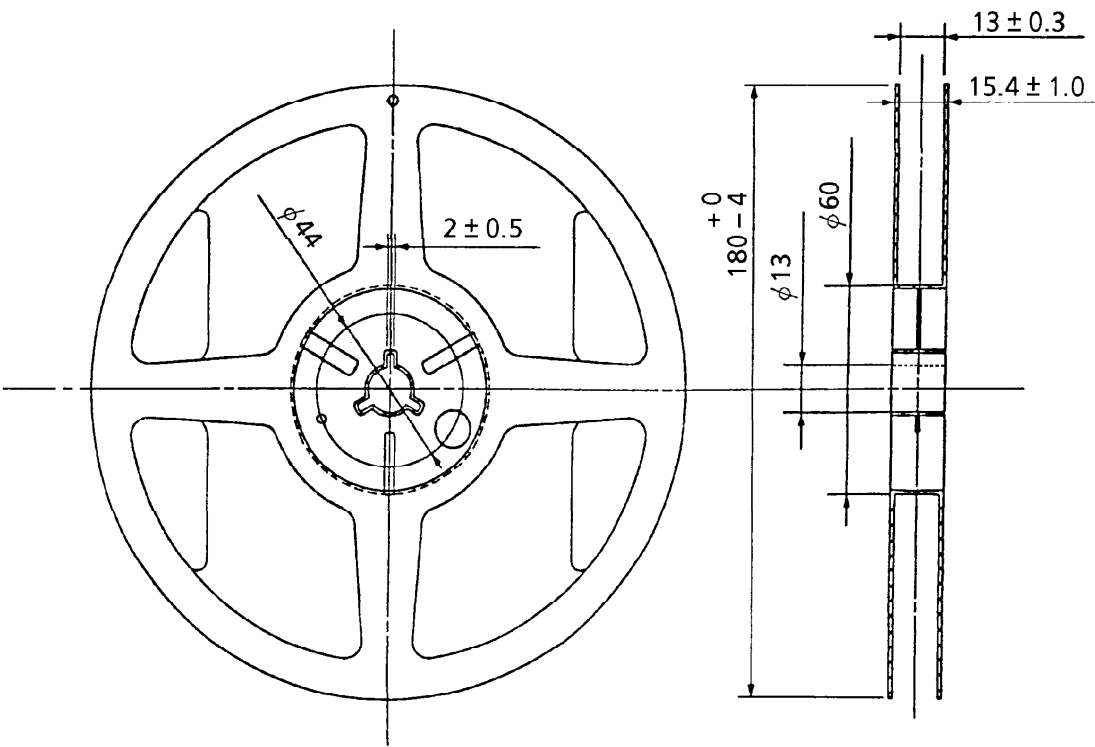

4. Leading part

(Unit in mm)

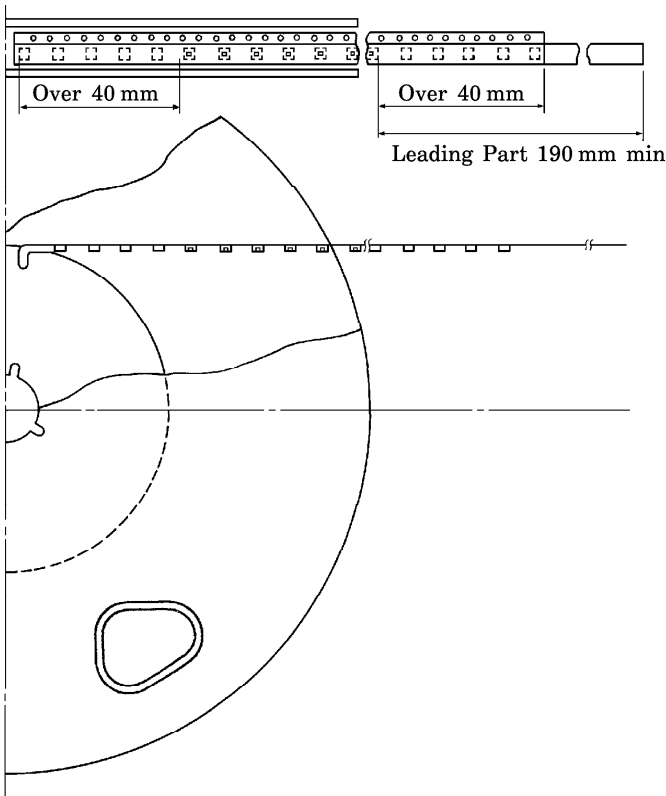

5. Packing Form

(1) Number of Devices per Reel and Carton

Reel	500 devices
Carton	2500 devices

(2) Packing : Silica gel and reel are packed into sealed aluminum pack.


6. Notation Method

(1) Example : TLSU1102 (T10)

P/N :

TYPE	TLSU1102		
ADD. C	(T10)	Q'TY	500 pcs
NOTE	(rank symbol)	Lot Number	

(2) Label location :

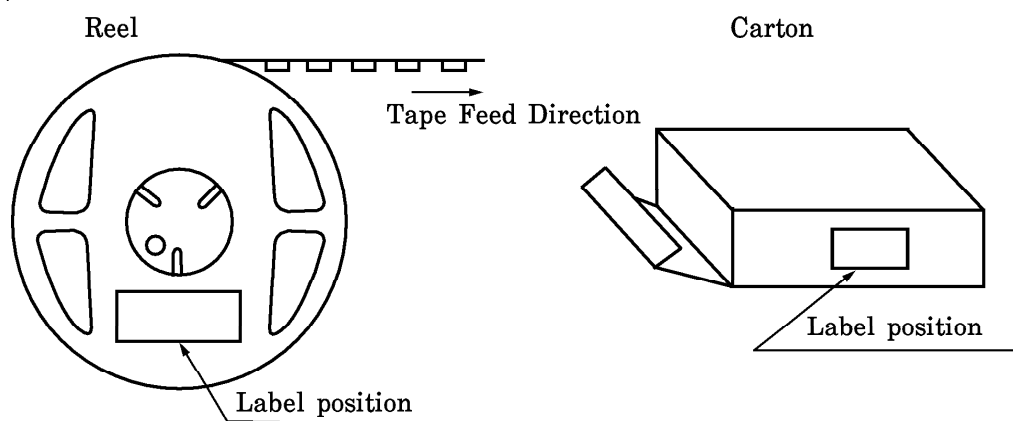

Aluminum pack : Attached to center of one side