

MNLM185BY-2.5-X REV 0A0

 Original Creation Date: 08/15/95
 Last Update Date: 02/11/99
 Last Major Revision Date: 08/15/95

MICROPOWER VOLTAGE REFERENCE DIODE

General Description

The LM185BY-2.5 is a micropower 2-terminal band-gap voltage regulator diode. Operating over a 20 μ A to 20 mA current range, it features exceptionally low dynamic impedance and good temperature stability. On-chip trimming is used to provide tight voltage tolerance. Since the LM185BY-2.5 band-gap reference uses only transistors and resistors, low noise and good long term stability result.

Careful design of the LM185BY-2.5 has made the device exceptionally tolerant of capacitive loading, making it easy to use in almost any reference application. The wide dynamic operating range allows its use with widely varying supplies with excellent regulation.

The extremely low power drain of the LM185BY-2.5 makes it useful for micropower circuitry. This voltage reference can be used to make portable meters, regulators or general purpose analog circuitry with battery life approaching shelf life. Further, the wide operating current allows it to replace older references with a tighter tolerance part. For applications requiring 1.2V see LM185BY-1.2.

Industry Part Number

LM185BY

NS Part Numbers

 LM185BYH2.5-SMD
 LM185BYH2.5/883

Prime Die

LM185

Controlling Document

SEE FEATURES SECTION

Processing

MIL-STD-883, Method 5004

Quality Conformance Inspection

MIL-STD-883, Method 5005

Subgrp	Description	Temp (°C)
1	Static tests at	+25
2	Static tests at	+125
3	Static tests at	-55
4	Dynamic tests at	+25
5	Dynamic tests at	+125
6	Dynamic tests at	-55
7	Functional tests at	+25
8A	Functional tests at	+125
8B	Functional tests at	-55
9	Switching tests at	+25
10	Switching tests at	+125
11	Switching tests at	-55

Features

- Operating current of 20uA to 20mA.
- 1 Ohm dynamic impedance (Typical).
- Low temperature coefficient
- Low voltage reference-2.5V
- CONTROLLING DOCUMENT:
LM185BYH2.5-SMD 5962-8759406XA

(Absolute Maximum Ratings)

(Note 1)

Reverse Current	30mA
Forward Current	10mA
Operating Temperature Range	-55 C to +125 C
Maximum Junction Temperature	150 C
Storage Temperature	-55 C to +150 C
Lead Temperature (Soldering, 10 seconds)	300 C
Thermal Resistance	
ThetaJA	
H-Pkg (Still Air)	300 C/W
H-Pkg (500LF/Min Air flow)	139 C/W
ThetaJC	
H-Pkg	57 C/W
Package Weight (Typical)	

Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not guarantee specific performance limits. For guaranteed specifications and test conditions, see the Electrical Characteristics. The guaranteed specifications apply only for the test conditions listed. Some performance characteristics may degrade when the device is not operated under the listed test conditions.

Electrical Characteristics

DC PARAMETERS:

SYMBOL	PARAMETER	CONDITIONS	NOTES	PIN-NAME	MIN	MAX	UNIT	SUB-GROUPS
Vref	Reverse Breakdown Voltage	Ir = 20uA			2.462	2.538	V	1
		Ir = 30uA			2.425	2.575	V	2, 3
		Ir = 1mA			2.462	2.538	V	1
					2.425	2.575	V	2, 3
		Ir = 20mA			2.462	2.538	V	1
					2.425	2.575	V	2, 3
Delta Vref/ Delta Ir	Reverse Breakdown Voltage Change with Current	20uA ≤ Ir ≤ 1mA			-1.0	1.0	mV	1
		30uA ≤ Ir ≤ 1mA			-1.5	1.5	mV	2, 3
		1mA ≤ Ir ≤ 20mA			-10.0	10.0	mV	1
		1mA ≤ Ir ≤ 20mA			-20.0	20.0	mV	2, 3
Vf	Forward Bias Voltage	If = 2mA			-1.0	-0.4	V	1
Tc	Temperature Coefficient		1			50	ppm/C	2, 3

Note 1: The average temperature coefficient is defined as the maximum deviation of reference voltage at all measured temperatures between the operating Tmax and Tmin, divided by Tmax - Tmin. The measured temperatures are -55 C, -40 C, 0 C, 25 C, 70 C, 85 C and 125 C.

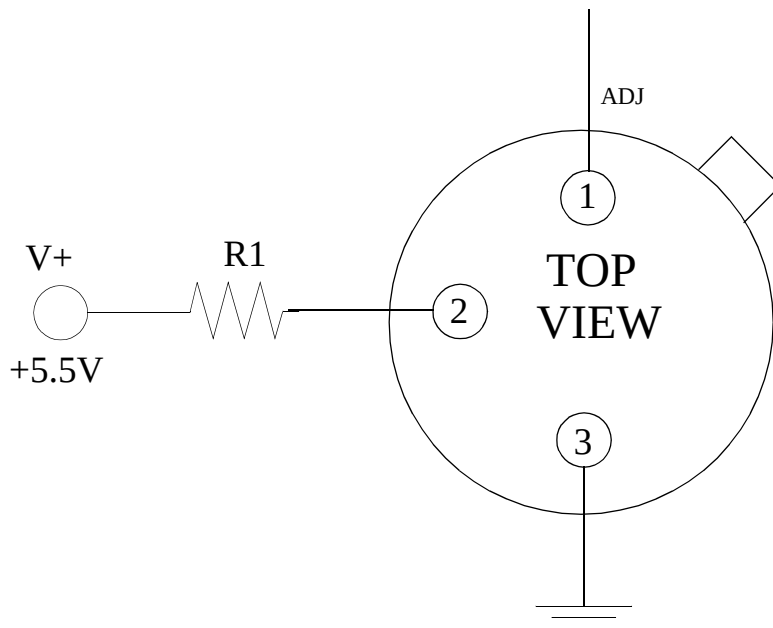

Graphics and Diagrams

GRAPHICS#	DESCRIPTION
05886HRB2	METAL CAN, T0-46, 2LD, .100 DIA P.C. (H) (B/I CKT)
H02ARE	METAL CAN, T0-46, 2LD, .100 DIA P.C. (H) (P/P DWG)
P000364A	METAL CAN (H-2.5), T0-46, 2 LEAD (PINOUT)

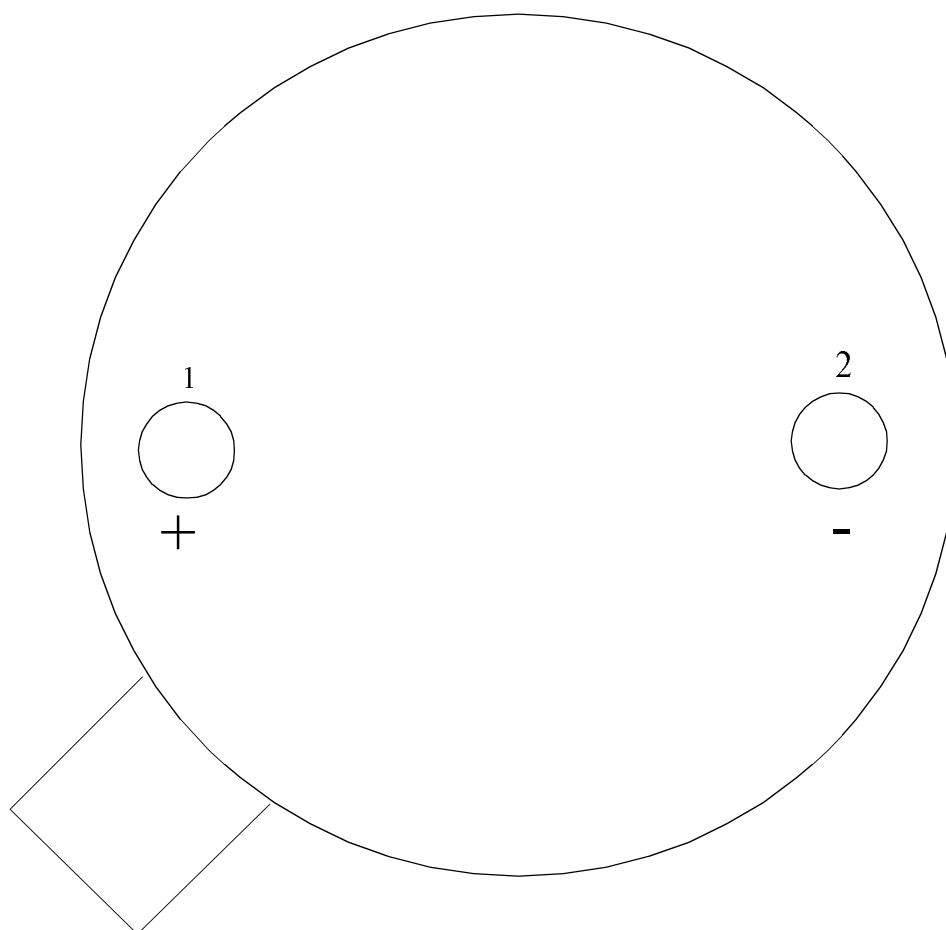
See attached graphics following this page.

1. GENERIC - INDUSTRY TYPE DEVICES THAT MAY BE USED WITH THIS CIRCUIT SHALL BE AS SPECIFIED IN NSC BURN-IN CIRCUIT LIST R512B-04.
2. ALL 1/4 AND 1/2 WATT RESISTORS SHALL BE METAL FILM. ALL 1, 2, AND 3 WATT RESISTORS SHALL BE WIRE WOUND. TOLERANCE SHALL BE +/-5% UNLESS OTHERWISE SPECIFIED.
3. ALL VOLTAGES SPECIFIED SHALL BE MEASURED AT THE "DEVICE UNDER TEST" PIN AND SHALL BE MINIMUM VALUES UNLESS OTHERWISE SPECIFIED.
4. WHEN APPLICABLE, CLOCK PULSES SPECIFIED SHALL HAVE 50% DUTY CYCLE.
5. THIS DRAWING COMPLIES WITH MIL-PRF-38535, WHEN APPLICABLE.

ECN	REV	APPROVALS	DATE
	A1	R Wallace	10/21/87
	B1	P.Reid	2/13/92
	B2	J. GOMEZ	10/27/98

[illegible]

BURN-IN CIRCUIT							SH	OF
CUSTOMER		PACKAGE TYPE H03		MIL	NSC	NOTE 7	TEST CONDITION	1
ORIGINATOR J.GOMEZ	DATE 10/27/98	CHECKED BY		DATE	DRAWING NUMBER 05886HR		REV	B2



LM185H-2.5
2 - LEAD TO-46
CONNECTION DIAGRAM
BOTTOM VIEW
P000364A



National Semiconductor™
MIL/AEROSPACE OPERATIONS
2900 SEMICONDUCTOR DRIVE
SANTA CLARA, CA 95050

Revision History

Rev	ECN #	Rel Date	Originator	Changes
0A0	M0003214	02/11/99	Rose Malone	Archive RETS185X-2.5, Rev. 0C. Update MDS MNLM185BY-X-2.5, Rev. 0AL to MNLM185BY-2.5-X, Rev. 0A0, Fully Released MDS. Updated Discription, Features and Absolute section. Changed nomenclature, verified NSID. Deleted Subgroup 1 from Tc electrical.