
PF0313 Series

MOS FET Power Amplifier Module for VHF Band

HITACHI

ADE-208-342A (Z)

2nd. Edition

July 1996

Features


- Small package: $30 \times 10 \times 5.9$ mm
- Low operation voltage: 7 W at 7.2 V
- High efficiency: 55% Typ
- Low power control current: 0.5 mA Max

Ordering Information

Type. Name	Operating frequency
PF0313	135 to 150 MHz
PF0314	150 to 175 MHz

Pin Arrangement


• RF-J



- 1: Pin
- 2: V_{PC}
- 3: V_{DD}
- 4: Pout
- 5: GND (Flange)

PF0313 Series

Internal Diagram and External Circuit

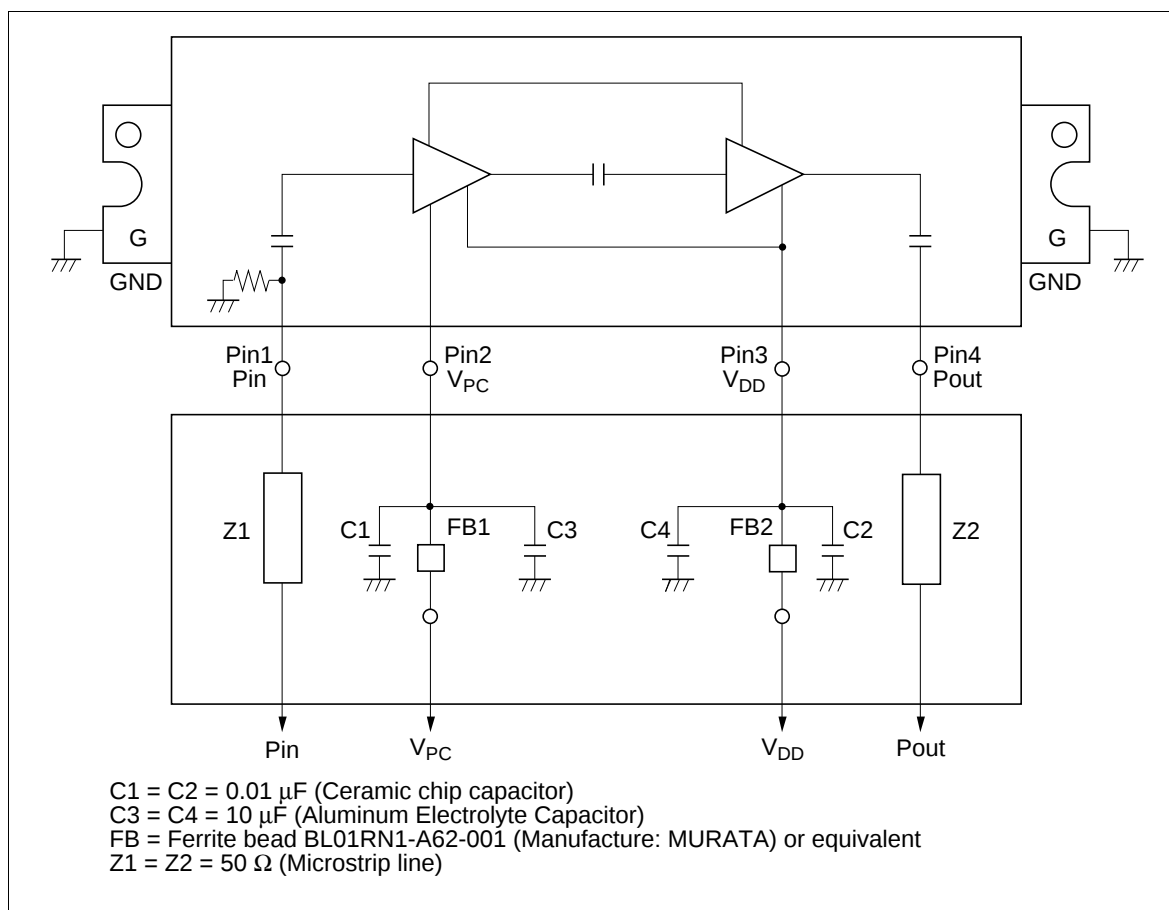

Absolute Maximum Ratings (T_c = 25°C)


Item	Symbole	Rating	Unit
Supply voltage	VDD	17	V
Supply current	IDD	3	A
PC voltage	VPC	7	V
Input power	Pin	100	mW
Operating case temperature	T _c (op)	-30 to +100	°C
Storage temperature	T _{stg}	-40 to +110	°C

PF0313 Series

Electrical Characteristics (T_c = 25°C)

Item	Symbol	Min	Typ	Max	Unit	Test Condition
Drain cutoff current	IDS	—	—	100	μA	VDD = 17 V, VPC = 0 V, RL = Rg = 50 Ω,
Total efficiency	η _T	45	55	—	%	Pin = 50 mW, VDD = 7.2 V,
2nd harmonic distortion	2nd H.D.	—	−25	−20	dBc	Pout = 7 W (at VPC controlled),
3rd harmonic distortion	3rd H.D.	—	−35	−30	dBc	RL = Rg = 50 Ω, Tc = 25°C
4th harmonic distortion	4th H.D.	—	−40	−30	dBc	
Input VSWR	VSWR (in)	—	1.5	3.0	—	
Output power (1)	Pout (1)	7	8	—	W	Pin = 50 mW, VDD = 7.2 V, VPC = 6 V, RL = Rg = 50 Ω
Output power (2)	Pout (2)	4	5	—	W	Pin = 50 mW, VDD = 6 V, VPC = 5.5 V, RL = Rg = 50 Ω
Load VSWR tolerance	—	No degradation			—	Pin = 50 mW, VDD = 15 V, Pout ≤ 7 W, (at VPC controlled), Output VSWR = 6:1 All phases
Stability	—	No parasitic oscillation			—	Pin = 50 mW, VDD = 6 to 15 V, Pout ≤ 7 W, (at VPC controlled), Output VSWR = 3:1 All phases



Mechanical Characteristics

Item	Measuring Conditions	Spec
Torque for screw up the heatsink flange	M2.6 Screw Bolts	1.5 to 3.5 kg•cm
Warp size of the heatsink flange: S		S = 0
		+0.1/−0 mm


PF0313 Series

Characteristics Curve

PF0313

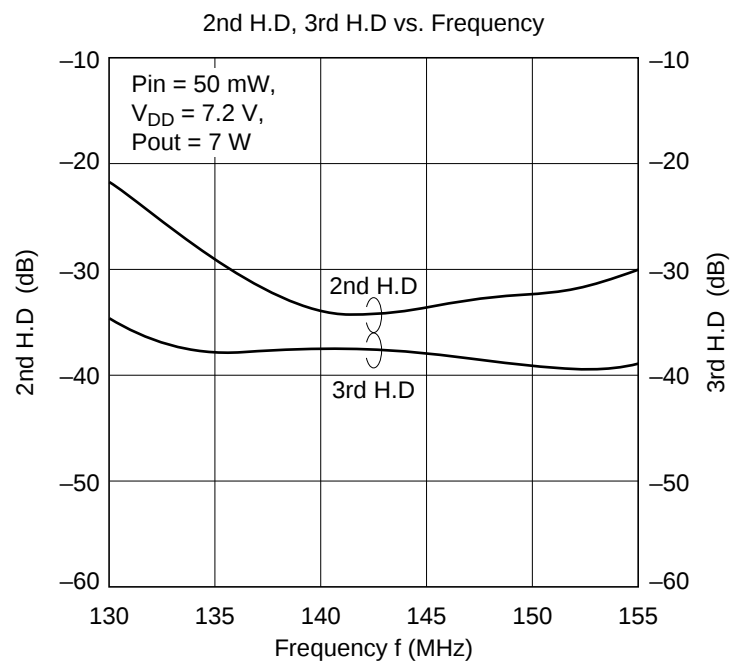
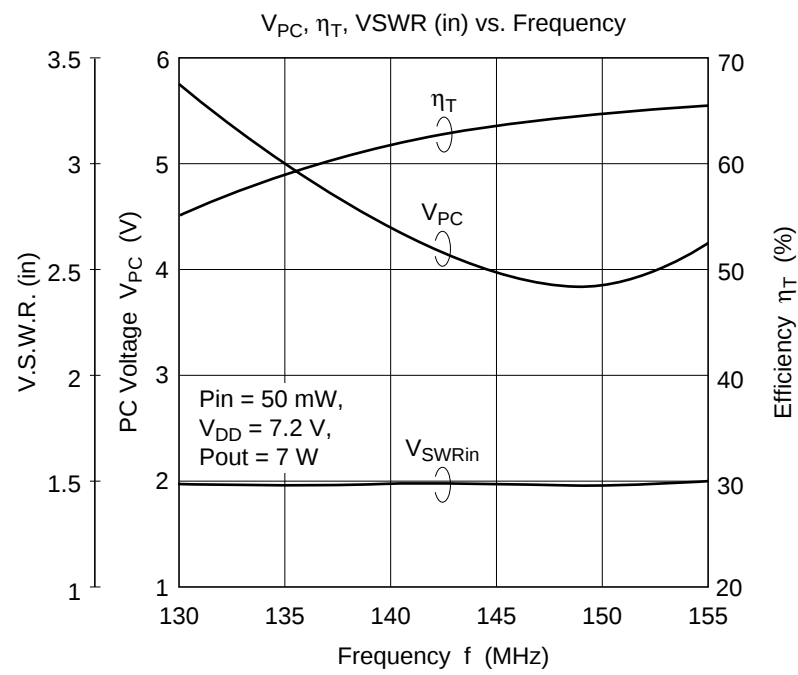


PF0313 (cont)


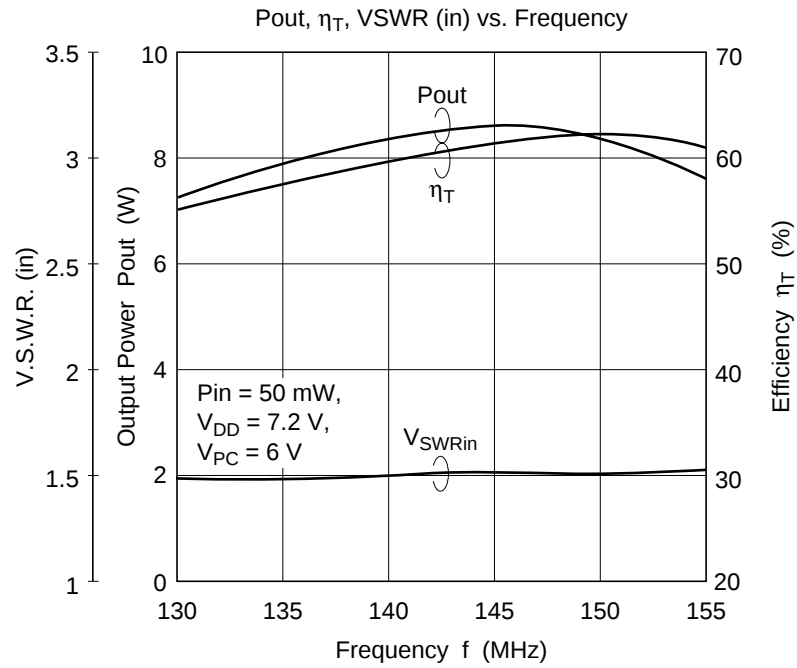


PF0313 Series

PF0313 (cont)

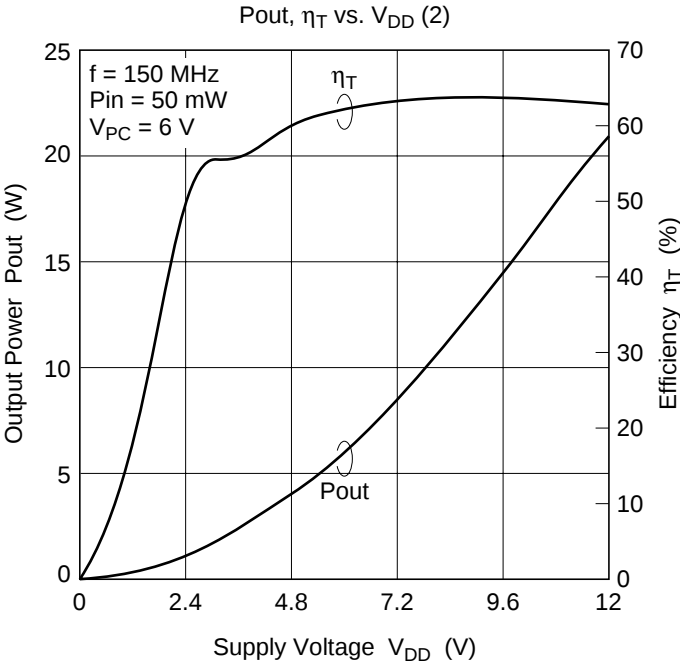
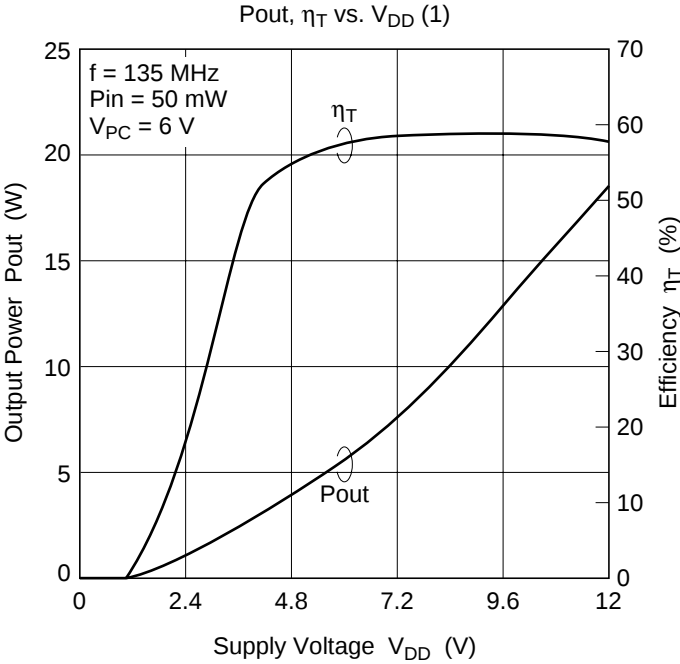


PF0313 (cont)

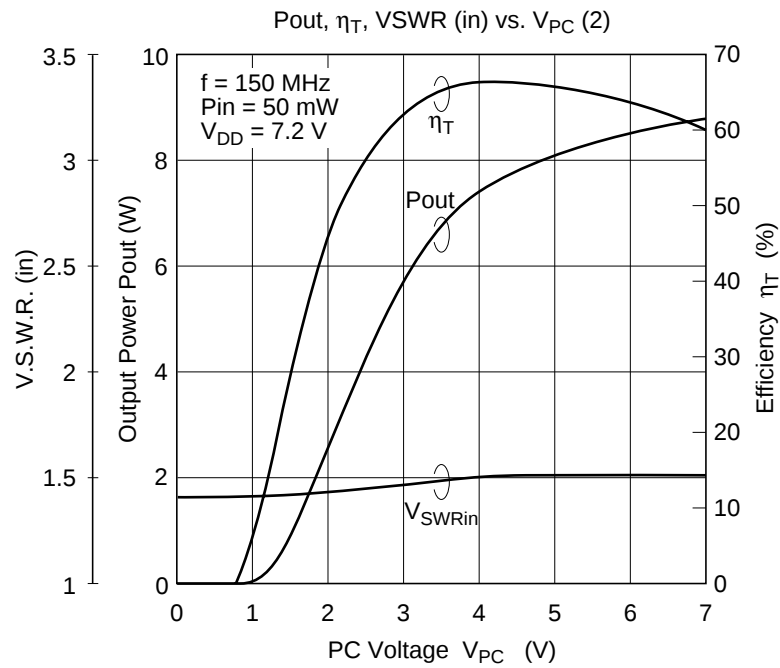
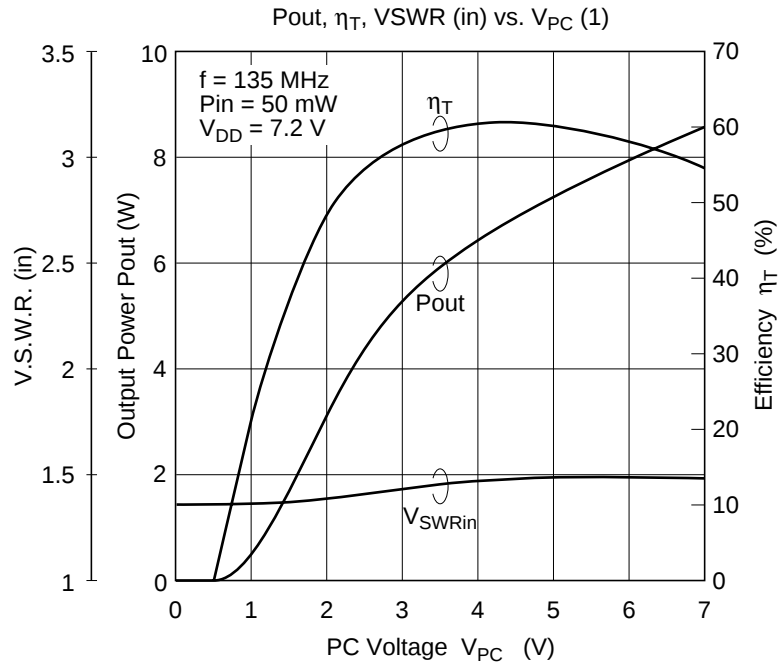


PF0313 Series

PF0313 (cont)

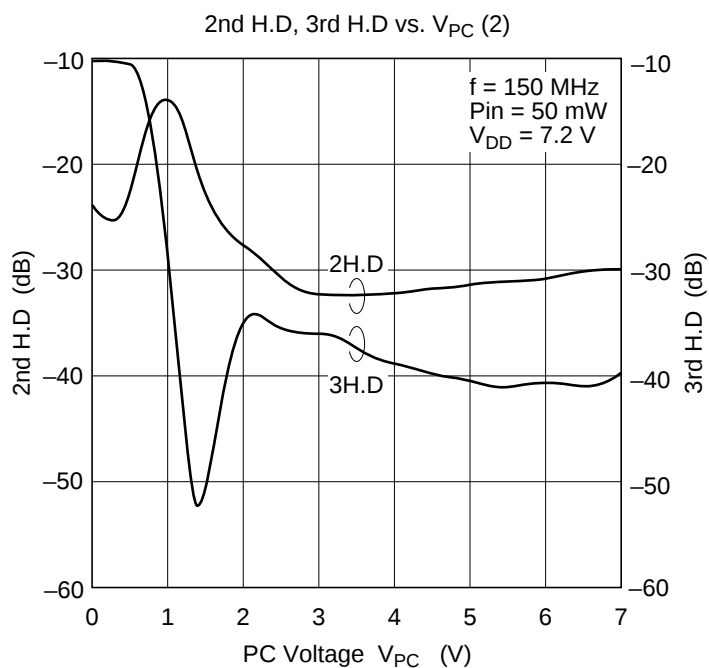
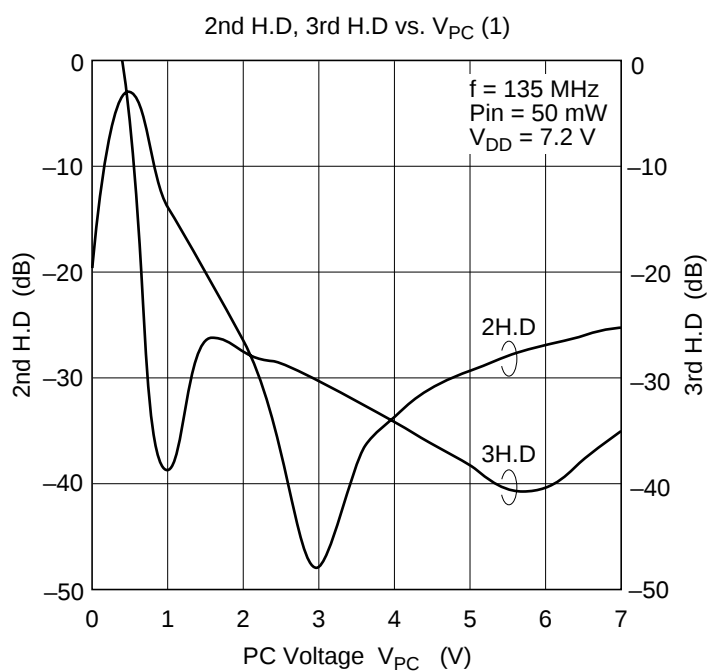


PF0313 (cont)

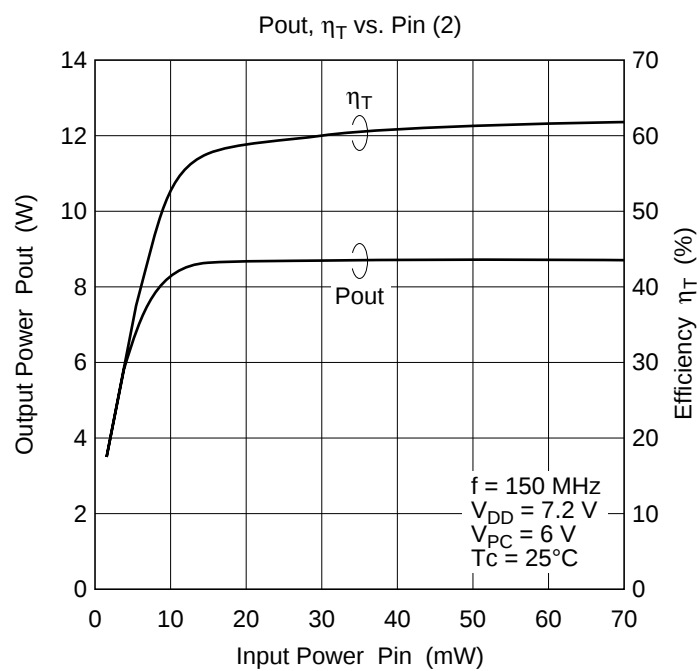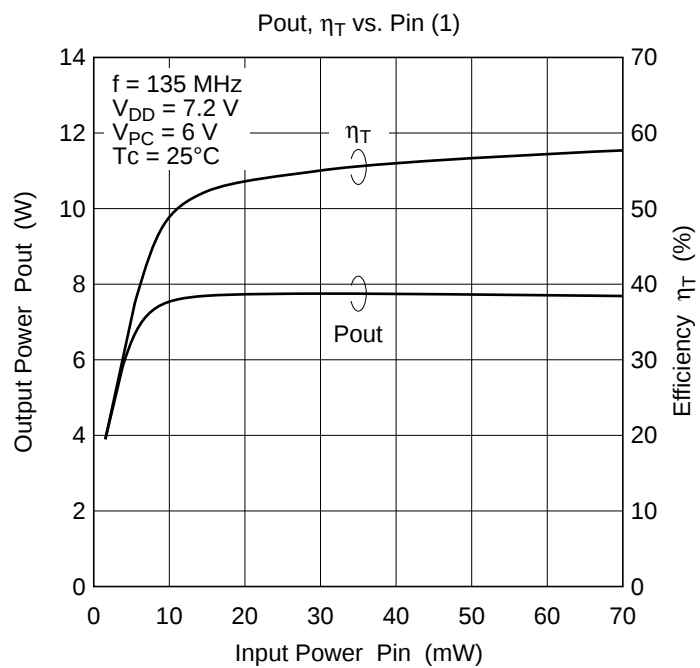


PF0313 Series

PF0314

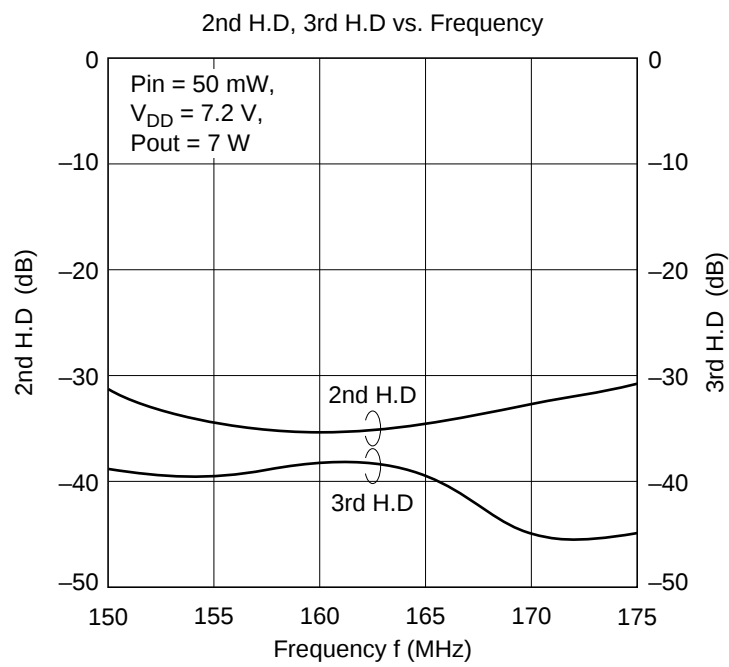
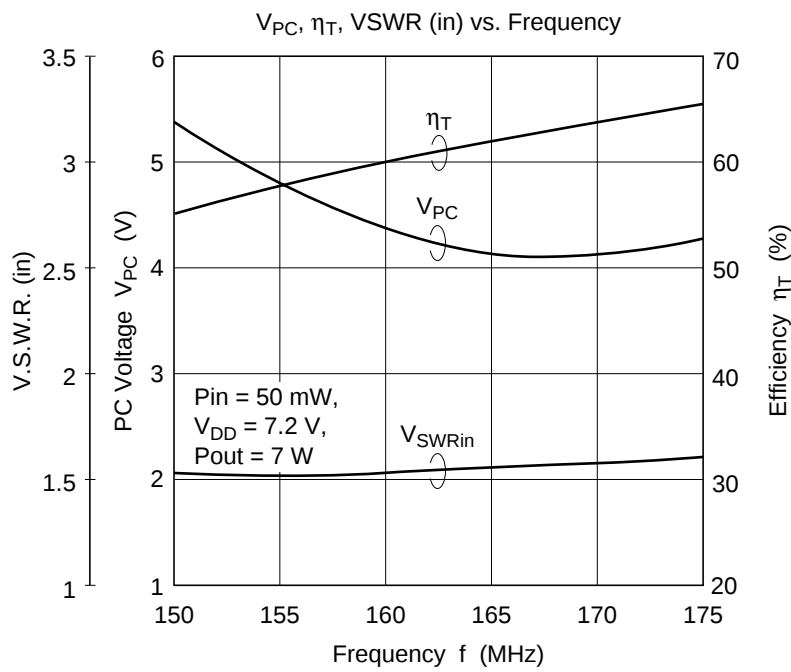


PF0314 (cont)


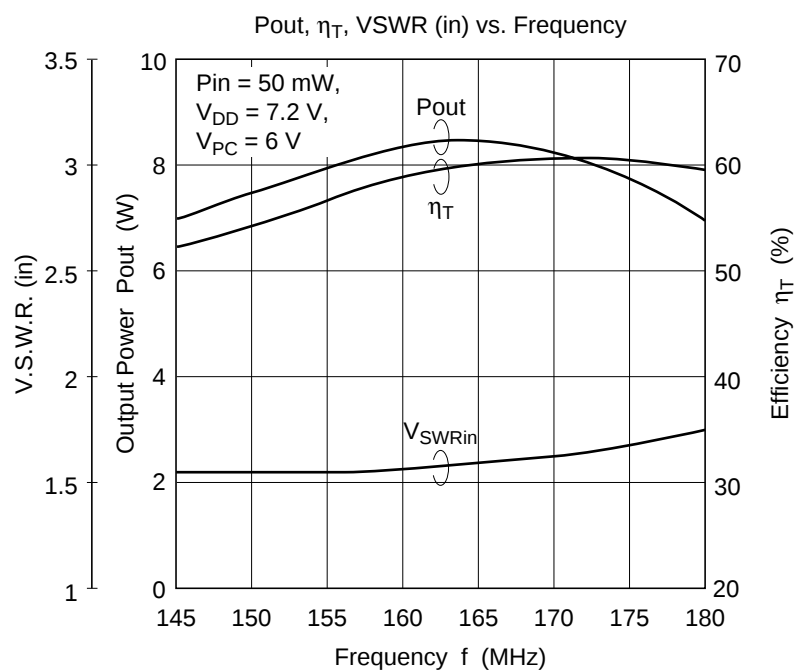


PF0313 Series

PF0314 (cont)

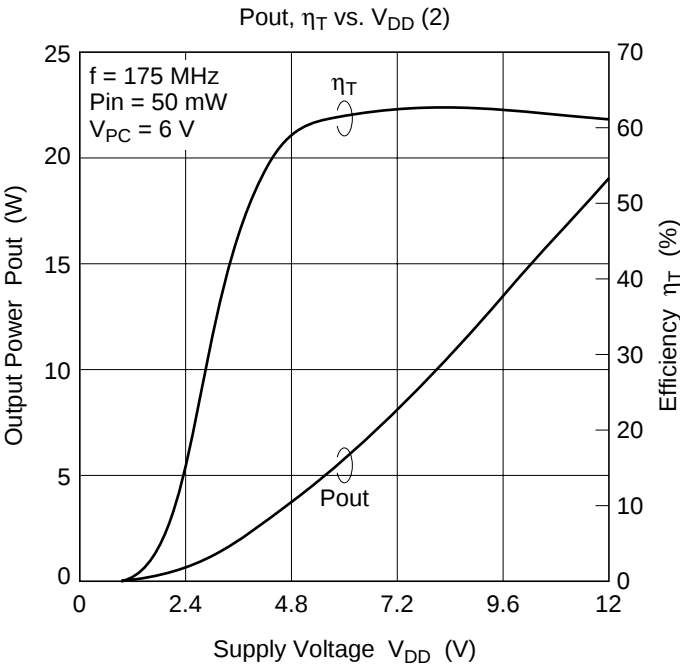
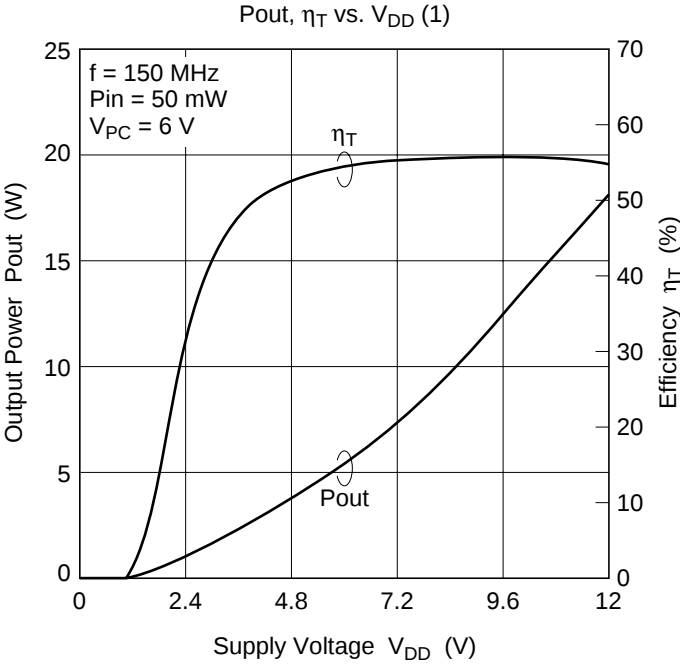


PF0314 (cont)

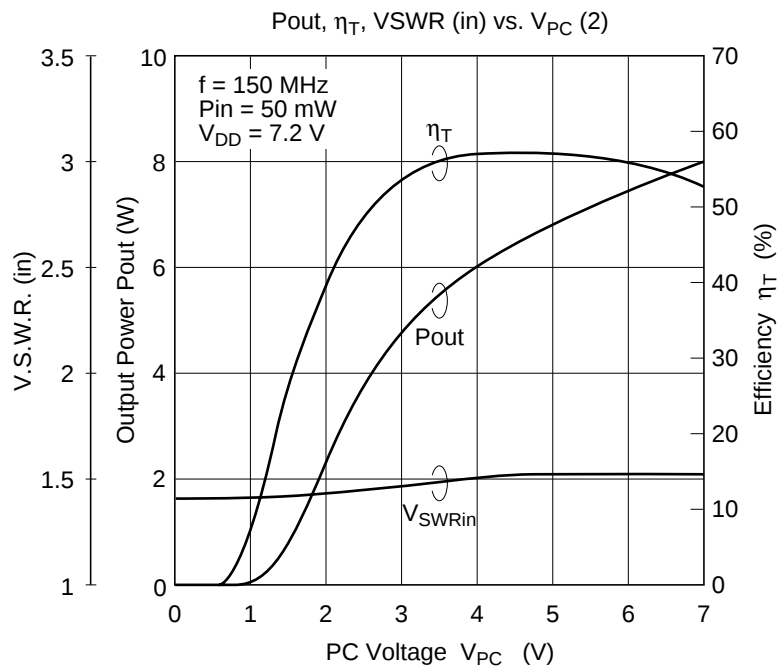
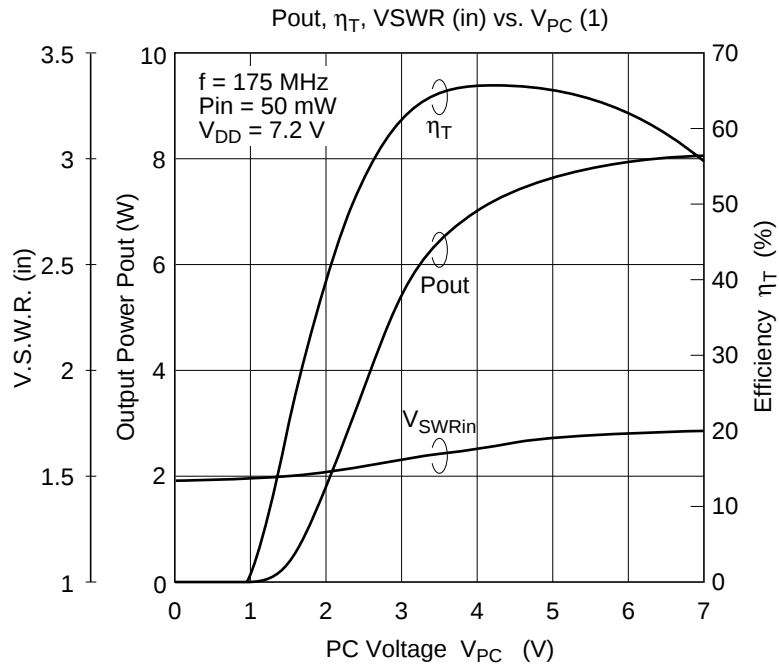


PF0313 Series

PF0314 (cont)

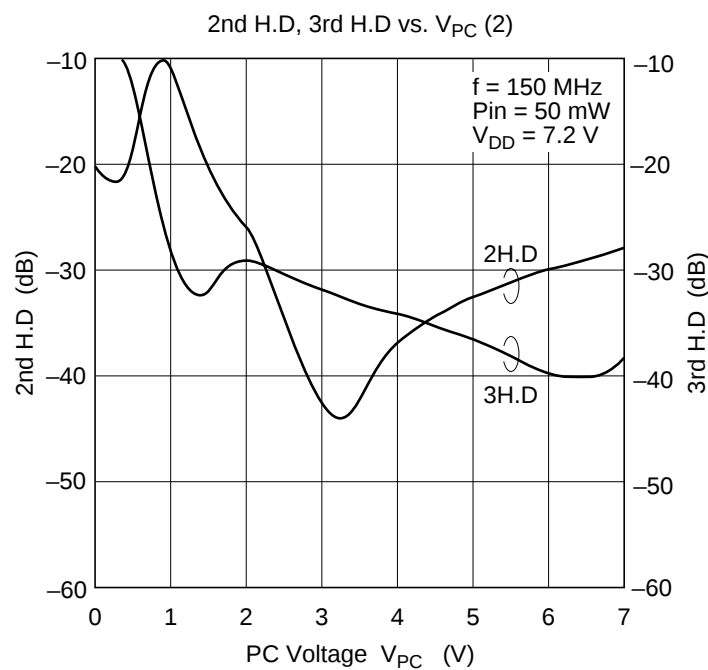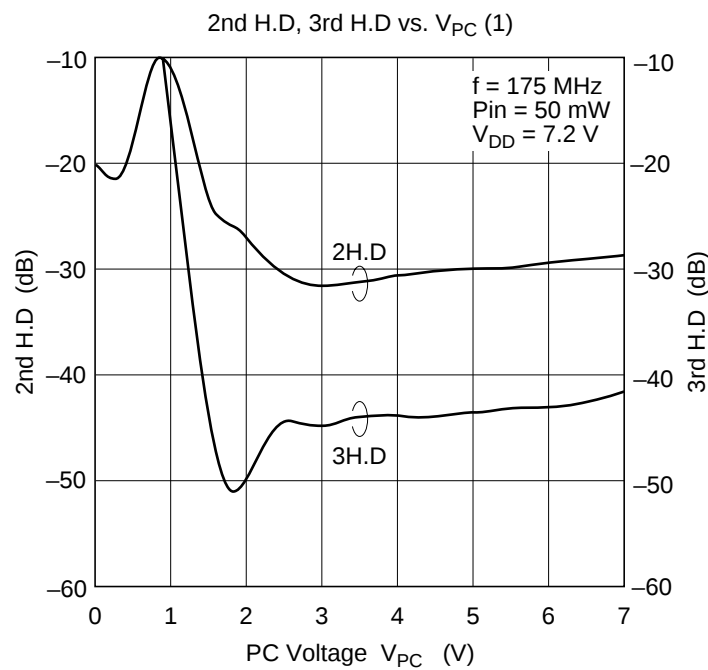



PF0314 (cont)

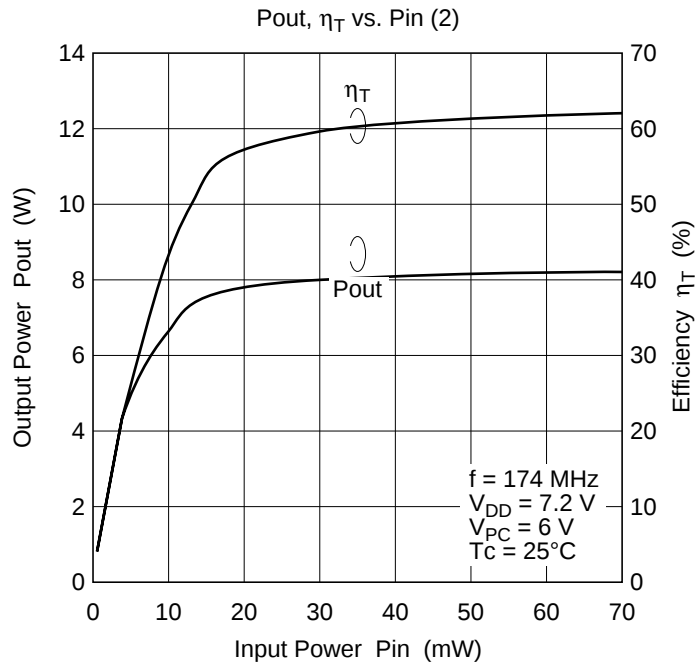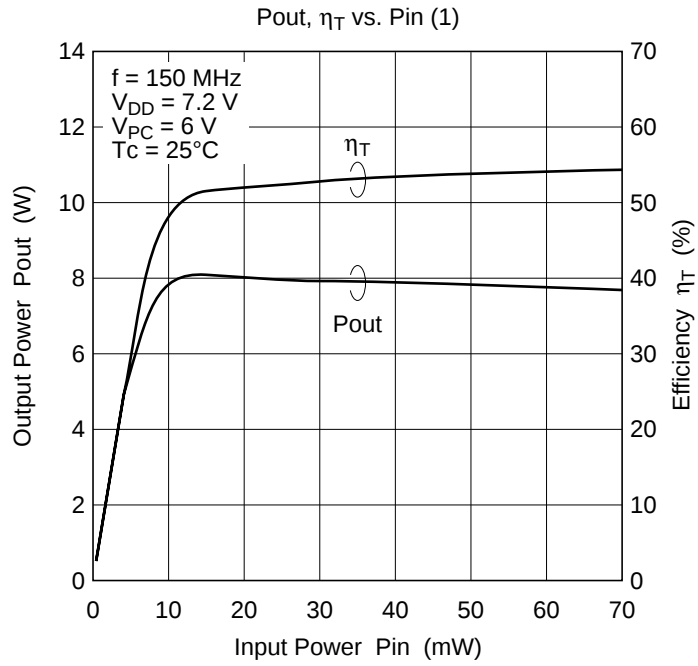

PF0313 Series

Package Dimensions

Unit: mm

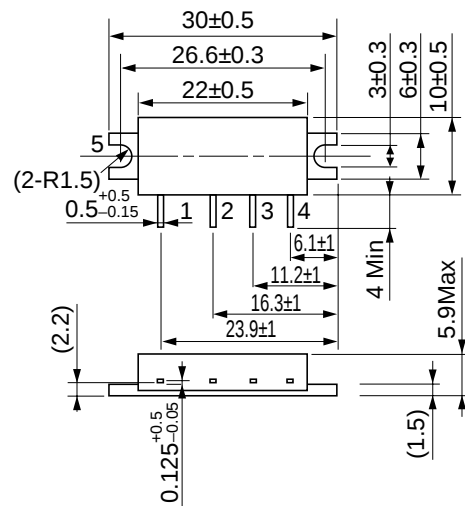

Hitachi code	RF-J
EIAJ code	—
JEDEC code	—