

Surface Mount Clock Oscillators

1.0MHz to 100.0MHz

**ELECTRICAL SPECIFICATIONS**

Operating Temperature: 0°C to +70°C (-40°C to +85°C optional for .005% ("A") and .01% ("B") Stability's).

Frequency Stability: ±.01% Standard (.0025% and .005% optional).

Input Voltage: +5.0VDC ±0.5V.

Enable Input Voltage: 2.2V minimum.

Disable Input Voltage: 0.8V maximum.

Output Load: 50pF or 10 TTL loads from 1.0 to 40.0MHz, 15pF or 10 TTL loads from 40.1 to 100.0MHz.

MECHANICAL SPECIFICATIONS

Marking Ink: Epoxy, solvent resistant.

FEATURES

- HCMOS/TTL compatible.
- Enabled output optional.
- Industrial temperature optional.

Hermetically Sealed Package: Leak rate less than 2×10^{-8} atmosphere cc/sec. of helium.

Terminal Solderability: A minimum of 95% coverage after solder dip.

ENVIRONMENTAL SPECIFICATIONS

Temperature Cycle: -55°C to +85°C, 3 cycles.

Shock: 1000g, 0.35 millisecond, 1/2 sine wave, 3 shocks each plane.

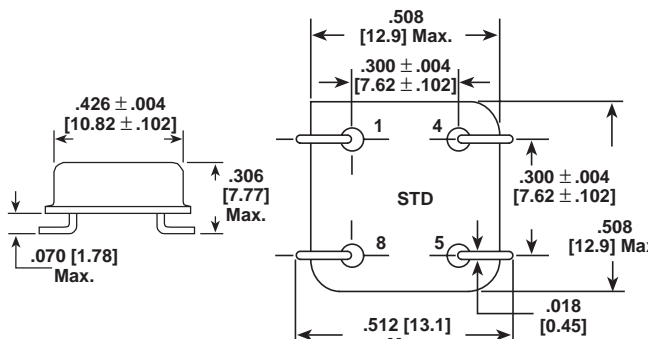
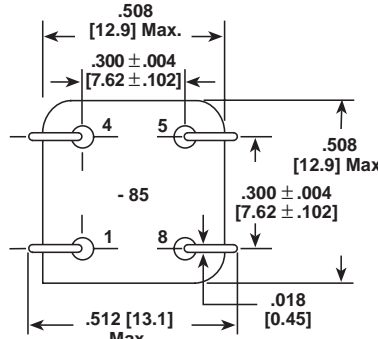
Vibration: .06 D.A., 10 - 55Hz, 20g, 55 - 200Hz.

Humidity: 85% relative humidity at 85°C, 240 hours.

STANDARD ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE (MHz)	INPUT CURRENT (mA) (Max.)	WAVEFORM SYMMETRY 2.5 or 50%Vdd	RISE AND FALL TIME (nS) (Typ. Max.)	"ZERO" LEVEL 10%Vdd (Typ. Max.)	"ONE" LEVEL 90%Vdd (Typ. Min.)
1.0 to 23.999	20	40/60	5/10	0.1/0.5	5.0/4.5
24.0 to 50.0	30	40/60	5/10	0.1/0.5	5.0/4.5
50.001 to 70.0	40	40/60	5/10	0.1/0.5	5.0/4.5
70.001 to 100.0	60	40/60	5/10	0.1/0.5	5.0/4.5

DIMENSIONAL CONFIGURATIONS [Numbers in brackets indicate millimeters]

Standard PIN Orientation		- 85 PIN Orientation	
			
STD		- 85	
PIN		CONNECTION	
1		N.C. or E/D	
4		Ground	
5		Output	
8		+ 5VDC	
ENABLE/DISABLE FUNCTION			
*Pin 1 E/D		Pin 5 Output	
Open		Active	
High (1)		Active	
Low (0)		High Z	

*An internal pull-up resistor is connected to Pin 1 allowing active output if Pin 1 is left open.

*An internal pull-up resistor is connected to Pin 1 allowing active output if Pin 1 is left open.

HOW TO ORDER

XOSM-52 MODEL	B FREQUENCY STABILITY	R OTR	E ENABLE/DISABLE	PIN ORIENTATION	40M FREQUENCY/MHz
	AA = .0025% (25PPM) A = .005% (50PPM) B = .01% (100PPM) Standard	Blank = 0°C to +70°C R = -40°C to +85°C	Blank = Pin 1 open E = Disable to Tristate	Blank = Standard - 85 = 90° Orientation	