
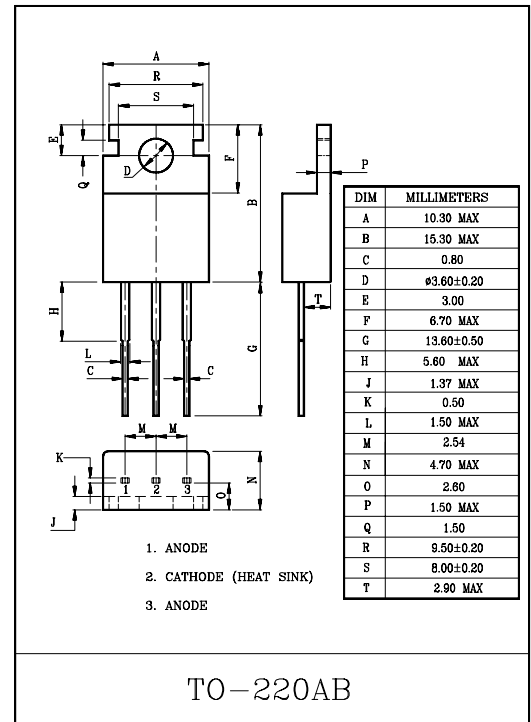


SWITCHING TYPE POWER SUPPLY APPLICATION.
CONVERTER & CHOPPER APPLICATION.

FEATURES

- Average Output Rectified Current : $I_O=15A(T_c=117^\circ C)$.
- Repetitive Peak Reverse Voltage : $V_{RRM}=45V$.
- Fast Reverse Recovery Time : $t_{rr}=35nS$.
- Low Peak Forward Voltage : $0.55V$.(Typ)

POLARITY

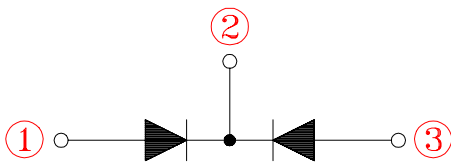

MAXIMUM RATINGS ($T_a=25^\circ C$)

| CHARACTERISTIC | SYMBOL | RATING | UNIT |
|--|-----------|-----------|------------|
| Repetitive Peak Reverse Voltage | V_{RRM} | 45 | V |
| Average Output Rectified Current ($T_c=117^\circ C$) (Rated V_R) (Note) | I_O | 15 | A |
| Peak One Cycle Surge Forward Current (Non-Repetitive 60Hz) | I_{FSM} | 150 | A |
| Junction Temperature | T_j | -40 ~ 150 | $^\circ C$ |
| Storage Temperature Range | T_{stg} | -55 ~ 150 | $^\circ C$ |

Note : average forward current of centertap full wave connection.

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ C$)

| CHARACTERISTIC | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|--|---------------|------------------------------|------|------|------|--------------|
| Peak Forward Voltage (Note) | V_{FM} | $I_{FM}=7.5A$ | - | 0.55 | 0.58 | V |
| Repetitive Peak Reverse Current (Note) | I_{RRM} | $V_{RRM}=\text{Rated}$ | - | - | 0.5 | mA |
| Reverse Recovery Time (Note) | t_{rr} | $I_F=1.0A, di/dt=-50A/\mu S$ | - | - | 35 | nS |
| Thermal Resistance (Note) | $R_{th(j-c)}$ | Juction to Case | - | - | 3.0 | $^\circ C/W$ |

Note : A value of one cell

B15A45V

