

AP1053 10 TO 1000 MHz TO-8 CASCADABLE AMPLIFIER

Typical Values

Low Noise	1.5 dB
High Output Level	+23.0 dBm
High Second Order I.P.	+52.0 dBm
High Dynamic Range	94 dB
High Efficiency	
High Performance Thin Film	
Standard Size TO-8	

SPECIFICATIONS*

Parameter	Typical	Guaranteed	
		0 to 50° C	-55 to +85° C
Frequency (Min.)	10-1000 MHz	10-1000 MHz	10-1000 MHz
Small Signal Gain (Min.)			
10-450 MHz	10.5 dB	10.0 dB	9.0 dB
450-1000 MHz	11.0 dB	10.5 dB	10.0 dB
Gain Flatness (Max.)			
10-450 MHz	±0.2 dB	±0.4 dB	±0.5 dB
450-1000 MHz	±0.5 dB	±0.8 dB	±1.0 dB
Noise Figure (Max.)			
50-1000 MHz	1.5 [^] dB	2.5 [^] dB	3.0 [^] dB
SWR (Max.)	Input/Output	1.9:1	2.0:1
Power Output (Min.)			
@ 1dB comp.	+26.0† dBm	+25.0† dBm	+24.5† dBm
DC Current (Max.)	100 mA	110.0 mA	115.0 mA

* Measured in a 50-ohm system at +15 Vdc unless otherwise specified.
[^] 2.0 dB higher below 200 MHz. † 2.0 dBm lower below 50 MHz.

INTERMODULATION PERFORMANCE

Typical @ 25° C	+12 Volts	+15 Volts
Second Order Harmonic Intercept Point	+61 dBm	+64 dBm
Second Order Two Tone Intercept Point	+55 dBm	+58 dBm
Third Order Two Tone Intercept Point	+38 dBm	+39 dBm


ABSOLUTE MAXIMUM RATINGS

Storage Temperature	-62 to 125° C
Maximum Case Temperature	+125° C
Maximum DC Voltage	+17 Volts
Maximum Continuous RF Input Power	+17 dBm
Maximum Short Term Input Power (1 Minute Max.)	100 Milliwatts
Maximum Peak Power (3 μsec Max.)	0.5 Watt
Burn-in Temperature	+100° C
Thermal Resistance¹ (θjc)	+23° C/Watt
Junction Temperature Rise Above Case (Tjc)	+34.2° C

¹ Thermal resistance is based on total power dissipation.


AP1053

TO-8 Package for Amplifiers

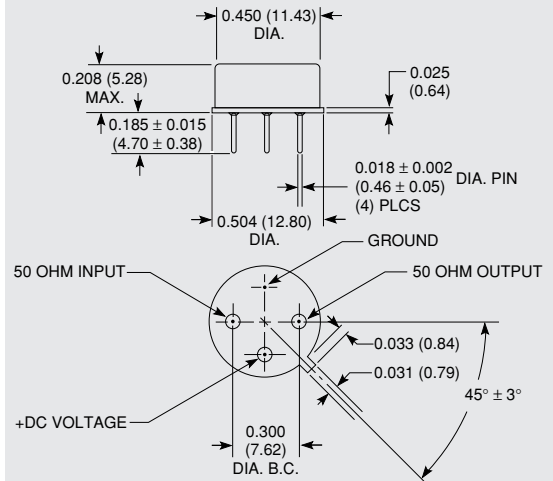

APS1053

SMT0-8 Package for Amplifiers






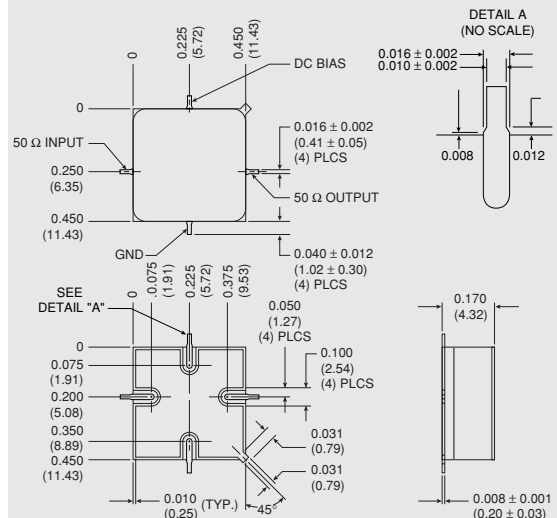


DIMENSIONS ARE IN INCHES (MILLIMETERS)



TYPICAL PERFORMANCE

TYPICAL AUTOMATIC TEST DATA

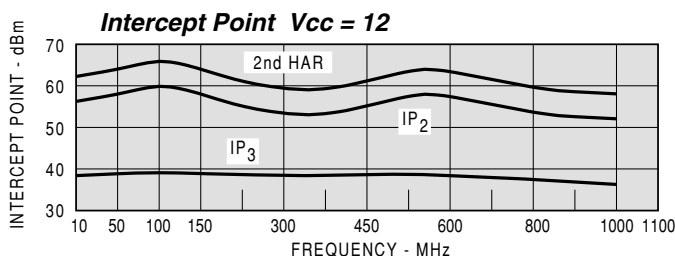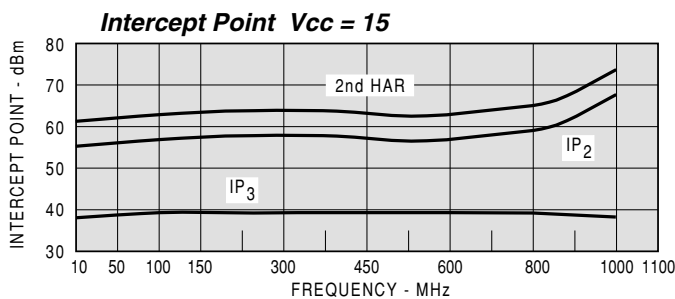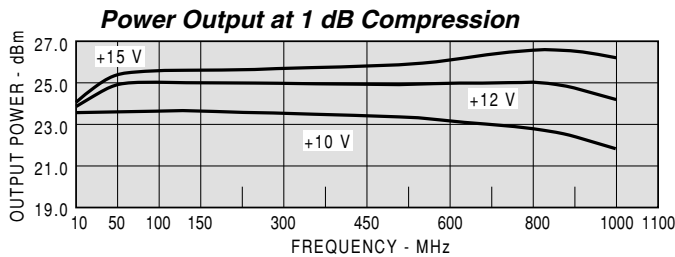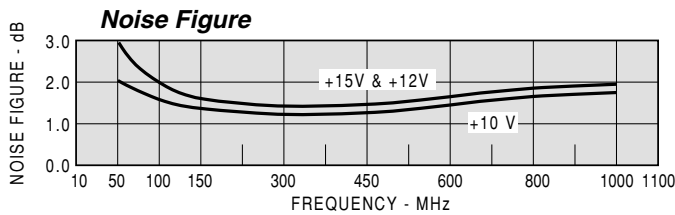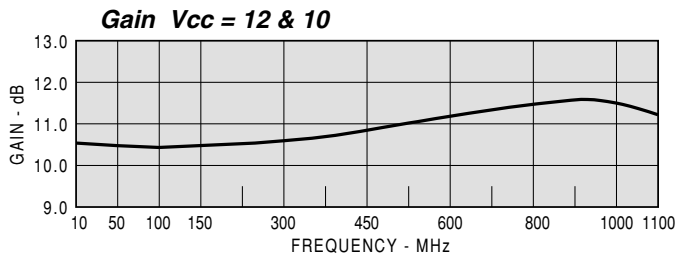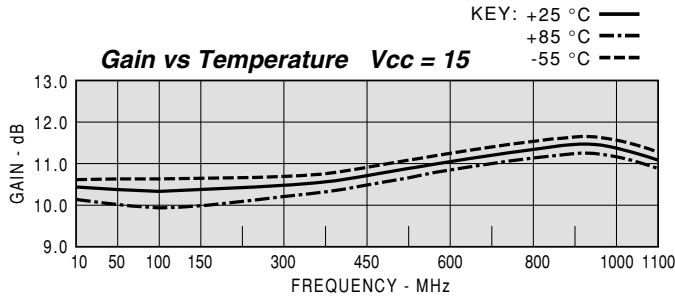

Model: AP1053		Vcc= +15V				Icc= 105.37	
FREQ	SWR	SWR	GAIN	PHASE	DELAY	REV/ISO	
MHZ	IN	OUT	DB	DEG	NSEC	DB	
10	1.66	1.18	10.50	-168	1.10	-17.8	
50	1.57	1.09	10.50	176	1.10	-17.8	
100	1.58	1.14	10.45	168	0.40	-17.8	
200	1.62	1.28	10.43	156	0.35	-17.9	
300	1.67	1.40	10.48	143	0.34	-17.9	
400	1.71	1.50	10.60	131	0.34	-18.0	
500	1.74	1.58	10.78	118	0.36	-17.9	
600	1.75	1.61	11.01	105	0.37	-17.7	
700	1.74	1.59	11.23	91	0.39	-17.5	
800	1.74	1.52	11.40	75	0.43	-17.5	
900	1.74	1.42	11.41	59	0.44	-17.4	
1000	1.79	1.37	11.26	42	0.46	-17.4	
1100	1.87	1.46	10.87	26	0.46	-17.7	

Model: AP1053		LINEAR S-PARAMETERS						Icc= 105.37	
FREQ.		S11		S21		S12		S22	
MHZ		MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
10		0.25	-19	3.35	-168.2	0.129	174.6	0.08	79.7
50		0.22	-5.7	3.35	175.6	0.129	172.9	0.04	74.5
100		0.22	-5.7	3.33	168.4	0.129	166.8	0.07	72.2
200		0.24	-8.8	3.32	155.7	0.127	154.7	0.12	62.7
300		0.25	-15.6	3.34	143.3	0.127	142.6	0.17	53.5
400		0.26	-25.6	3.39	131.0	0.126	131.2	0.20	44.7
500		0.27	-37.9	3.46	118.1	0.128	119.7	0.22	36.2
600		0.27	-54.0	3.55	104.8	0.130	108.1	0.23	27.6
700		0.27	-74.4	3.65	90.6	0.133	96.0	0.23	20.1
800		0.27	-99.3	3.72	75.1	0.134	83.1	0.21	15.8
900		0.27	-128.1	3.72	59.1	0.136	70.1	0.17	17.4
1000		0.28	-159.4	3.66	42.4	0.135	55.9	0.16	31.0
1100		0.30	169.2	3.50	25.8	0.131	42.3	0.19	47.1
1200		0.34	141	3.25	10.4	0.126	28.2	0.25	52.4

Model: AP1053		Vcc= +12V				Icc= 103.31	
FREQ	SWR	SWR	GAIN	PHASE	DELAY	REV/ISO	
MHZ	IN	OUT	DB	DEG	NSEC	DB	
10	1.64	1.14	10.59	-169	1.10	-17.4	
50	1.57	1.11	10.57	176	1.10	-17.2	
100	1.57	.16	10.53	168	0.41	-17.3	
200	1.62	1.27	110.50	155	0.36	-17.4	
300	1.67	1.39	10.54	143	0.34	-17.4	
400	1.72	1.48	10.65	131	0.35	-17.5	
500	1.76	1.54	10.82	118	0.36	-17.4	
600	1.77	1.57	11.03	104	0.37	-17.4	
700	1.77	1.55	11.24	90	0.40	-17.2	
800	1.76	1.49	11.39	74	0.43	-17.2	
900	1.77	1.44	11.37	58	0.45	-17.1	
1000	1.82	1.48	11.18	42	0.46	-17.3	
1100	1.91	1.65	10.78	25	0.46	-17.6	

Model: AP1053		LINEAR S-PARAMETERS						Icc= 103.31	
FREQ.		S11		S21		S12		S22	
MHZ		MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
10		0.24	-18.6	3.39	-168.5	0.135	176.4	0.07	111.7
50		0.22	-5.3	3.38	175.5	0.137	172.8	0.05	129.7
100		0.22	-5.2	3.36	168.2	0.136	166.4	0.07	108.3
200		0.24	-8.4	3.35	155.4	0.135	153.6	0.12	83.2
300		0.25	-15.2	3.36	143.0	0.134	140.8	0.16	68.3
400		0.27	-25.4	3.41	130.5	0.133	128.7	0.19	57.0
500		0.28	-38.1	3.47	117.6	0.134	116.8	0.21	47.4
600		0.28	-54.7	3.56	104.1	0.136	104.7	0.22	39.0
700		0.28	-75.7	3.65	89.9	0.138	91.8	0.22	32.9
800		0.28	-101.2	3.71	74.4	0.138	78.4	0.20	31.4
900		0.28	-130.5	3.70	58.3	0.139	64.9	0.18	37.2
1000		0.29	-162.4	3.62	41.6	0.137	50.4	0.19	48.9
1100		0.31	166.2	3.46	25.0	0.132	36.7	0.25	56.0
1200		0.35	138.3	3.19	9.5	0.126	22.4	0.32	55.5

Model: AP1053		Vcc= +10V				Icc= 100.32	
FREQ	SWR	SWR	GAIN	PHASE	DELAY	REV/ISO	
MHZ	IN	OUT	DB	DEG	NSEC	DB	
10	1.64	1.15	10.58	-169	1.10	-17.1	
50	1.57	1.16	10.54	175	1.10	-17.0	
100	1.58	1.19	10.49	168	0.41	-17.0	
200	1.63	1.29	10.46	155	0.36	-17.1	
300	1.69	1.39	10.50	143	0.35	-17.2	
400	1.74	1.48	10.61	130	0.35	-17.2	
500	1.78	1.54	10.78	117	0.36	-17.2	
600	1.80	1.55	10.99	103	0.38	-17.1	
700	1.80	1.54	11.17	89	0.40	-17.0	
800	1.80	1.50	11.31	73	0.44	-17.0	
900	1.82	1.50	11.26	57	0.45	-17.0	
1000	1.88	1.60	11.03	40	0.46	-17.2	
1100	1.97	1.82	10.59	24	0.46	-17.5	