

- ◆ CMOS 2-Input Exclusive-OR Gate
- ◆ High Speed Operation $t_{pd}=5.85\text{ns}$ TYP
- ◆ Operating Voltage Range 2V~5.5V
- ◆ Low Power Consumption $1\mu\text{A}$ MAX

Applications

- Palmtops
- Digital Equipment

General Description

The XC74UL86AA is a 2-input CMOS exclusive-OR gate, manufactured using silicon gate CMOS fabrication.

CMOS low power circuit operation makes high speed LS-TTL operations achievable.

With a wave forming buffer connected internally, stabilized output can be achieved as the circuit offers high noise immunity.

As the XC74UL86AA is integrated into mini molded, SSOT-25 and SOT-25 packages, high density mounting is possible.

Features


High Speed Operation: $t_{pd}=5.85\text{ns}$ TYP

Operating Voltage Range: 2V~5.5V

Low Power Consumption: $1\mu\text{A}$ MAX

Space Saving Package: SSOT-25 and SOT-25

Pin Configuration

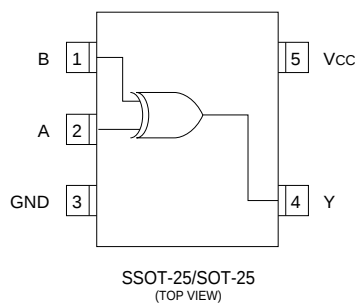

Function

INPUT		OUTPUT
A	B	Y
L	L	L
L	H	H
H	L	H
H	H	L

H=High level, L=Low level

Absolute Maximum Ratings

$T_a = -40^\circ\text{C} \sim 85^\circ\text{C}$

PARAMETER	SYMBOL	RATINGS	UNITS
Power Supply Voltage	VCC	-0.5 ~ +6.0	V
Input Voltage	VIN	-0.5 ~ +6.0	V
Output Voltage	VOU	-0.5 ~ VCC +0.5	V
Input Diode Current	I _{IK}	-20	mA
Output Diode Current	I _{OK}	±20	mA
Output Current	I _{OUT}	±25	mA
VCC ,GND Current	I _{CC} , I _{GND}	±50	mA
Continuous Total Power Dissipation	P _d	150	mW
Storage Temperature	T _{stg}	-65 ~ +150	°C

Note: Voltage is all Ground standardized.

Ordering Information

XC74UL xxxxxx
 ↑↑
 a b

DESIGNATOR	DESCRIPTION
a	Package Type N=SSOT-25 M=SOT-25
b	Device Orientation R=Embossed Tape (Orientation of Device:Right) L=Embossed Tape (Orientation of Device:Left)

DC Electrical Characteristics

PARAMETER	SYMBOL	CONDITIONS		Ta=25℃			Ta=-40~85℃		UNITS	
				VCC(V)	MIN	TYP	MAX	MIN		MAX
Input Voltage	VIH	2.0			1.5	-	-	1.5	-	V
		3.0			2.1	-	-	2.1	-	
		5.5			3.85	-	-	3.85	-	
	VIL	2.0			-	-	0.5	-	0.5	V
		3.0			-	-	0.9	-	0.9	
		5.5			-	-	1.65	-	1.65	
Output Voltage	VOH	2.0	VIN=VIH or VIL	IOH=-50μA	1.9	2.0	-	1.9	-	V
		3.0			2.9	3.0	-	2.9	-	
		4.5			4.4	4.5	-	4.4	-	
		3.0		IOH=-4mA	2.58	-	-	2.48	-	
		4.5		IOH=-8mA	3.94	-	-	3.80	-	
	VOL	2.0	VIN=VIH	IOL=50μA	-	-	0.1	-	0.1	V
		3.0			-	-	0.1	-	0.1	
		4.5			-	-	0.1	-	0.1	
		3.0		IOL=4mA	-	-	0.36	-	0.44	
		4.5		IOL=8mA	-	-	0.36	-	0.44	
Input Current	IIN	5.5	VIN=VCC or GND		-0.1	-	0.1	-1.0	1.0	μA
Quiescent Supply Current	ICC	5.5	VIN=VCC or GND. IOUT=0μA		-	-	1.0	-	10.0	

Switching Electrical Characteristics


PARAMETER	SYMBOL	C _L	V _{CC} (V)	CONDITIONS	Ta=25°C			Ta=-40~85°C		UNITS
					MIN	TYP	MAX	MIN	MAX	
Propagation Delay Time	t _{PLH}	15pF	3.3		-	4.4	11	1	13	ns
			5.0		-	3.3	6.8	1	8	
		50pF	3.3		-	6.1	14.5	1	16.5	ns
			5.0		-	4.4	8.8	1	10	
	t _{PHL}	15pF	3.3		-	4	11	1	13	ns
			5.0		-	2.9	6.8	1	8	
		50pF	3.3		-	5.6	14.5	1	16.5	ns
			5.0		-	4.1	8.8	1	10	
Input Capacitance	C _{IN}	-	5.0	V _{IN} =V _{CC} or GND	-	4	10	-	10	pF
Power Dissipation Capacitance	C _{pd}			No Load, f=1MHz	-	12	-	-	-	pF

tr=tf=3ns


Recommended Operating Conditions

PARAMETER	SYMBOL	V _{CC} (V)	CONDITIONS	UNITS
Supply Voltage	V _{CC}	-	2 ~ 5.5	V
Input Voltage	V _{IN}	-	0 ~ 5.5	V
Output Voltage	V _{OUT}	-	0 ~ V _{CC}	V
Operating Temperature	T _{opr}	-	-40 ~ +85	°C
Output Current	I _{OH}	3.0	-4	mA
		4.5	-8	
	I _{OL}	3.0	4	
		4.5	8	
Input Rise and Fall Time	tr, tf	3.3	0 ~ 100	ns/V
		5.0	0 ~ 20	

Waveforms

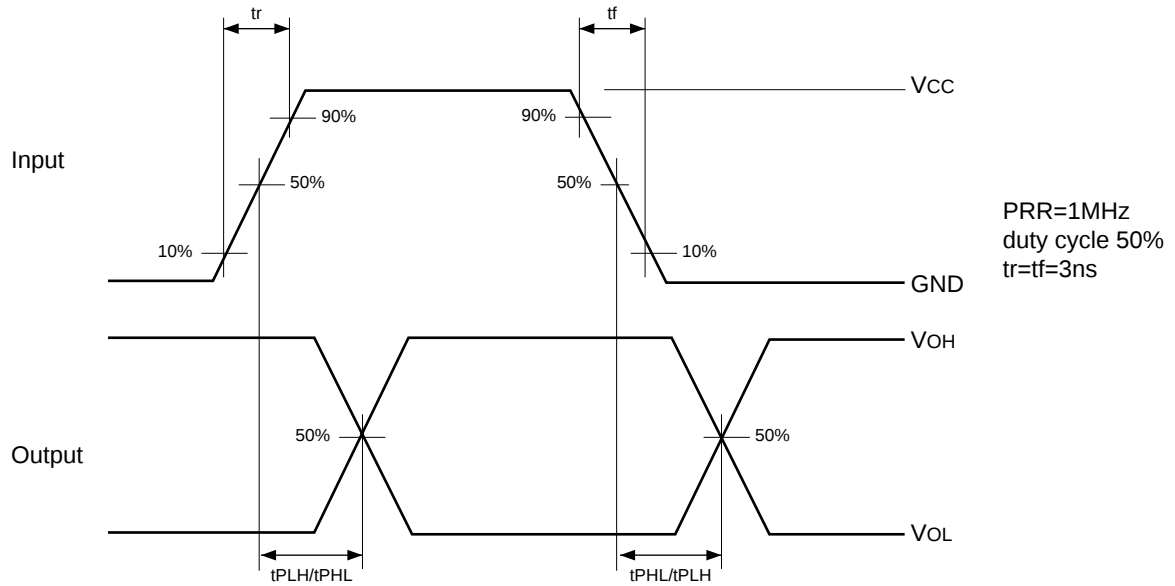

Typical Application Circuit

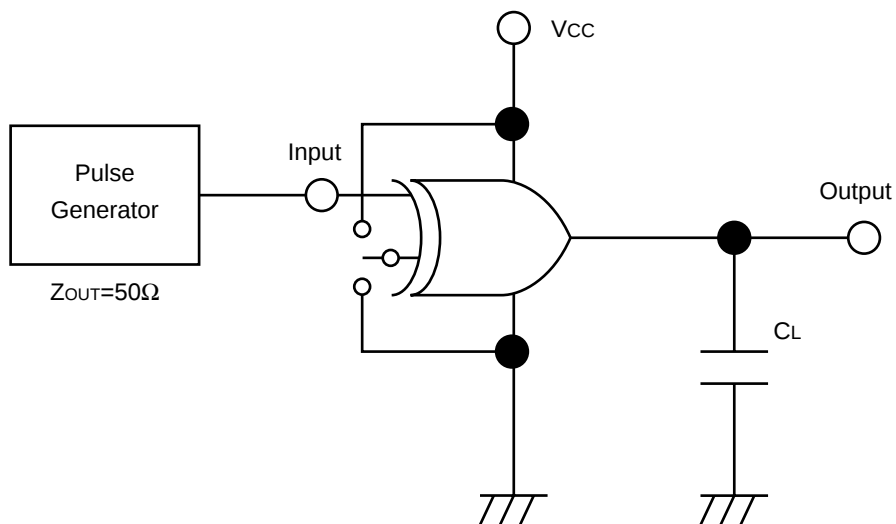

Note: open output when measuring supply current