



## 16-PORT 10-GbE/HIGIG2™ MULTILAYER SWITCH

### FEATURES

- Sixteen HiGig2™/HiGig™+/HiGig™/10-GbE/1-GbE ports
- Based on StrataXGS™ field-proven, robust architecture
- Integrated high-performance SerDes
  - Integrated XAUI™ SerDes for all 16 ports
  - Uses single SerDes lane per port at GbE speeds
- 196 Gbps switching capacity at line rate
- Support for eight classes of service (CoS) plus two additional classes for Flow Control and system management per port
- Support for deficit round robin, weighted round robin and strict priority scheduling
- Support for a cut-through switching mode
- Port trunking and remote mirroring support
- Fully integrated data and address memory on a single chip
- Advanced packet flow control
  - Head of line blocking prevention
  - Full-duplex flow control (802.3x)
- ContentAware™ network processing per port
  - Line rate multifield packet classification
  - Supports IEEE 802.1p, TOS/DiffServ, rate limiting, policing, priority tagging, and remapping
  - Extended security and ACL filtering
- Full IPv6 routing support
- Enhanced security and management capabilities
- Low power consumption


### SUMMARY OF BENEFITS

- High level of integration and low power consumption enable system vendors to build high-performance, high-port-density 10-Gigabit Ethernet switches in the same form factor as existing GbE solutions.
- Built-in, high-speed serial interfaces with integrated memory eases and accelerates system design, while reducing cost and conserving board space.
- Built-in Layer 3 routing support enables embedded switch to become an extension of the Enterprise Core network.
- Advanced load balancing and strong user isolation features facilitate the implementation of utility computing services.
- Integrated security features and enhanced management capabilities improve network reliability and lower cost of ownership for BCM56802-based solutions.
- Broadcom switch API compatibility enables software reuse and faster time-to-market.


### APPLICATIONS

- Embedded switch in next-generation 10-GbE Blade Servers
- 10-GbE/1-GbE switching engine in Advanced TCA Chassis platforms
- Multilayer switch in high-density 10-Gigabit Ethernet switches

**BCM56802 Block Diagram**

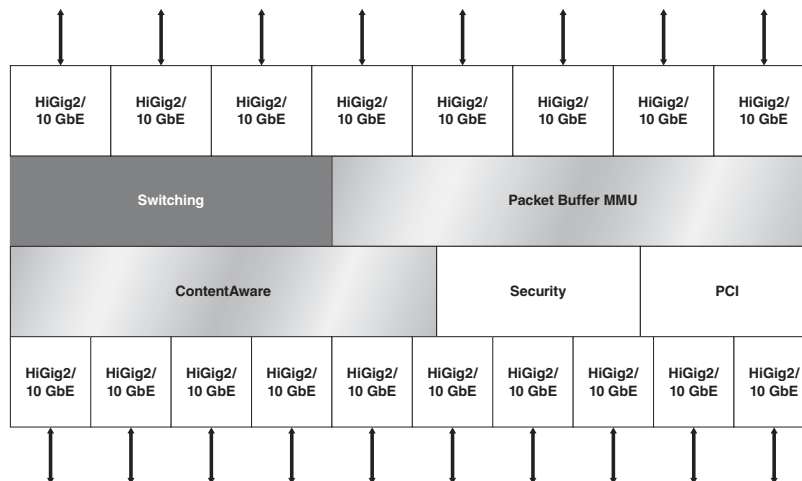

## OVERVIEW

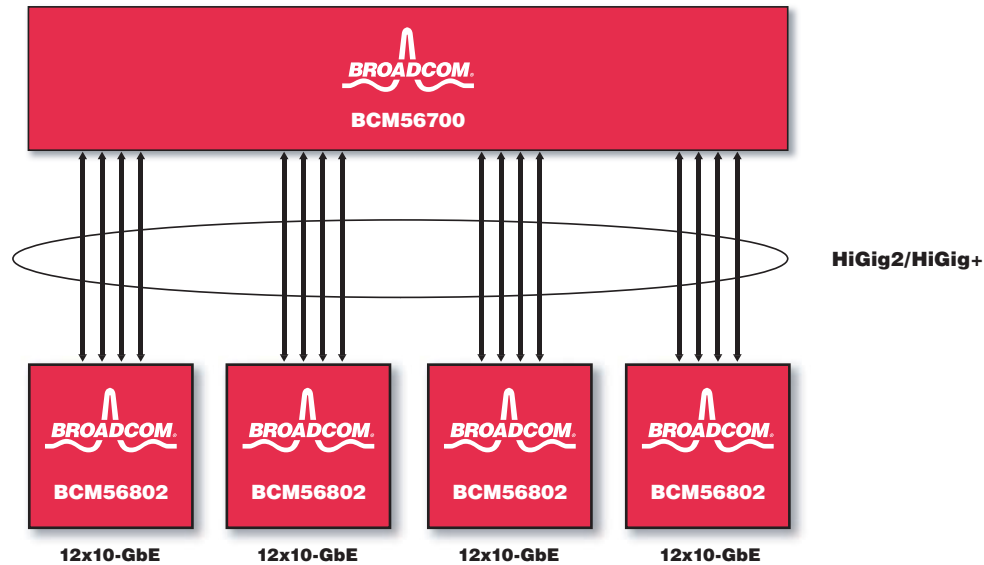

### 48-Port 10-GbE Switch with BCM56700 and BCM56802

The BCM56802 network switch is a high-density, 10-Gigabit Ethernet switching chip solution with 16 ports. All 16 ports can flexibly support HiGig2/HiGig+/HiGig/10-GbE/1-GbE. Additionally, the BCM56802 integrates all the SerDes required to interface with applicable copper and fiber physical fabrics.

The integrated SerDes functionality includes 10-Gbps XAUI and 1-Gbps SGMII PHY interfaces. The integrated SerDes complies with the CX-4 standard and PICMG3.1 standard, which ensures interoperability with Ethernet line cards in an Advanced TCA chassis.

With 192 Gbps of aggregate switching bandwidth, the BCM56802 represents the highest level of Ethernet switching integration in the industry. This integration allows embedded switching vendors to provide next-generation products at 10-GbE speeds, as well as an ideal fit into current design form factors. This capability has many benefits, including reducing vendor development cost and creating additional value in current generation systems through upgradability.

The BCM56802's low power dissipation simplifies board design and optimizes vendor board space.

The advanced ContentAware engine supports ToS/DiffServ, policy-based routing, priority tagging, and remapping. The advanced packet filtering and classification functions of the BCM56802 make it a seamless fit utility for computing applications where user segregation and network security is critical.

In addition, the BCM56802 provides advanced security features that improve network resiliency and reliability. Moreover, the BCM56802

features advanced load balancing functionality that uses flow information to provide high-percentage link utilization.

The BCM56802 supports L2 switching with 4K VLANs, IPv4, and IPv6 full routing functionality, enabling it to become a direct extension of the enterprise network. This provides additional customer value by eliminating the hardware and management costs of maintaining intermediate routers.

As the latest member of the StrataXGS switch family, the BCM56802 Software Development kit preserves software continuity with Gigabit Ethernet switches, reducing development cost and shortening the product time-to-market.

The BCM56802 implements congestion handling features such as Head-Of-Line blocking prevention and IEEE 802.3x flow control.

In addition to a 32-bit PCI interface used to communicate with a local CPU, the BCM56802 supports an I<sup>2</sup>C controller for communicating with external devices such as serial EEPROM, flash memories, and parallel port devices.

The BCM56802 relies on Broadcom's modular switching architecture to provide intelligent packet processing, network security and enhanced manageability at a low cost. The BCM56802 is an ideal solution for next-generation, high-speed embedded switching applications, such as Blade Servers and Advanced TCA computer platforms.

Together with the BCM56700 as a centralized fabric, the BCM56802 can also be used to build cost-effective, high-density 10GbE switches.

**Broadcom**<sup>®</sup>, the pulse logo, **Connecting everything**<sup>®</sup>, and the Connecting everything logo are among the trademarks of Broadcom Corporation and/or its affiliates in the United States, certain other countries and/or the EU. Any other trademarks or trade names mentioned are the property of their respective owners.

Connecting  
**everything**<sup>®</sup>



**BROADCOM CORPORATION**  
16215 Alton Parkway, P.O. Box 57013  
Irvine, California 92619-7013

© 2006 by BROADCOM CORPORATION. All rights reserved.

56802-PB01-R 03/24/06

Phone: 949-450-8700  
Fax: 949-450-8710  
E-mail: [info@broadcom.com](mailto:info@broadcom.com)  
Web: [www.broadcom.com](http://www.broadcom.com)