


SEE DETAIL "A"	ţ
	Ā
	'

MIN	NOM	MAX
-	-	1.20
0.05	0.10	0.15
0.95	1.00	1.05
0.22	0.32	0.38
0.09	-	0.20
11.80	12.00	12.20
10.00 BSC		
11.80	12.00	12.20
10.00 BSC		
0.65 BSC		
0.45	0.60	0.75
	- 0.05 0.95 0.22 0.09 11.80	0.05 0.10 0.95 1.00 0.22 0.32 0.09 - 11.80 12.00 10.00 BSC 11.80 12.00 0.65 BSC 0.65 BSC

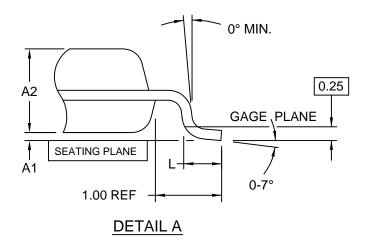

NOTES:

- 1. DIMENSIONS D1 AND E1 INCLUDE MOLD MISMATCH, BUT DO NOT INCLUDE MOLD PROTRUSION; ALLOWABLE PROTRUSION IS 0.254 MM ON D1 AND E1.
- 2. DETAILS OF PIN 1 IDENTIFIER ARE OPTIONAL BUT MUST BE LOCATED WITHIN THE ZONE INDICATED.
- 3. ALLOWABLE DAMBAR PROTRUSION IS 0.08 MM TOTAL IN EXCESS OF THE B DIMENSION AT MAXIMUM MATERIAL CONDITION. PROTRUSION NOT TO BE LOCATED ON LOWER RADIUS OR FOOT OF LEAD.
- 4. DIMENSIONS ARE IN MILLIMETERS.
- 5. MEETS JEDEC MS-206.



PROPRIETARY INFORMATION

PACKAGE OUTLINE 52L TQFP, 10x10x1.0 MM

APPROVAL DOCUMENT CONTROL NO. 21-0146

A 1

This datasheet has been downloaded from:

www. Data sheet Catalog.com

Datasheets for electronic components.