

SUB-MINIATURE SMT PUSHBUTTON SWITCHES




SPECIFICATIONS

Rating:	100mA @ 50 VDC
Mechanical Life:	50,000 cycles typical
Contact Resistance:	80mΩ max. typical @ 2-4 VDC
Insulation Resistance:	100mA
Dielectric Strength:	100MΩ min.
Operating Force:	>1,000 Vrms at sea level
	50 ± 25 gf

MATERIALS



Housing:	4/6 Nylon
Actuator:	6T Nylon
Cover:	Stainless steel
Contacts:	Silver plated phosphor bronze
Terminals:	Silver plated brass
Spring:	Stainless steel

HOW TO ORDER



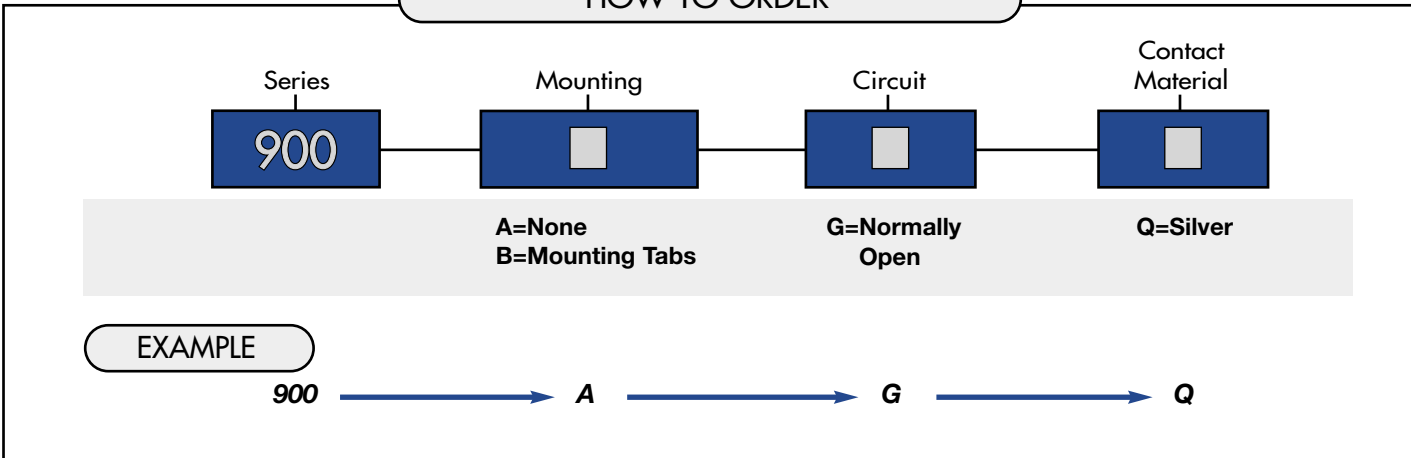


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

P.C. MOUNTING

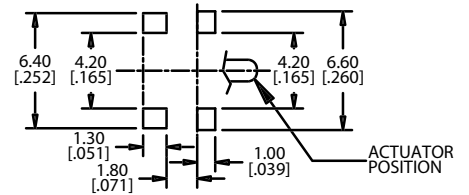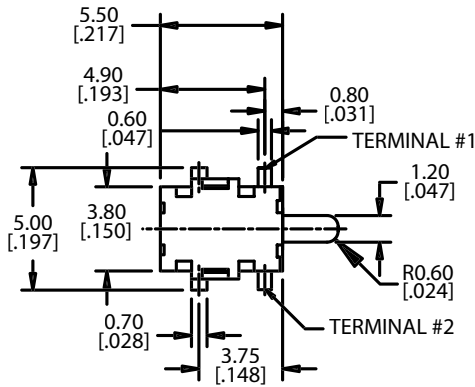


Schematic

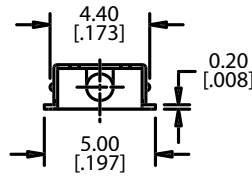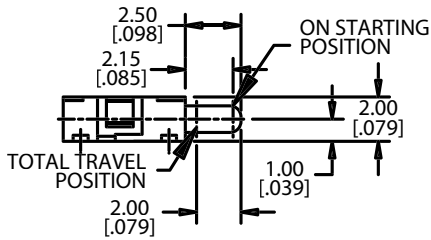


P.C. MOUNTING

WITH MOUNTING TABS

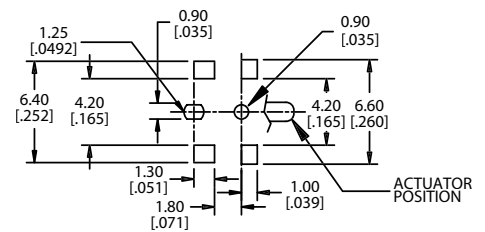

Schematic

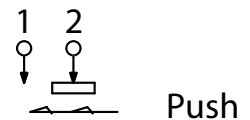

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

900 SMT TAPE AND REEL

