

T-41-83

**CLA60**  
**Transistor Output CLA60AA**  
**CLA60AB**

**High Voltage  
Axial Lead Isolators**

**GENERAL DESCRIPTION** — The Clairex CLA60 series axial lead optoisolators are designed for applications requiring hermeticity and high voltage isolation. The CLA60 series have guaranteed minimum current transfer ratios and the phototransistor base lead is available for applications requiring it. The construction of the isolator provides a minimum of 5mm between the emitter case and detector case assuring a 10KV volt DC isolation. Emitter and detector components are hermetically sealed. Case material is Valox®.

**ABSOLUTE MAXIMUM RATINGS**

Maximum Storage and Operating Temperature — 40°C to 100°C

**EMITTER**

Power Dissipation

At 25°C ambient = 150mw

Continuous Forward Current = 40mA

Derate 2mw°C

**DETECTOR**

Power Dissipation


At 25°C = 200mw

Derate 2mw°C

Maximum Voltages

V<sub>CEO</sub> = 40 volts V<sub>ECO</sub> = 6 volts

Maximum Current = 100mA

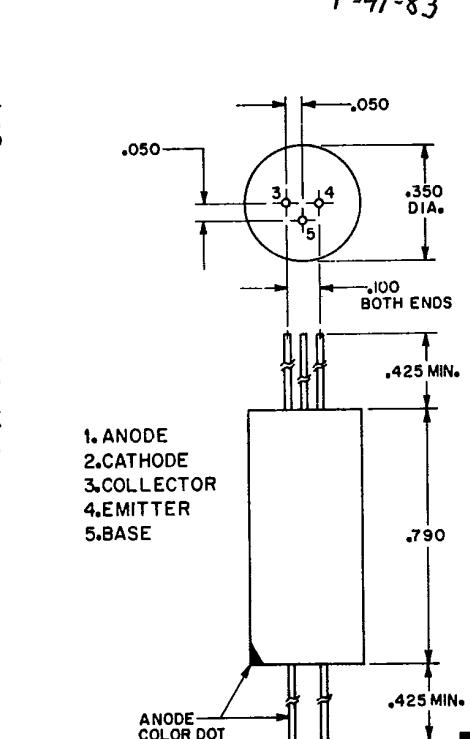

U.L. RECOGNIZED COMPONENT

**ELECTRICAL CHARACTERISTICS (25°C Free Air unless otherwise designated)**

Symbol	Characteristic	Test Conditions	CLAA60 Min. Max.	CLAA60AA Min. Max.	CLAA60AB Min. Max.	Units
Emitter VF VR	Forward Voltage Reverse Voltage	IF = 10mA IR = 10µA	3	1.5	3	1.5 Volts Volts
Sensor BV <sub>CEO</sub> BV <sub>ECO</sub>	Collector to Emitter Breakdown Voltage Emitter to Collector Breakdown Voltage	I <sub>CEO</sub> = 100µA I <sub>ECO</sub> = 100µA	55	55	40	Volts Volts
I <sub>D</sub> (I <sub>CEO</sub> )	Leakage Current	I <sub>CEO</sub> = 100µA IF = 0, V <sub>CE</sub> = 10V	6	6	6	na
Coupled TR, IC/IF V <sub>CE</sub> (SAT)	Isolation Voltage Transfer Ratio Collector to Emitter Saturation Voltage	V <sub>CE</sub> = 10V, IF = 10mA IF = 10mA, I <sub>CE</sub> = 1mA IF = 10mA, I <sub>CE</sub> = .25mA	10,000 40	10,000 20	10,000 10	DC Volts % Volts Volts
tr	Rise Time	V <sub>CE</sub> = 10V, RL = 100Ω I <sub>CE</sub> = 1mA	.5	.5	.5	μSEC
tf	Fall Time	V <sub>CE</sub> = 10V, RL = 100Ω I <sub>CE</sub> = 1mA	6 TYP	6 TYP	6 TYP	μSEC

Valox® is a registered trademark of the General Electric Company.

T-41-83

The Clairex series of axial opto-isolators provide the designer with an inexpensive means to transmit an analog or digital signal between two electrically isolated systems, while at the same time reducing common mode noise. Opto-isolators have found use in such applications as patient monitoring equipment, sensing circuits, and in various types of feed back circuitry.

## TRANSISTOR OUTPUT SCHEMATIC

