


Molded Metal Film High Ohmic Value Resistors



FEATURES

- 0.125W to 0.5W at 70°C
- NF C 83-230
- CECC 40 100
- Resistance range: 300kΩ to 50MΩ
- Good initial precision: up to $\pm 1\%$
- High stability
- Accurate dimensions
- Good insulation
- Limiting element voltages: 500V, 800V and 1200V

DIMENSIONS in millimeters

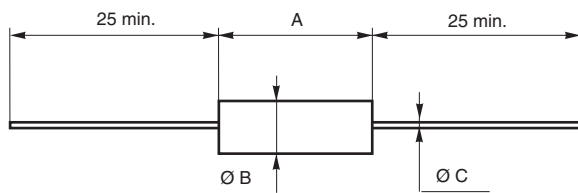

SERIES	DIMENSIONS	A	Ø B	Ø C	UNIT WEIGHT IN g.
RCMX02		6.5 ± 0.2	$2.5^{+0}_{-0.2}$	0.6	0.26
RCMX05		10.2 ± 0.2	3.65 ± 0.1	0.6	0.46
RCMX1		16 ± 0.5	6.2 ± 0.2	0.8	1.30


TECHNICAL SPECIFICATIONS			
VISHAY SFERNICE SERIES	RCMX02	RCMX05	RCMX1
NF C / CECC 83-230	RS80	RS81	RS82
Power Rating at 70°C	0.125W	0.250W	0.500W
Resistance Value Range	300kΩ to 10MΩ	1MΩ to 20MΩ	2MΩ to 50MΩ
Tolerance and Associated Series	$\pm 1\%$ E96	$\pm 1\%$ E96	$\pm 5\%$ E24
Maximum Voltage	500V	800V	1200V
Critical Resistance	2MΩ	2.55MΩ	2.87MΩ
Temperature Coefficient Rated in the Range - 55°C + 125°C	$K3 \leq \pm 50 \text{ppm}/^\circ\text{C}$		
Insulation Resistance (Typical)	$\geq 10^7 \text{M}\Omega$ (500VDC)		
Voltage Coefficient	$\leq 10 \text{ppm}/\text{Volt}$		
Environmental Specifications	- 65°C/+ 155°C/10 days		

Undergoes European Quality Insurance System (CECC) in ohmic value range 300kΩ - 2,2 MΩ




PERFORMANCE			
NF C 83-230 - CECC 40 100			TYPICAL VALUES AND DRIFTS
TESTS	CONDITIONS	REQUIREMENTS	
Load Life at max. Category Temperature	1000 h at 125°C 33% of Pn	≤ ± 1% Insulation resist. >1GΩ	± 2% at 1000 h Insulation resist. 10 ⁶ MΩ
Short Time Overload	2.5Um/5s limited to 2Un	≤ ± 0.25%	± 0.5%
Damp Heat Humidity (Steady State)	10 days with low load	≤ ± 1% Insulation resist. >10 ² MΩ	± 1.5%
Rapid Temperature Change	- 55°C + 125°C	≤ ± 0.25%	± 0.25%
Climatic Sequence	- 55°C + 125°C severity 1	≤ ± 1% Insulation resist. > 100MΩ	± 1% Insulation resist. 10 ⁶ MΩ
Terminal Strength	Pull - Twist - 2 bends	≤ ± 0.25%	± 0.05%
Vibration	10 to 500Hz	≤ ± 0.25%	± 0.05%
Soldering (Thermal Shock)	+ 260°C 10s	≤ ± 0.25%	± 0.1%
Load Life	cycle 90'/30' 1000h at Pn at 70°C	≤ ± 1% Insulation resist. > 1GΩ	± 0.5% Insulation resist. 10 ⁶ MΩ
Shelf Life	1 year ambient temperature	-	± 0.25%

POWER RATING CHART

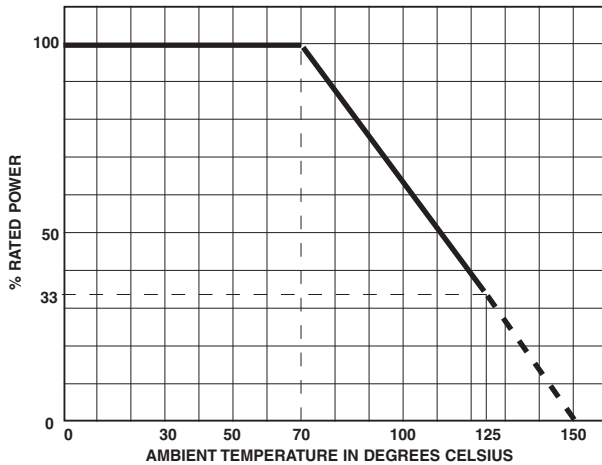

TEMPERATURE RISE

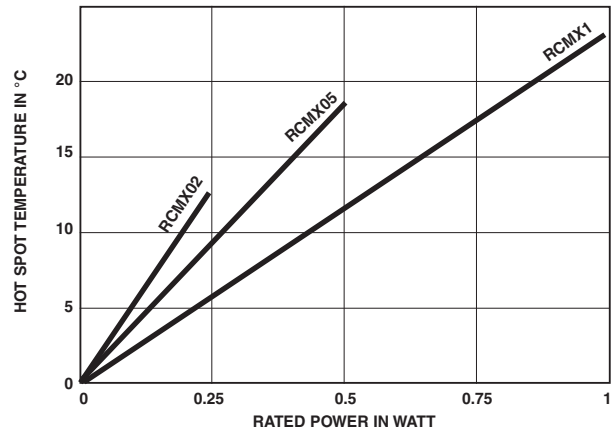

PRACTICAL OPERATING TOLERANCES

After 1000 hours load life at rated power 90'/30' cycles + 70°C ambient temperature, the typical total drifts, measured at + 70°C, are as follows :

Typical total drift = drift due to T.C. (K3) + life drift 0.5%.

Maximum deviation from rated ohmic value including ±1% manufacturing tolerance ≤ 1.5%.

MARKING

Printed: VISHAY SFERNICE trademark, series, style, ohmic value (in Ω), tolerance (in %), temperature coefficient, manufacturing date. **Due to lack of space RCMX02 is printed MX02.**

ORDERING INFORMATION						
RCMX	02		10MΩ	± 5%	K3	
SERIES	STYLE	SPECIAL DESIGN	OHMIC VALUE	TOLERANCE	TEMPERATURE COEFFICIENT	PACKAGING
		Method N° Optional				Optional



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.