


**5mm Discrete LED  
Bi-Color  
3 Ledged, Non-Tinted, Diffused**



**521-9450, -9460**

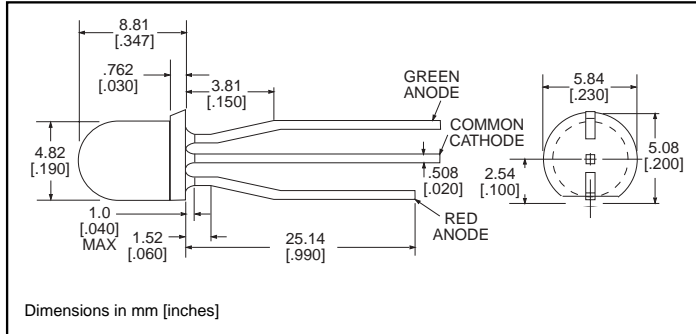

<u>PART NO.</u>	<u>LED COLOR</u>
521-9450	Red/Green
521-9460	Yellow/Green <b>NEW</b>

**MOUNTING CLIP: 515-0004**  
located on page 6-48

**ABSOLUTE MAXIMUM RATINGS** ( $T_A=25^\circ\text{C}$ )

	Red/Green <b>-9450</b>	Yellow/Green <b>-9460</b>
Power Dissipation (mW)	135/135	135/135
Forward Current (mA)	25/25	25/25
Derating (mA/°C) From 50°C 1. From 40°C	.5/.5	.5/.5
Peak Current (mA)	90/90	90/90
Pulse width = 10 $\mu\text{s}$		
Operating Temperature (°C)	-20/+85	-20/+85
Storage Temperature (°C)	-55/+100	-55/+100
Soldering Temperature	260°C, 5 seconds, 1.6 mm from case	

Solder Adherence per MIL-STD-202E, Method 208C

**OPERATING CHARACTERISTICS** ( $T_A=25^\circ\text{C}$ )

		Red/Green <b>-9450</b>	Yellow/Green <b>-9460</b>
Luminous Intensity (mcd)	Min.	2.1/4.2	2.1/4.2
$I_F=10\text{mA}$	Typical	5/8	5/8
Peak Wavelength (nm)	Typical	635/565	583/565
$\lambda_{\text{Peak}}$			
Viewing Angle ( $2\theta^{1/2}$ )	Typical	65°	65°
Forward Voltage (V)	Typical	2.1/2.3	2.1/2.1
$I_F=10\text{mA}$	Max.	2.5/2.7	2.5/2.5

$\theta^{1/2}$  is the off axis angle at which the luminous intensity is half the axial luminous intensity

**6**