



**MULTILAYER BALUN SPECIFICATION**  
 P/N: **HHM1570B1** For W-LAN

**[MECHANICAL DIMENSIONS]**

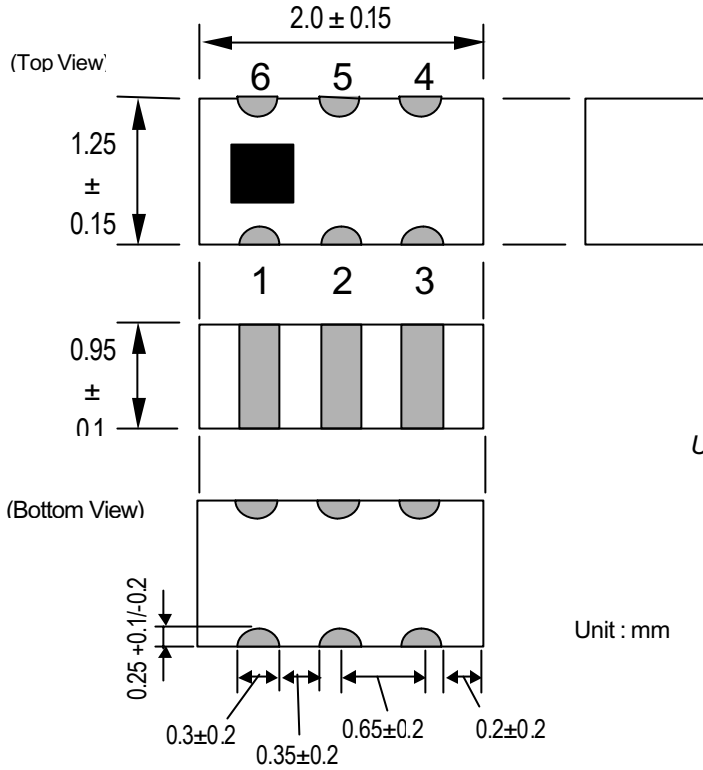

**Pin configuration**

- 1 Unbalanced Port
- 2 GND or DC feed + RF GND
- 3 Balanced Port
- 4 Balanced Port
- 5 GND
- 6 N.C.

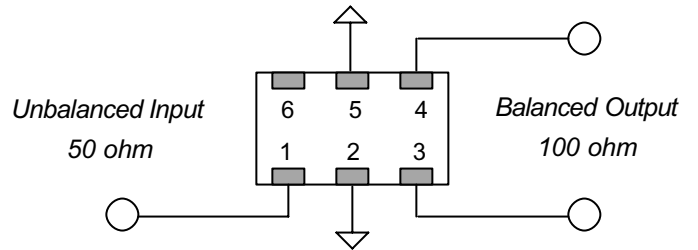

**[ELECTRICAL CHARACTERISTICS]**

Unbalanced Impedance	50 ohm
Balanced Impedance	100ohm
Frequency Range	4900-5950MHz
Unbalanced Port Return Loss	10 dB Min.
Phase Imbalance at Balanced Port	180 ± 10 deg.
Amplitude Imbalance at Balanced Port	0 ± 2.0 dB
Insertion Loss	1.0 Max.

**[TEMPERATURE RANGE]**

Storage Temperature	-40°C ~ +85°C
Operating Temperature	-40°C ~ +85°C

**[STANDARD PACKAGING QUANTITIES]**

2000pcs. /reel

Notes : All the technical data and information contained herein are subject to change without prior notice.


# PRELIMINARY

## [ Frequency response ]


HHM1570B1 (UNBALANCE 50ohm/BALANCE 100ohm)

TDK Corporation


Return Loss

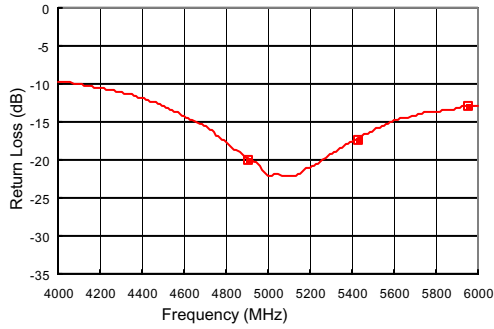


Amplitude Balance

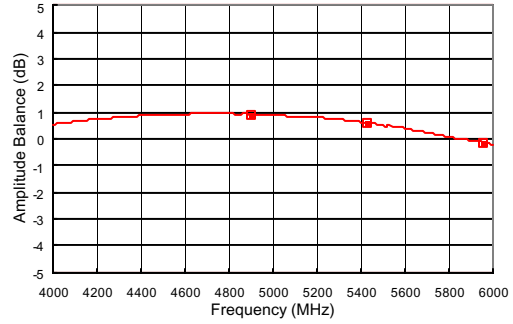


Insertion Loss

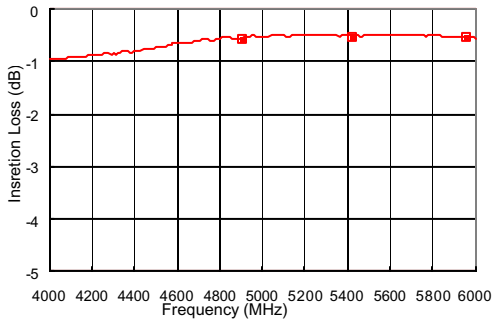

Phase Balance

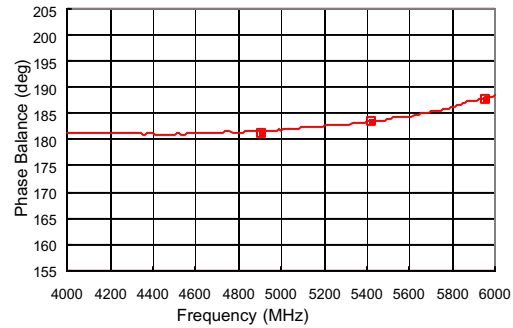

## [ Recommended PCB Pattern ]

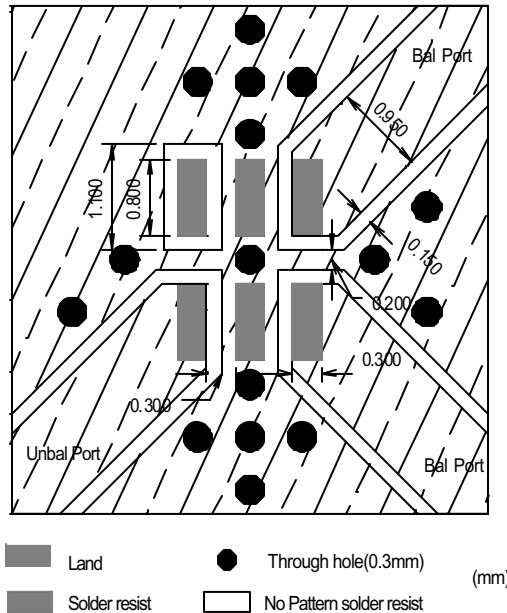

Line width be designed to match 50ohm characteristic impedance, depending on PCB material and thickness.

Notes : All the technical data and information contained herein are subject to change without prior notice.