



SVC371

Diffused Junction Type Silicon Diode


Composite Varactor Diode for AM Receiver Low-Voltage Electronic Tuning Applications

Features

- Excellent large-input characteristics because of dual-varactor composite type.
- The number of manufacturing processes can be reduced and automatic mounting is possible because of composite type.
- High capacitance ratio and high quality factor.
- Facilitates tuning circuit configuration because the cathodes of three dual-type elements are separated from each other, resulting in almost no interelement coupling.
- Possible to offer the SVC371 devices in a tape reel packaging.
- Surface mount type.

Package Dimensions

unit:mm
1268

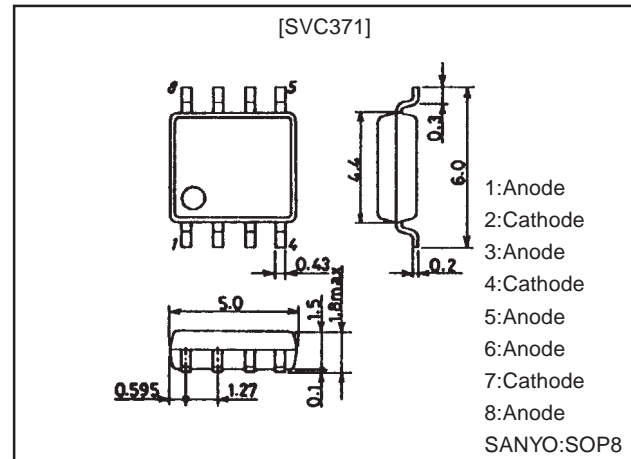

Specifications

Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Reverse Voltage	V_R		16	V
Junction Temperature	T_j		125	
Storage Temperature	T_{stg}		-55 to +125	°C

Electrical Characteristics at Ta = 25°C

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Breakdown Voltage	$V_{(BR)R}$	$I_R=10\mu A$	16			V
Reverse Current (One diode)	I_R	$V_R=20V$			100	nA
Interterminal Capacitance (Average)	C_{1V}	$V_R=1V, f=1MHz^*1$	460*		540*	pF
	C_{6V}	$V_R=6V, f=1MHz$		50		pF
	C_{8V}	$V_R=8V, f=1MHz$	19		26	pF
Quality Factor	Q	$V_R=1V, f=1MHz$	200			
Capacitance Ratio	CR	$C_{1V}/C_{8V}, f=1MHz$	18.5			
Matching Tolerance*2	ΔC_m	CRFN-COSC-0.25pF / COSC, $V_R=1V, f=1MHz$			2.5	%
		$V_R=6V, f=1MHz$			3.0	%
		$V_R=8V, f=1MHz$			3.0	%


Note)*1:1MHz signal:20mVrms.

Note)*2:Calculate using the average of tow diodes contained in each element of OSC, RF1, RF2.



Note)*:The SVC371 is classified by C_{1V} as follows:

Rank	C_{1V} (pF)
R	460.0 to 491.0
S	482.0 to 515.0
T	505.0 to 540.0

Electrical Connection



SVC371

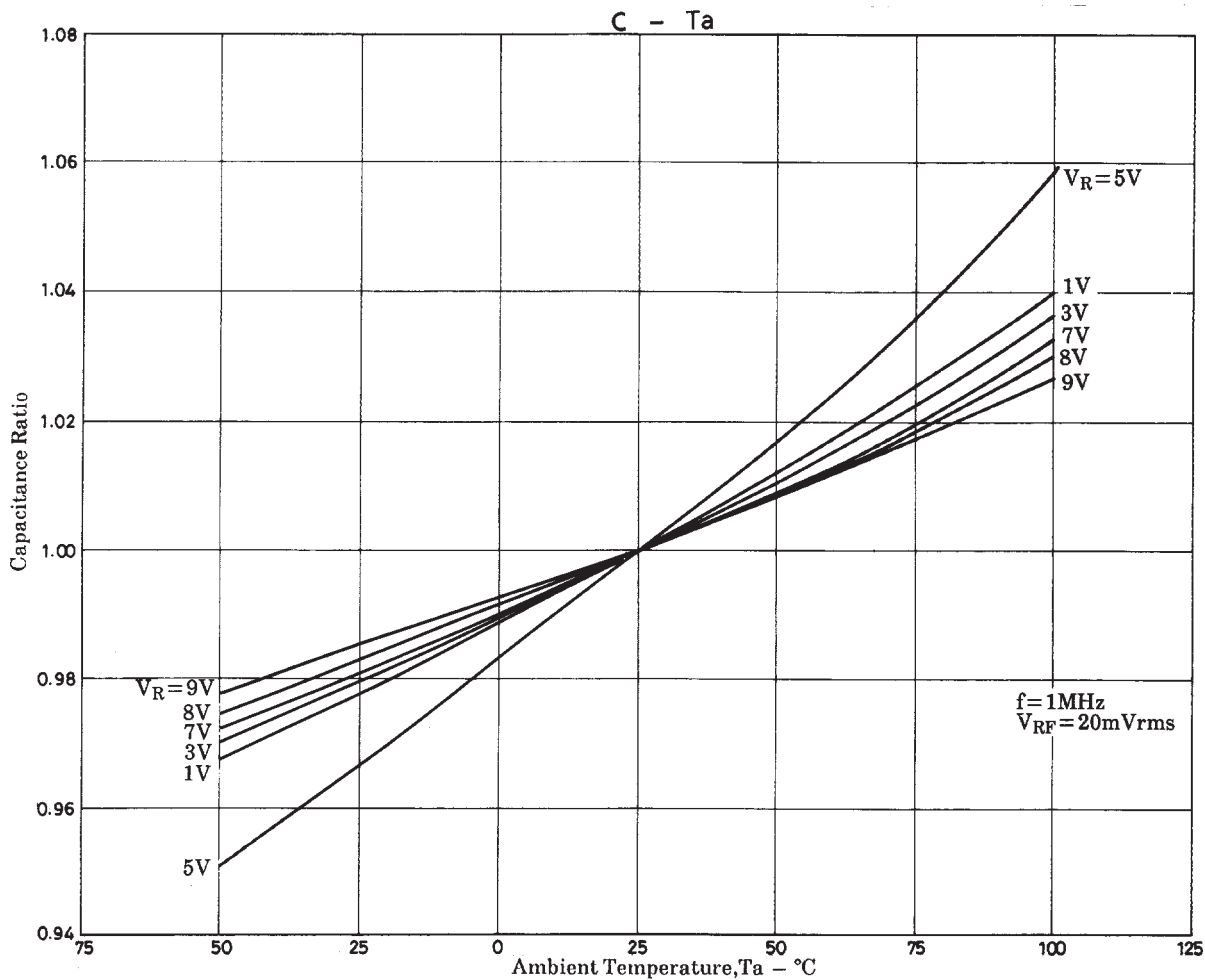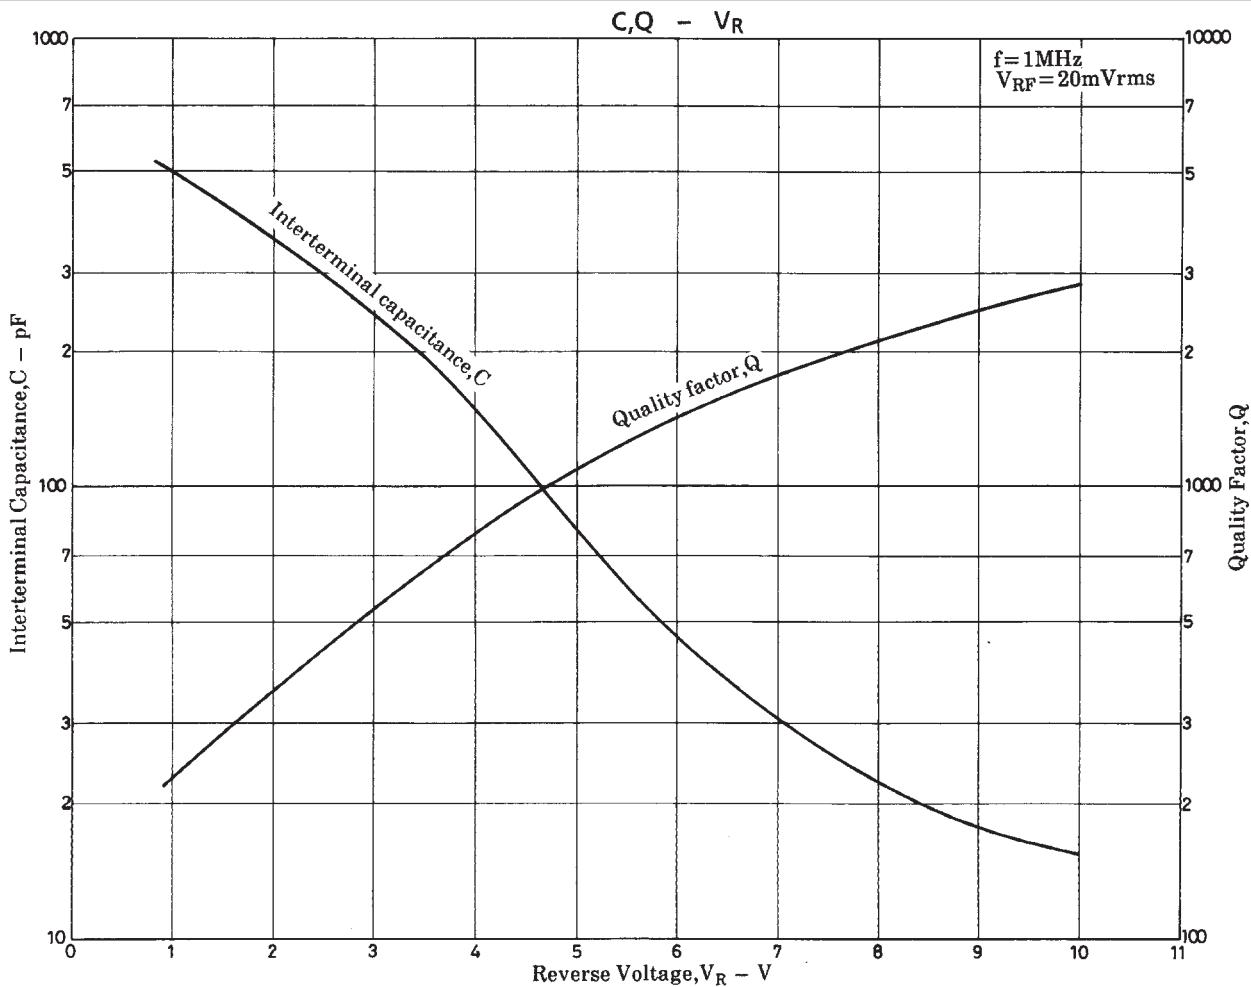

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of March, 1998. Specifications and information herein are subject to change without notice.