

## ISOLATED DC/DC CONVERTERS

48 Vdc Input

5 Vdc/1.7 A Output

**bel**  
POWER PRODUCTS

**0RXL-02T050**

**RoHS Compliant**

**Rev.A**

- Isolated
- High Efficiency
- Fixed Frequency (220 kHz)
- High Power Density
- Low Cost
- SCP/OCP
- Output Over-Voltage Clamp
- Synchronization



### Description

The 0RXL-02T050 is an isolated dc/dc converter that operates from a nominal 48 Vdc source. This unit will provide up to 10 W of output power from a nominal 48 Vdc input. This unit is designed to be highly efficient and very low cost. Features include Synchronization, over current protection, short circuit protection and output over voltage clamp. This converter is provided in an industry standard package.

### Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number
5 Vdc	38 Vdc - 60 Vdc	1.7 A	10 W	81%	0RXL-02T050

**Notes:** 1. All part numbers above indicate RoHS 6. Change the second letter "R" to "7" for RoHS 5 part numbers.  
2. Add "G" suffix at the end of the model numbers listed above to indicate "Tray Packaging".

### Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Continuous Input Voltage	-0.3 V	-	80 V	
I/O Isolation Voltage	-	-	500 V	
Synchronization Voltage	-	-	5.5 V	
Ambient Temperature	-40 °C	-	85 °C	
Storage Temperature	-40 °C	-	125 °C	

### Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	38 V	48 V	60 V	
Input Current (full load)	-	0.3 A	-	
Input Current (no load)	-	8 mA	15 mA	
Input Reflected Ripple Current (rms)	-	20 mA	40 mA	With simulated impedance of 10 uH, two 0.47 uF ceramic capacitor at 5 Hz to 20 MHz BW, and a 10 uF/100 V electrolytic capacitor with ESR=1ohm max at 200 kHz.
Input Reflected Ripple Current (pk-pk)	-	60 mA	100 mA	
I <sup>2</sup> t Inrush Current Transient	-	-	0.2 A <sup>2</sup> s	

**Note:** All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

# ISOLATED DC/DC CONVERTERS

48 Vdc Input

5 Vdc/1.7 A Output



## Output Specifications

Parameter	Min	Typ	Max	Notes	
Output Voltage Set Point	4.8 V	5.0 V	5.2 V	Vin=48 V, Io=100% load.	
Load Regulation	-	-	0.2%Vo	Io = 0.35 A - 1.7 A	
Line Regulation	-	-	0.1%Vo	Vin = 38 V - 60 V	
Regulation Over Temperature (-40 °C to +85 °C)	-	-	0.03%/°C		
Ripple and Noise (pk-pk)	-	-	70 mV	Test conditions: 0-20 MHz BW; with a 4.7 uF and a 0.1 uF ceramic capacitor at the output.	
Ripple and Noise (rms)	-	10 mV	20 mV		
Output Current	0.35 A	-	1.7 A		
Output Current Limit	2.0 A	-	3.5 A	Hiccup	
Turn on Time	-	-	90 mS		
Overshoot at Turn On	0%	-	5%		
Output Capacitance	0 uF	-	680 uF		
<b>Transient Response</b>					
50% ~ 100% Max Load	Vo=5.0 V	-	100 mV	150 mV	Test conditions: di/dt=0.1 A/uS; Vin=48 V; with a 100 uF/10 V Tantalum capacitor at the output.
Settling Time		-	500 uS	-	
50% ~ 100% Max Load		-	100 mV	150 mV	
Settling Time		-	500 uS	-	

**Note:** All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

## General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency	77%	81%	-	Vin = 48 V; Full Load
Switching Frequency	200 kHz	220 kHz	240 kHz	
Isolation Capacitance	-	1000 pF	-	
Output Over Voltage Clamp	-	-	7 V	
MTBF	8,159,815 hours			Calculated Per Bell Core SR-332 (Vin=48 V; Vo=5 V, Io = 80% Load; TA = 25 °C)
Dimensions	Inches (L x W x H) Millimeters (L x W x H)			
	1.9 x 0.98 x 0.44 48.26 x 24.89 x 11.25			
Weight	-	10.5 g	-	

**Note:** All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

# ISOLATED DC/DC CONVERTERS

48 Vdc Input


5 Vdc/1.7 A Output




## Control Specifications

Parameter	Min	Typ	Max	Notes
<b>Synchronization Signal Specifications</b>				
Signal Low	-	-	0.4 V	
Signal High	2.4 V	-	-	
Frequency	255 kHz	-	300 kHz	
Duty Cycle	45%	-	55%	

## Efficiency Data

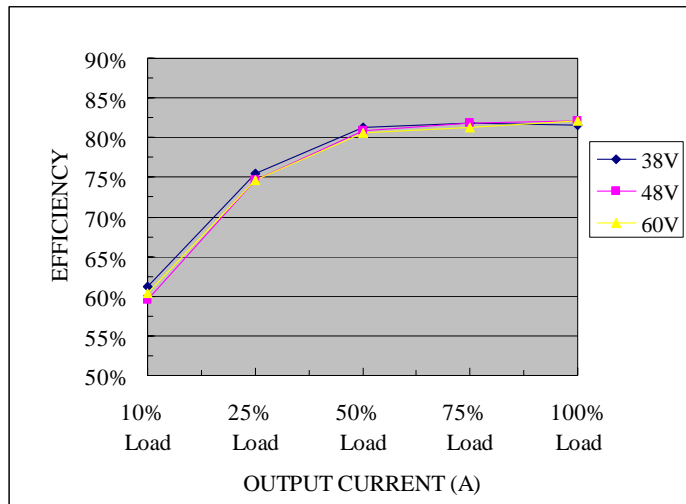

## Thermal Derating Curve

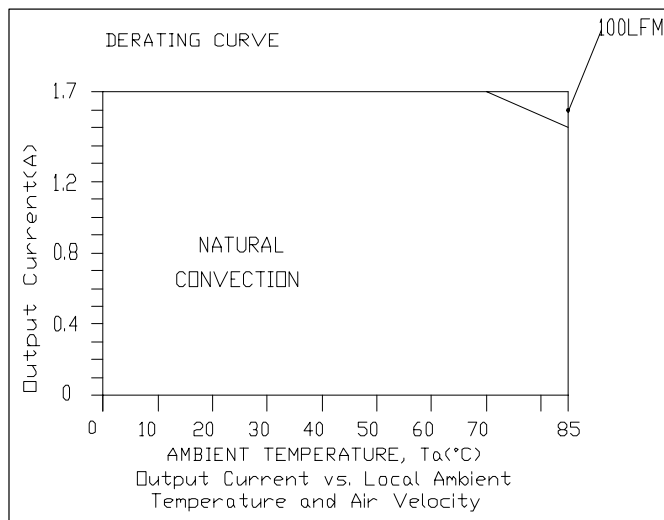


# ISOLATED DC/DC CONVERTERS

48 Vdc Input

5 Vdc/1.7 A Output




## Ripple and Noise Waveform

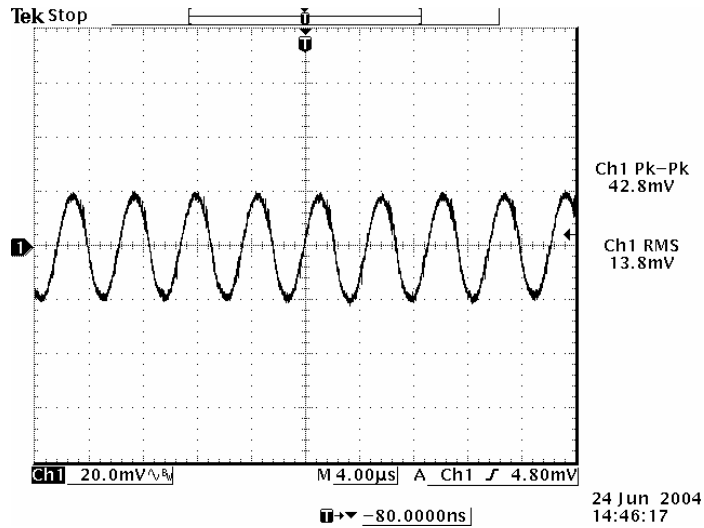


**Note:** Ripple and noise at full load, 48 V input, 5 V/1.7 A output, and  $T_a=25$  deg C, with a 4.7  $\mu$ F and a 0.1  $\mu$ F ceramic capacitor at output.

## Transient Response Waveforms

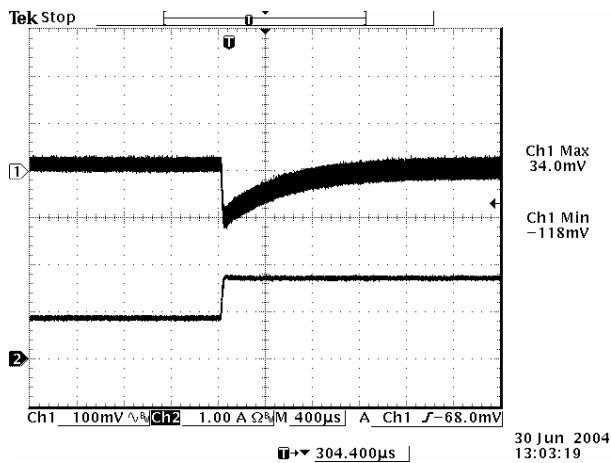

50%-100% Load Transients

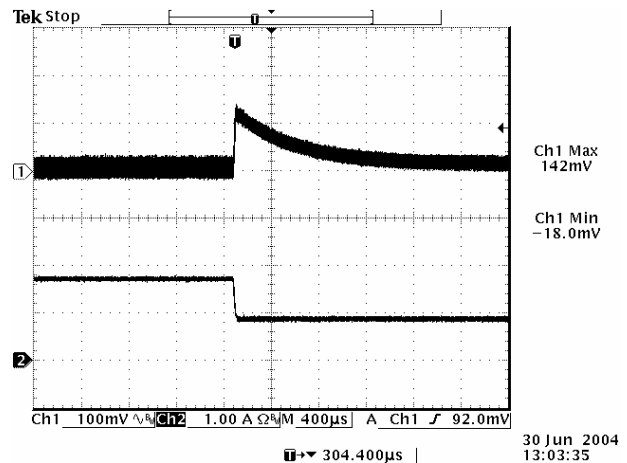

100%-50% Load Transients

**Note:** Transient Response at  $V_{in}=48$  V,  $V_o=5$  V,  $di/dt=0.1A/\mu S$ , with a 100  $\mu$ F/10 V tantalum capacitor,  $T_a=25$  deg C.


# ISOLATED DC/DC CONVERTERS

48 Vdc Input

5 Vdc/1.7 A Output



## Mechanical Outline

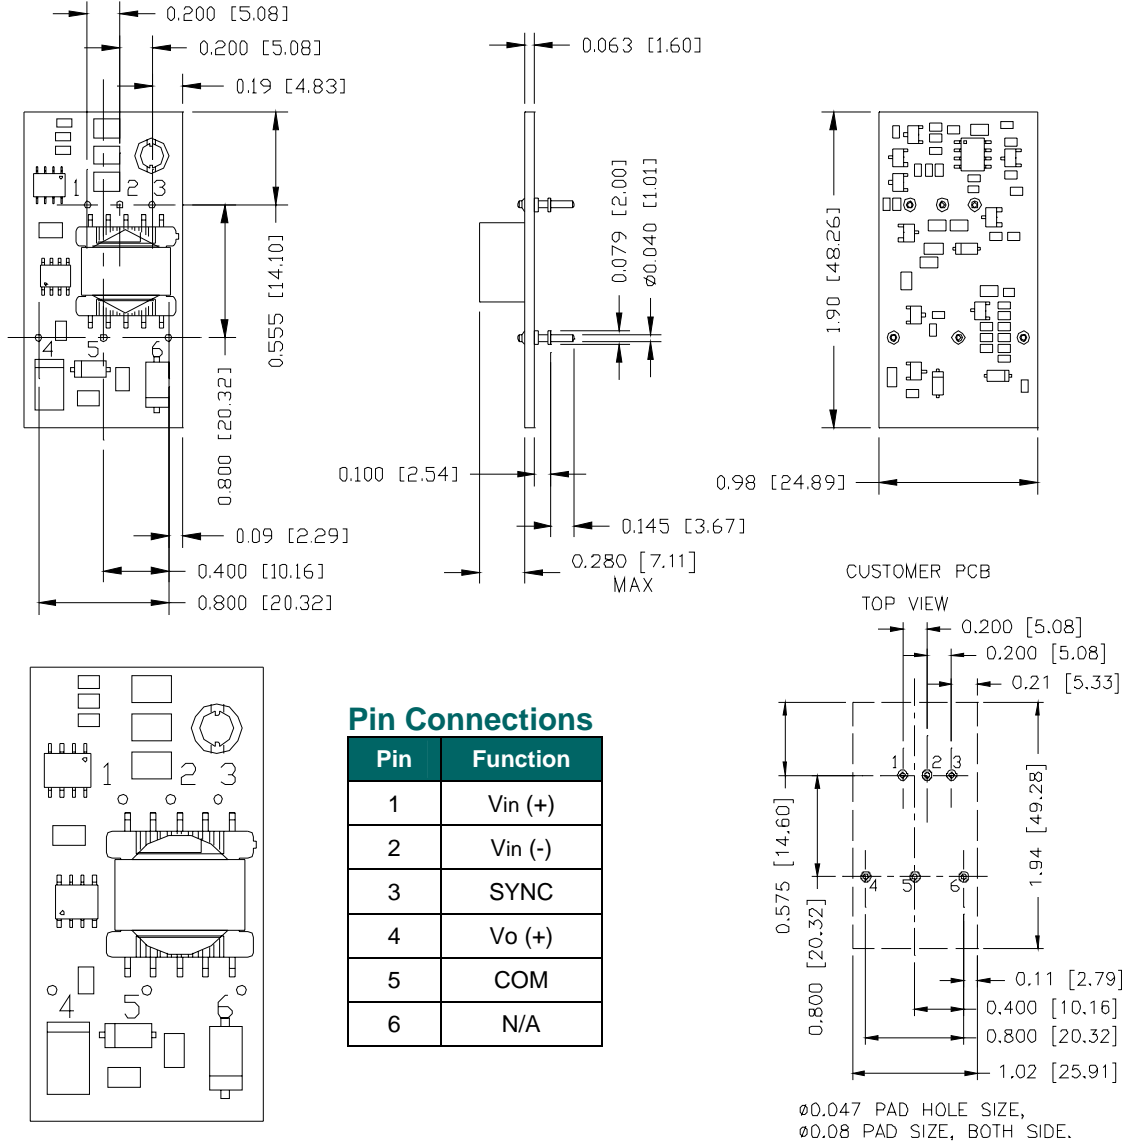

## RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2007 Bel Fuse Inc. Specifications subject to change without notice. 030607

### CORPORATE

**Bel Fuse Inc.**  
 206 Van Vorst Street  
 Jersey City, NJ 07302  
 Tel 201-432-0463  
 Fax 201-432-9542  
[www.belfuse.com](http://www.belfuse.com)

### FAR EAST

**Bel Fuse Ltd.**  
 8F/ 8 Luk Hop Street  
 San Po Kong  
 Kowloon, Hong Kong  
 Tel 852-2328-5515  
 Fax 852-2352-3706  
[www.belfuse.com](http://www.belfuse.com)

### EUROPE

**Bel Fuse Europe Ltd.**  
 Preston Technology Management Centre  
 Marsh Lane, Suite G7, Preston  
 Lancashire, PR1 8UD, U.K.  
 Tel 44-1772-556601  
 Fax 44-1772-888366  
[www.belfuse.com](http://www.belfuse.com)