


## ENERGIZER NO. 1222

### 9V

**SUPER HEAVY DUTY**



Industry Standard Dimensions in mm (inches)

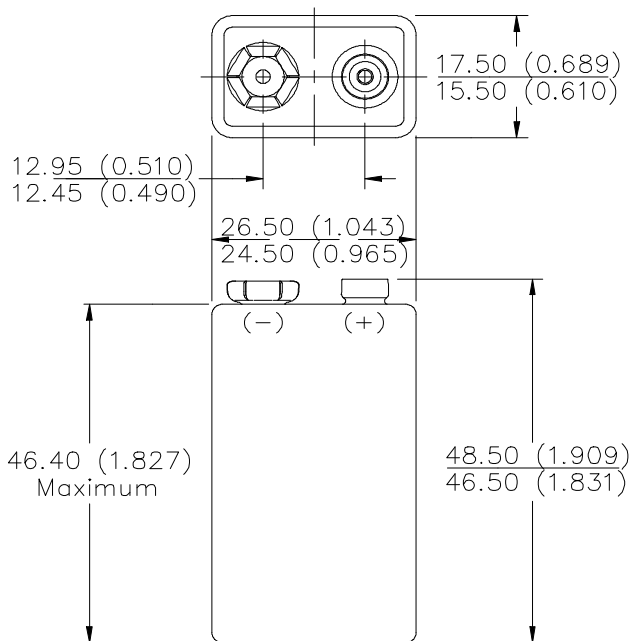

**Chemical System:** Leclanche  
 Zinc-Manganese Dioxide (Zn/MnO<sub>2</sub>)  
 (No Added Mercury or Cadmium)

**Designation:** ANSI-1604D, IEC-6F22

**Battery Voltage:** 9.0 Volts

**Operating Temp:** -5°C to 55°C (20°F to 130°F)

**Average Weight:** 37.0 grams (1.3 oz.)


**Volume:** 20.3 cubic centimeters (1.2 cubic inch)

**Average Capacity:** 400 mAh to 0.8 volts per cell  
 (Rated capacity at 5 mA continuous at 21°C)


**Cell:** Six No. 118P in series

**Jacket:** Metal


**TEMPERATURE EFFECTS**  
 Typical Service to 4.8 Volts

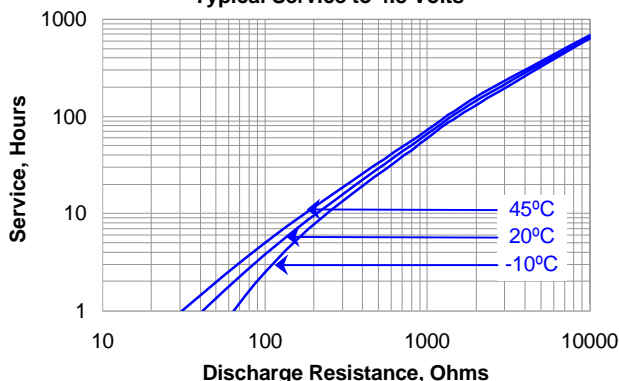

**CONSTANT RESISTANCE PERFORMANCE**  
 Typical Service

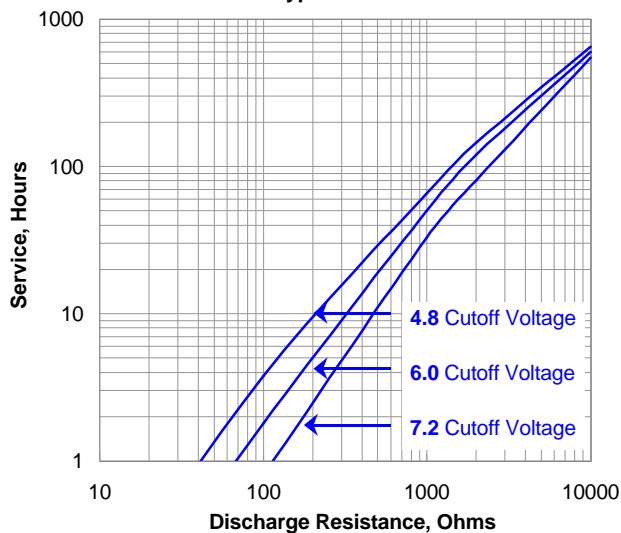

**CONSTANT CURRENT DISCHARGE**  
 Typical Service

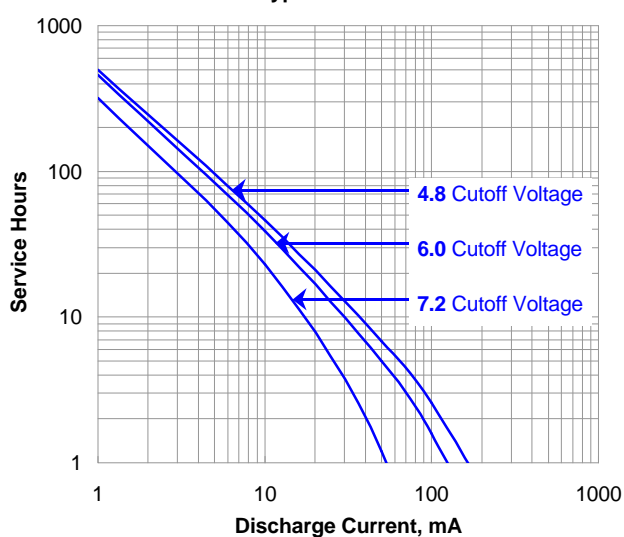

### Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.  
**Contents herein do not constitute a warranty.**

## ENERGIZER NO. 1222

### Typical Applications

**RADIO**  
620 ohm - 2 hours/day



**TOY**  
270 ohm - 1 hr/day



**CALCULATOR**  
180 ohm - 0.5 hr/day



**RECORDER**  
180 ohms - 1 hr/day



### **Important Notice**

This data sheet contains information specific to batteries manufactured at the time of its publication.  
**Contents herein do not constitute a warranty.**