

18FF-2Z-C4

RELAY SOCKET



CE

cULUS

File No.:E253370

Screw terminal,
DIN rail / Screw mounted,
with finger protection device



CHARACTERISTICS

| | |
|------------------------------|-------------------------------|
| Ambient temperature : | -40 °C to 70°C |
| Rated voltage: | 300VAC |
| Rated current : | 12A (per pole) |
| Insulation voltage (Min.) : | 5000VAC |
| Protection degree DIN40050 : | IP20 |
| Socket material : | PA66+GF V0 (UL) |
| Contacts spring material : | QSn6.5-0.1 |
| Plastic retainer : | available |
| White plastic tag : | available |
| Modules (on request) : | HFAA to HFHU module available |
| Terminal torque : | 0.6Nm |
| Wire strip length : | 7mm |
| Applicable relay type: | HF18FF (JZX-18FF) (2 poles) |

DIMENSIONS, PC BOARD LAYOUT AND WIRING DIAGRAM


Unit: mm

Outline Dimensions

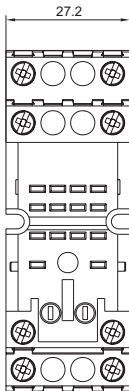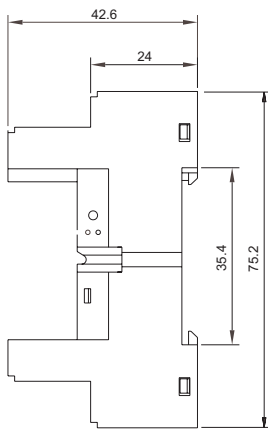



(Top View)

Wiring Diagram



(Top View)

Retainer Dimensions



HONGFA RELAY

ISO9001、ISO/TS16949、ISO14001、OHSAS18001 CERTIFIED

2007 Rev. 1.00