



6 Lake Street
PO Box 1436
Lawrence, MA
USA 01841

Telephone (617) 681-0392 • TeleFax (617) 681-9135 • Telex 928377

GOLD BONDED DIODES

TYPE 1N3469

FEATURES

- Low forward voltage drop
 - low power consumption
- Thirty years of proven reliability
 - one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

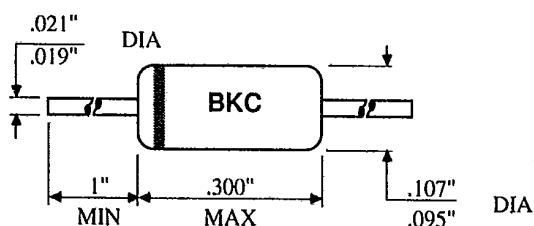
ABSOLUTE MAXIMUM RATINGS

Peak Inverse Voltage	35V	@ 25 °C
Peak Forward Current	600mA	unless
Operating Temperature Range	-40°C to 85°C	otherwise
Average Power Dissipation	80mW	specified

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min.	Max.	Unit	T °C
Peak Inverse Voltage	PIV	100uA	35		V	25°
Inverse Current	Ir	20V		15	uA	25°
Forward Voltage	Vf	25mA		.5	V	25°
Forward Voltage	Vf	600mA		1.0	V	25°

MECHANICAL



Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N3470

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

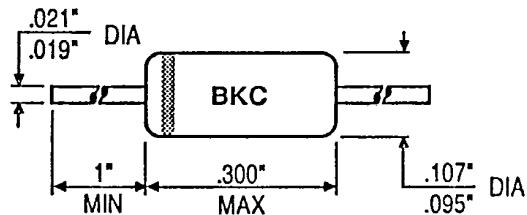
- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	35 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	35		V	25 °C
Reverse Current	Ir	20 V	30		µA	25 °C
Forward Voltage	Vf	600 mA	.5		V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N3483**T-01-07****GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

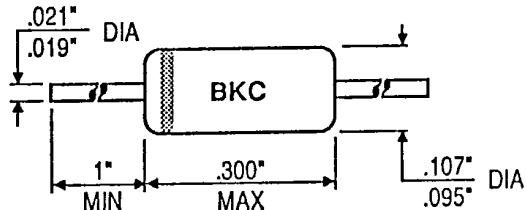
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	8 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	8		V	25 °C
Reverse Current	Ir	3 V		10	µA	25 °C
Forward Voltage	Vf	10 mA		.6	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N3592

T-03-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

**FEATURES**

- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

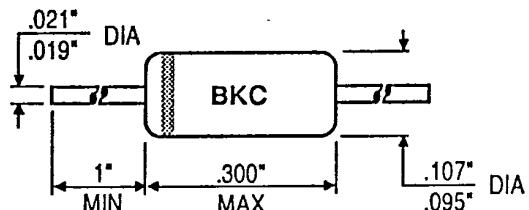
ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	25 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	25		V	25 °C
Reverse Current	Ir	4.5 V		4	µA	25 °C
Forward Voltage	Vf	15 mA		.5	V	25 °C
Reverse Recovery	Trr.	See note		40		

NOTE: If = 2, Vr = 2, Recover to .

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.