



VICOR CONFIDENTIAL

THIS DOCUMENT AND THE DATA DISCLOSED  
HEREIN OR HEREWITH IS NOT TO BE REPRODUCED,  
USED, OR DISCLOSED IN WHOLE OR IN PART  
TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION	DATE	APPROVED
01	DRN- E990450	RCM 3/9/00	DPK

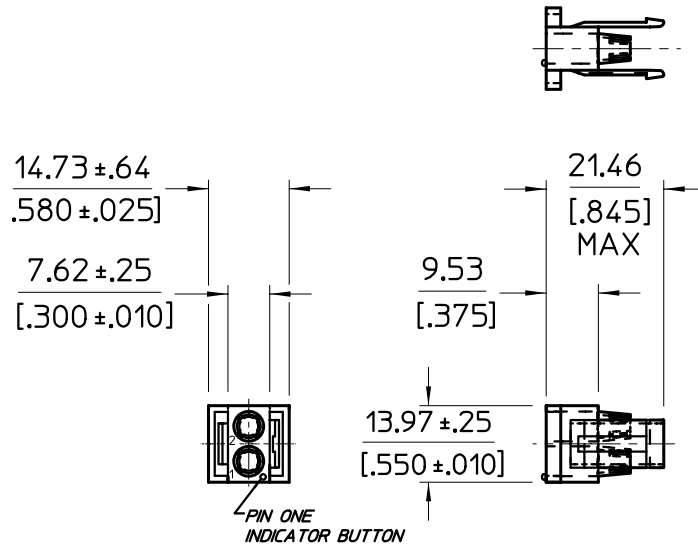

CONN HOUSING PLUG- REAR

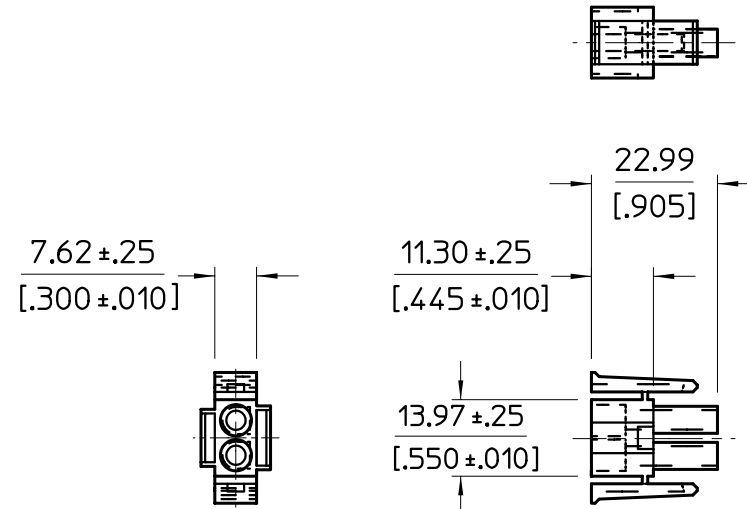



CONN HOUSING PLUG- FRONT

**FEATURES:**

- Product Type: Housing
- Connector Line: Universal MATE-N-LOK II.
- Contact Diameter (mm [in]): 2.13 [.084]
- Centerline (mm [in]): 6.35 [.250]
- No. of Circuits: 2
- Contact Layout: In-Line
- Housing type: Plug
- Mount: Free Hanging
- Packaging Method: Front & Rear Component
- Housing Material: Nylon
- Color: White
- Lock Type: Positive Lock
- High Current: No

**OTHER PROPERTIES:**

- Packaging Quantity: 250
- Voltage: 600 Volts
- Current Rating: 19 Amps Max
- Housing Flammability Rating: UL 94V-0
- Sealable: No
- Industry Application: Standard

DRAWN BY <i>RCM</i>		DATE <i>3/9/00</i>			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM/(INCHES) TOLERANCES ARE: DECIMALS      ANGLES .XXX ± 0.13/[.005]      —					
THIRD ANGLE PROJECTION 		SIZE B	FSCM NO. 67131	DWG NO. <b>20688</b>	REV 01
DO NOT SCALE DRAWING		SCALE FULL	SHEET 1 OF 1		