



2SB772S

PNP EPITAXIAL SILICON TRANSISTOR


MEDIUM POWER LOW VOLTAGE TRANSISTOR

DESCRIPTION

The UTC 2SB772S is a medium power low voltage transistor, designed for audio power amplifier, DC-DC converter and voltage regulator.

FEATURES

- *High current output up to 3A
- *Low saturation voltage
- *Complement to 2SD882S

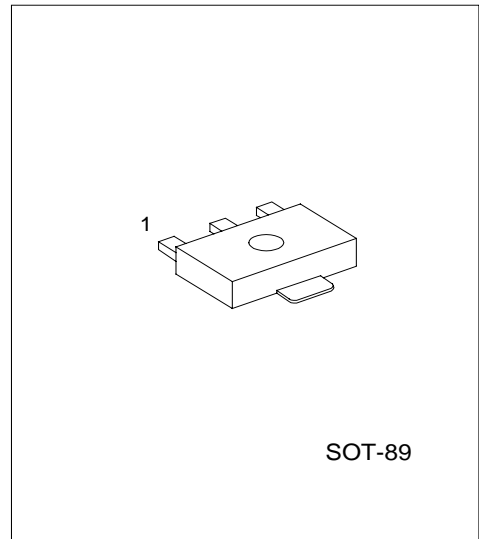

*Pb-free plating product number: 2SB772SL

PIN CONFIGURATION

PIN NO.	PIN NAME
1	Emitter
2	Collector
3	Base

ORDERING INFORMATION

Order Number		Package	Packing
Normal	Lead free		
2SB772S-AB3-R	2SB772SL-AB3-R	SOT-89	Tape Reel

■ ABSOLUTE MAXIMUM RATINGS (Ta = 25 °C)

PARAMETER	SYMBOL	RATINGS	UNIT
Collector -Base Voltage	V_{CB0}	-40	V
Collector -Emitter Voltage	V_{CEO}	-30	V
Emitter -Base Voltage	V_{EBO}	-5	V
Peak Collector Current	I_{CM}	-7	A
DC Collector Current	I_C	-3	A
Base Current	I_B	-0.6	A
Power Dissipation	P_D	1.0	W
Junction Temperature	T_J	+150	
Storage Temperature	T_{STG}	-40 ~ +150	

■ ELECTRICAL CHARACTERISTICS (Ta= 25 °C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector Cut-Off Current	I_{CBO}	$V_{CB}=-30V, I_E=0$			-1000	nA
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=-3V, I_C=0$			-1000	nA
DC Current Gain(Note 1)	h_{FE1}	$V_{CE}=-2V, I_C=-20mA$	30	200		
	h_{FE2}	$V_{CE}=-2V, I_C=-1A$	100	150	400	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=-2A, I_B=-0.2A$		-0.3	-0.5	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=-2A, I_B=-0.2A$		-1.0	-2.0	V
Current Gain Bandwidth Product	f_T	$V_{CE}=-5V, I_C=-0.1A$		80		MHz
Output Capacitance	C_{ob}	$V_{CB}=-10V, I_E=0, f=1MHz$		45		pF

Note 1: Pulse test: $P_W < 300\mu s$, Duty Cycle $< 2\%$

■ CLASSIFICATION OF h_{FE2}

RANK	Q	P	E
RANGE	100 ~ 200	160 ~ 320	200 ~ 400

TYPICAL CHARACTERISTICS

Fig.1 Static characteristics

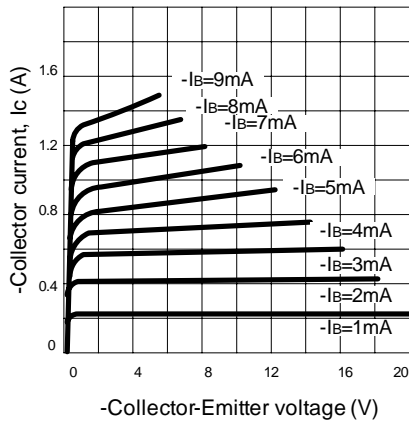


Fig.2 Derating curve of safe operating areas

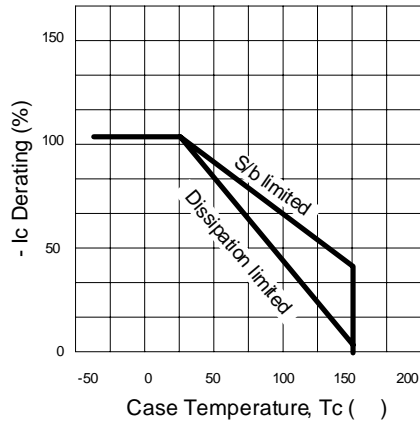


Fig.3 Power Derating

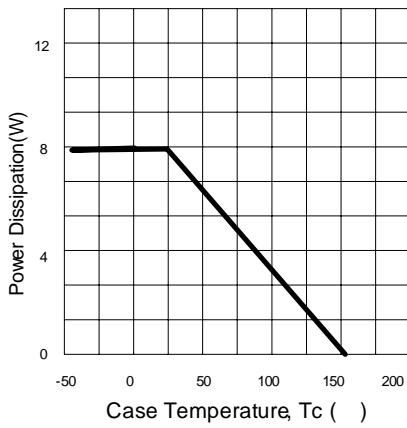


Fig.4 Collector Output capacitance

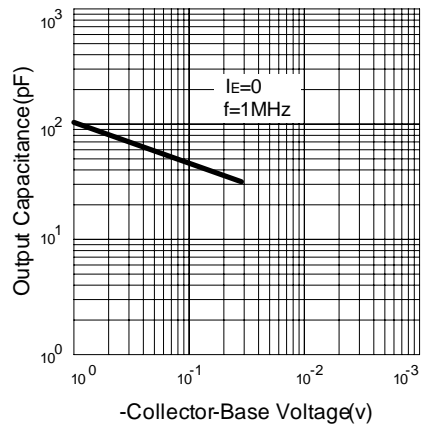


Fig.5 Current gain-bandwidth product


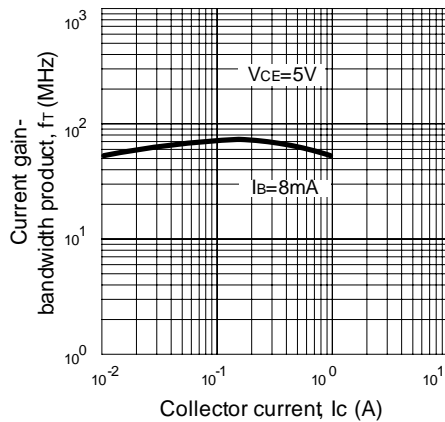


Fig.6 Safe Operating Area

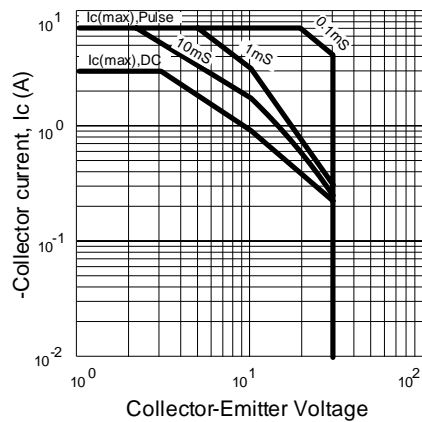

■ TYPICAL CHARACTERISTICS(cont.)

Fig.7 DC current gain


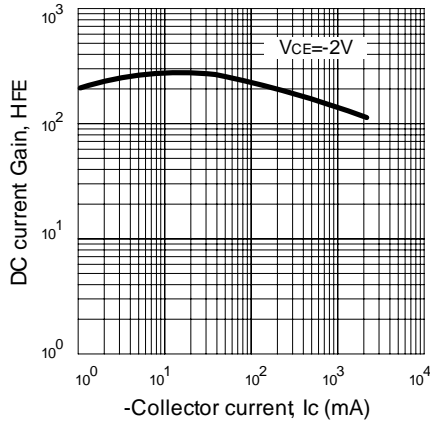


Fig.8 Saturation Voltage

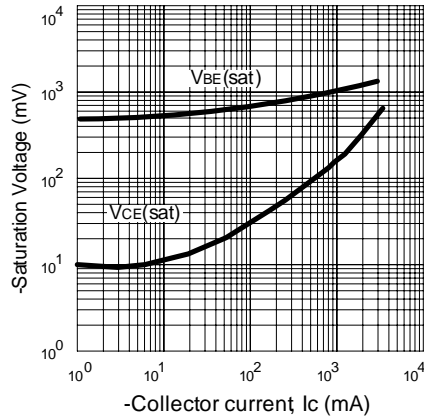

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.