

### Technical Data

**32S12 Series**



#### Description

The 32S12 Series is a micro-miniature, plastic-molded, surface mountable version of the 32.768 kHz tuning fork-type quartz crystal. The crystal is housed in a rugged, high-temperature tubular holder, then mounted to a leadframe and injection molded into its plastic carrier. Two sizes and two lead connection configurations are available.

#### Applications & Features

- Very small, compact packaging
- Rugged, plastic-molded design, resistant to shock and vibration
- Excellent resistance to heat shock and environmental characteristics
- Ideally suited for automated pick-and-place assembly environments
- Available on tape and reel
- Ideal for portable applications, time of day clocks, communication equipment, pagers, cellular telephones, camcorders, and micro computers


#### Electrical Specifications

Nominal Frequency @ 25°C – F	32.768 kHz
Frequency Tolerance	±20 ppm
Turnover Temperature – T <sub>O</sub>	+25°C ±5°C
Temperature Coefficient – K	$(-3.5 \pm 0.8) \times 10^{-8} / ^\circ\text{C}^2$
Load Capacitance – C <sub>L</sub>	12.5 pF standard
Equivalent Series Resistance – R <sub>S</sub>	50KΩ max
Shunt Capacitance – C <sub>0</sub>	1.0 pF, typ
Recommended Drive Level - Pd	0.1μW
Maximum Drive Level – Pd <sub>MAX</sub>	1μW max
Aging – ΔF / f ( 1st year @ 25°C ±3°C)	±5 ppm, max
Operating Temp. Range	-40 to +85°C
Storage Temp. Range	-55 to +125°C

#### Environmental / Process Specifications

High Temperature Storage:	Less than ±5 ppm change after 500H at 80°C
Low Temperature Storage:	Less than ±5 ppm change after 500H at -30°C
Thermal Shock:	Less than ±5 ppm change at 25°C after -25 to +80°C 20 cycles each 1 H
Shock:	MIL-STD-883, Method 2002, Condition B
Resistance to Soldering Heat:	MIL-STD-202, Method 210, Condition I or J Maximum of two (2) reflow passes
Solderability:	MIL-STD-883, Method 2003
Terminal Strength:	Will withstand pull weight of 500 grams, 30 seconds maximum


#### Part Numbering Guide

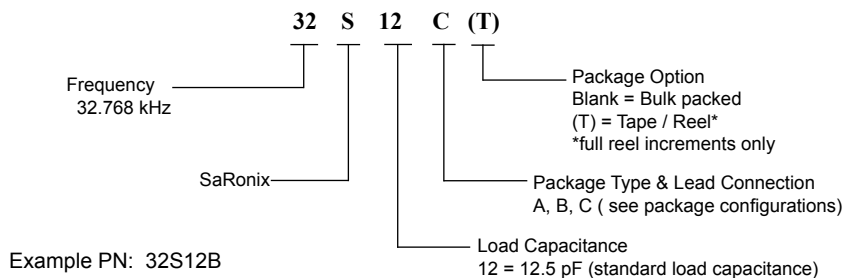


**Technical Data**

**32S12 Series**


**Package Details**

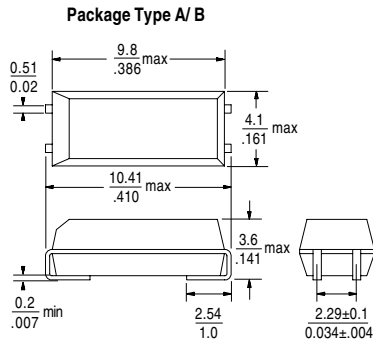


**SOLDER PATTERN**

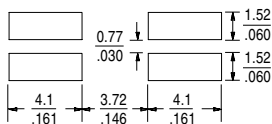

**Package Type C**

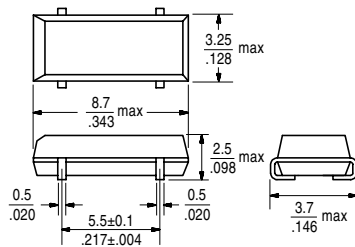


**SOLDER PATTERN**




Tolerance:  $\pm .13$   
 $\pm .005$

Scale: None (Dimensions in  $\frac{\text{mm}}{\text{inches}}$ )


**Marking Format**

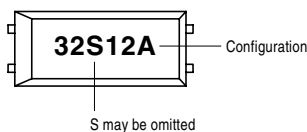




**Frequency vs. Temperature Characteristics**

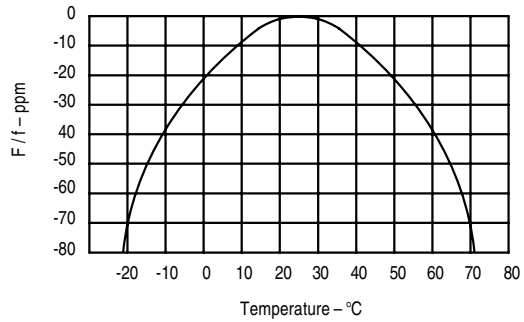

**Solder Reflow Guide**

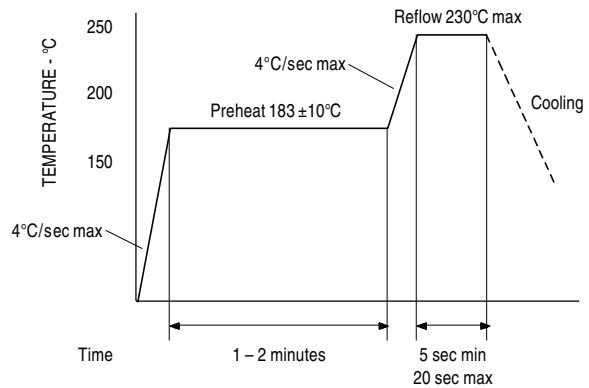

**Lead Configurations**



**\*\*Note:** for package A and C options, pins #2 and #3 provide mechanical support only. Do not connect to circuit.

All specifications are subject to change without notice.