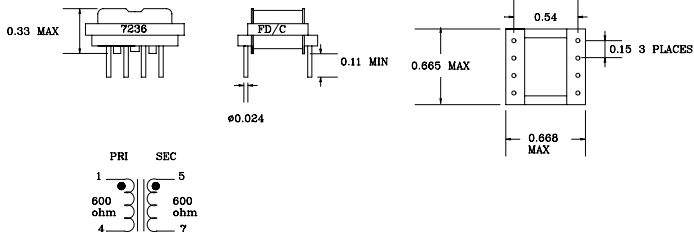


- Coupling Transformer
- 600 Ω to 600 Ω


MECHANICAL AND SCHEMATIC (All dimensions in inches)

ELECTRICAL SPECIFICATION @ 25°C

P/N	Primary Impedance	Secondary Impedance	Power Level	Insertion Loss	Frequency Response	DC Unbalance (mA)	Longitudinal Balance	D.C.R		Hipot Vrms (1 min)	
								Ω +/-20%	Ω +/-20%	1-4 to 5-7	1-4 to core
7236	600 Ω	600 Ω	-45 dBm to +7 dBm	1.4 dB	300 Hz to 4 kHz 0 dBm (TYP)	0	200 Hz to 4kHz (MIN)	76	135	1500	1000

Total harmonic Distortion 0.5% Max @300 Hz 0 dBm