



Data Sheet

Typical Performance

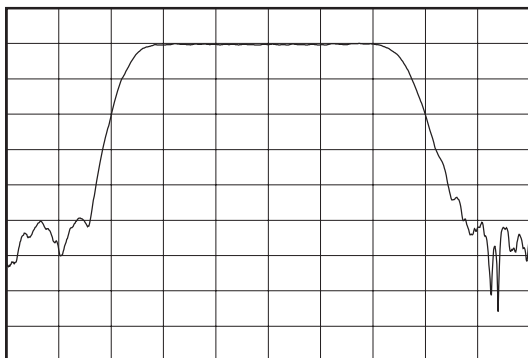

Horizontal: 2.5 MHz/Div
 Vertical: 10 dB/Div

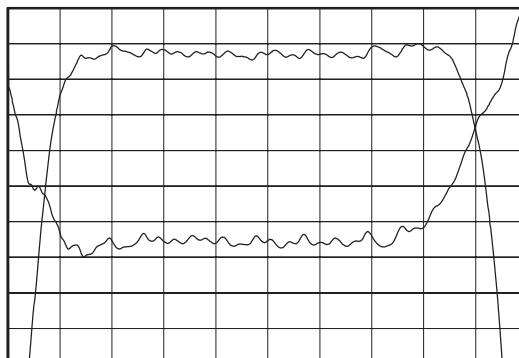


Horizontal: 1.5 MHz/Div
 Vertical: 1 dB/Div
 Vertical: 5 deg/Div


Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	69.8	70	70.2
Insertion Loss at F_0	dB	-	11.5	12.5
1 dB Bandwidth	MHz	11.45	11.65	-
3 dB Bandwidth	MHz	12	12.5	-
40 dB Bandwidth	MHz	-	17.35	18.25
Passband Ripple	dB	-	0.6	1
Phase Linearity 90% of 3dB Bandwidth	deg	-	9	11.5
Group Delay Variation 90% of 3dB Bandwidth	nsec	-	70	90
Absolute Delay	μsec	-	1.08	-
Substrate Material	-	-	YZ LiNbO ₃	-
Temperature Coefficient	ppm/°C	-	-94	-
Ambient Temperature	°C	-	25	-

Package Outline

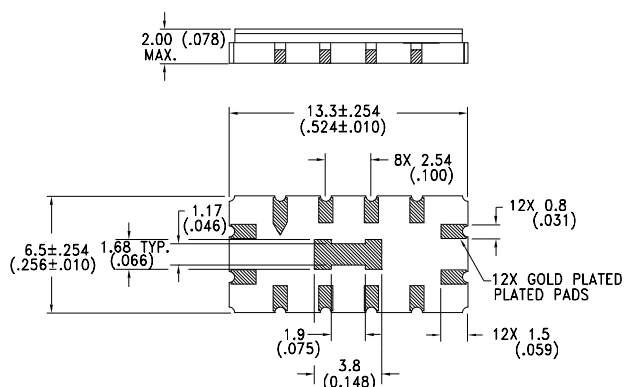

Matching Configuration

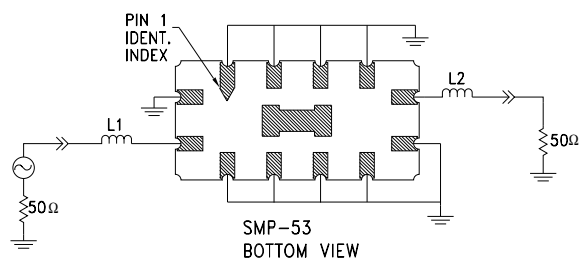

L1 = 120nH, L2 = 120nH
 Nominal Source/Load Impedance = 50Ω
 Package Style SMP-53

11/29/99