



# TO-220 Plastic-Encapsulate Voltage Regulator

## CJ7806 Three-terminal positive voltage regulator


### FEATURES

Maximum Output current  $I_{OM}$ : 1.5 A

Output voltage  $V_o$ : 6 V

Continuous total dissipation

$P_D$ : 2 W ( $T_J=25^\circ\text{C}$ )

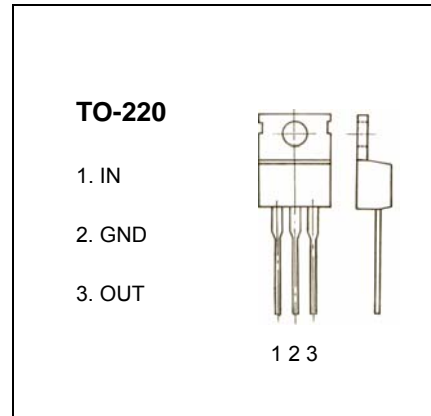

### ABSOLUTE MAXIMUM RATINGS(operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	$V_i$	35	V
Thermal resistance junction-air	$R_{\theta JA}$	65	$^\circ\text{C}/\text{W}$
Thermal resistance junction-cases	$R_{\theta JC}$	5	$^\circ\text{C}/\text{W}$
Operating Junction Temperature Range	$T_{OPR}$	0-150	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-65-150	$^\circ\text{C}$

### ELECTRICAL CHARACTERISTICS( $V_i=11\text{V}, I_o=500\text{mA}, 0^\circ\text{C}<T_J<125^\circ\text{C}, C_i=0.33\mu\text{F}, C_o=0.1\mu\text{F}$ , unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	$V_o$	$T_J=25^\circ\text{C}$	5.75	6	6.25	V
		$8\text{V}\leq V_i\leq 21\text{V}, I_o=5\text{mA}-1\text{A}, P\leq 15\text{W}$	5.7	6	6.3	V
Load Regulation	$\Delta V_o$	$T_J=25^\circ\text{C}, I_o=5\text{mA}-1.5\text{A}$		14	120	mV
		$T_J=25^\circ\text{C}, I_o=250\text{mA}-750\text{mA}$		4	60	mV
Line regulation	$\Delta V_o$	$8\text{V}\leq V_i\leq 25\text{V}, T_J=25^\circ\text{C}$		5	120	mV
		$9\text{V}\leq V_i\leq 13\text{V}, T_J=25^\circ\text{C}$		1.5	60	mV
Quiescent Current	$I_q$	$T_J=25^\circ\text{C}$		4.3	8	mA
Quiescent Current Change	$\Delta I_q$	$8\text{V}\leq V_i\leq 25\text{V}$			1.3	mA
		$5\text{mA}\leq I_o\leq 1\text{A}$			0.5	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o=5\text{mA}$		-0.8		$\text{mV}/^\circ\text{C}$
Output Noise Voltage	$V_N$	$10\text{Hz}\leq f\leq 100\text{KHz}$		45		$\mu\text{V}$
Ripple Rejection	RR	$9\text{V}\leq V_i\leq 19\text{V}, f=120\text{Hz}, T_J=0-125^\circ\text{C}$	59	75		dB
Dropout Voltage	$V_d$	$T_J=25^\circ\text{C}, I_o=1\text{A}$		2		V
Output resistance	$R_o$	$f=1\text{KHz}$		19		$\text{m}\Omega$
Short Circuit Current	$I_{sc}$	$V_i=35\text{V}, T_J=25^\circ\text{C}$		550		mA
Peak Current	$I_{pk}$	$T_J=25^\circ\text{C}$		2.2		A

### TYPICAL APPLICATION

