


**SCR/Diode
POW-R-BLOK™ Modules
55 Amperes/1200-1600 Volts**



Outline Drawing

| Dimension | Inches | Millimeters |
|-----------|------------|-------------|
| A | 3.681 Max. | 93.5 Max. |
| B | 3.150 | 80 |
| C | 1.181 Max. | 30 Max. |
| D | 1.024 Max. | 26 Max. |
| E | 0.906 | 23 |
| F | 0.827 | 21 |
| G | 0.650 | 16.5 |
| H | 0.512 | 13 |
| J | 0.354 | 9 |
| K | 0.256 | 6.5 |
| L | 0.256 Dia. | Dia. 6.5 |
| M | M5 Metric | M5 |

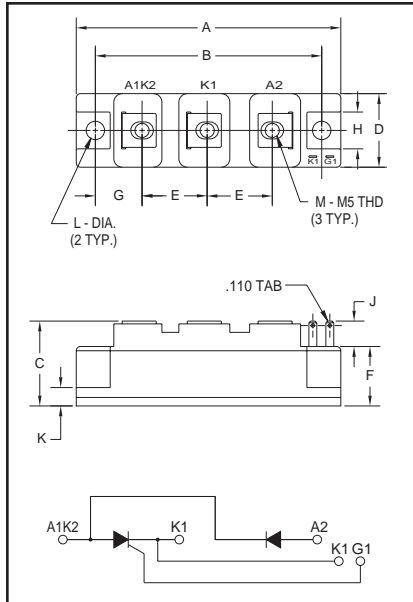

**CM421255, CM421655
SCR/Diode
POW-R-BLOK™ Modules
55 Amperes/1200-1600 Volts**

Description:

Powerex SCR/Diode POW-R-BLOK™ Modules are designed for use in applications requiring Half-Control and isolated packaging. The modules are isolated for easy mounting with other components on common heatsinks.

Features:

- Isolated Mounting
- Glass Passivated Chips
- Metal Baseplate
- Low Thermal Impedance

Applications:

- Battery Supplies
- Bridge Circuits
- AC and DC Motor Control
- Tap Changers
- Lighting Control

Ordering Information:

Select the complete eight digit module part number you desire from the table below. Example: CM421255 is a 1200 Volt, 55 Ampere SCR/Diode POW-R-BLOK™ Module.

| Type | Voltage Volts (x100) | Current Rating Amperes (55) |
|------|-------------------------|--------------------------------|
| CM42 | 12 16 | 55 |



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

CM421255, CM421655
SCR/Diode POW-R-BLOK™ Modules
55 Amperes/1200-1600 Volts

Absolute Maximum Ratings










| Characteristics | Symbol | CM421255 | CM421655 | Units |
|---|--------------------------|------------|------------|------------------|
| Peak Forward Blocking Voltage | V_{DRM} | 1200 | 1600 | Volts |
| Transient Peak Forward Blocking Voltage (Non-Repetitive), $t < 5ms$ | V_{DSM} | 1350 | 1700 | Volts |
| DC Forward Blocking Voltage | $V_{D(DC)}$ | 960 | 1280 | Volts |
| Peak Reverse Blocking Voltage | V_{RRM} | 1200 | 1600 | Volts |
| Transient Peak Reverse Blocking Voltage (Non-Repetitive), $t < 5ms$ | V_{RSM} | 1350 | 1700 | Volts |
| DC Reverse Blocking Voltage | $V_{R(DC)}$ | 960 | 1280 | Volts |
| RMS On-State Current | $I_{T(RMS)}, I_{F(RMS)}$ | 86 | 86 | Amperes |
| Average On-State Current, $T_C = 81^\circ C$ | $I_{T(AV)}, I_{F(AV)}$ | 55 | 55 | Amperes |
| Peak One-Cycle Surge (Non-Repetitive) On-State Current (60Hz) | I_{TSM}, I_{FSM} | 1100 | 1100 | Amperes |
| Peak One-Cycle Surge (Non-Repetitive) On-State Current (50Hz) | I_{TSM}, I_{FSM} | 1000 | 1000 | Amperes |
| I^2t (for Fusing), 8.3 milliseconds | I^2t | 5000 | 5000 | A^2sec |
| Critical Rate-of-Rise of On-State Current* | di/dt | 100 | 100 | Amperes/ μs |
| Peak Gate Power Dissipation | P_{GM} | 5.0 | 5.0 | Watts |
| Average Gate Power Dissipation | $P_{G(AV)}$ | 0.5 | 0.5 | Watts |
| Peak Forward Gate Voltage | V_{GFM} | 10 | 10 | Volts |
| Peak Reverse Gate Voltage | V_{GRM} | 5.0 | 5.0 | Volts |
| Peak Forward Gate Current | I_{GFM} | 2.0 | 2.0 | Amperes |
| Storage Temperature | T_{STG} | -40 to 125 | -40 to 125 | $^\circ C$ |
| Operating Temperature | T_j | -40 to 125 | -40 to 125 | $^\circ C$ |
| Maximum Mounting Torque M6 Mounting Screw | — | 26 | 26 | in.-lb. |
| Maximum Mounting Torque M5 Terminal Screw | — | 17 | 17 | in.-lb. |
| Module Weight (Typical) | — | 160 | 160 | Grams |
| V Isolation | V_{RMS} | 2500 | 2500 | Volts |

* $T_j = 125^\circ C$, $I_G = 0.5A$, $V_D = 1/2 V_{DRM}$

Electrical and Thermal Characteristics, $T_j = 25^\circ C$ unless otherwise specified


| Characteristics | Symbol | Test Conditions | CM421255/CM421655 | Units |
|---|-------------------|--|-------------------|-----------------|
| Blocking State Maximums | | | | |
| Forward Leakage Current, Peak | I_{DRM} | $T_j = 125^\circ C$, $V_{DRM} = \text{Rated}$ | 10 | mA |
| Reverse Leakage Current, Peak | I_{RRM} | $T_j = 125^\circ C$, $V_{RRM} = \text{Rated}$ | 10 | mA |
| Conducting State Maximums | | | | |
| Peak On-State Voltage | V_{FM}, V_{TM} | $I_{FM} = 165A$, $I_{TM} = 165A$ | 1.5 | Volts |
| Switching Minimums | | | | |
| Critical Rate-of-Rise of Off-State Voltage | dv/dt | $T_j = 125^\circ C$, $V_D = 2/3 V_{DRM}$ | 500 | Volts/ μs |
| Thermal Maximums | | | | |
| Thermal Resistance, Junction-to-Case | $R_{\theta(J-C)}$ | Per Module | 0.8 | $^\circ C/Watt$ |
| Thermal Resistance, Case-to-Sink (Lubricated) | $R_{\theta(C-S)}$ | Per Module | 0.2 | $^\circ C/Watt$ |
| Gate Parameters Maximums | | | | |
| Gate Current-to-Trigger | I_{GT} | $V_D = 6V$, $R_L = 2\Omega$ | 100 | mA |
| Gate Voltage-to-Trigger | V_{GT} | $V_D = 6V$, $R_L = 2\Omega$ | 2.0 | Volts |
| Non-Triggering Gate Voltage | V_{GDM} | $T_j = 125^\circ C$, $V_D = 1/2 V_{DRM}$ | 0.25 | Volts |

CM421255, CM421655
SCR/Diode POW-R-BLOK™ Modules
 55 Amperes/1200-1600 Volts

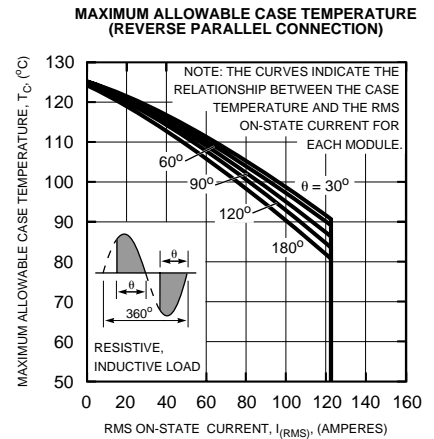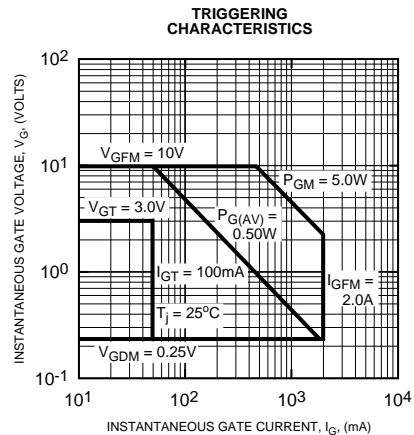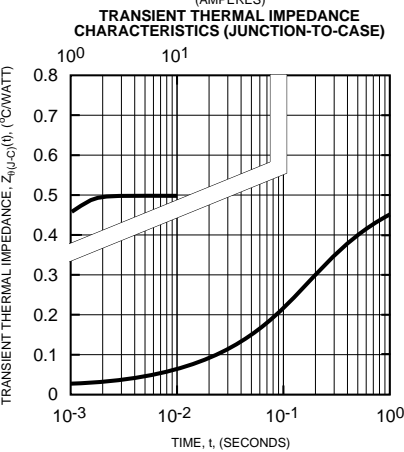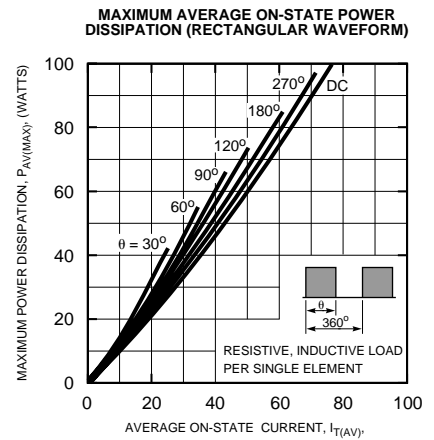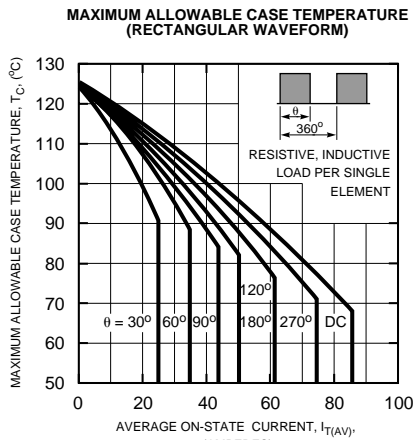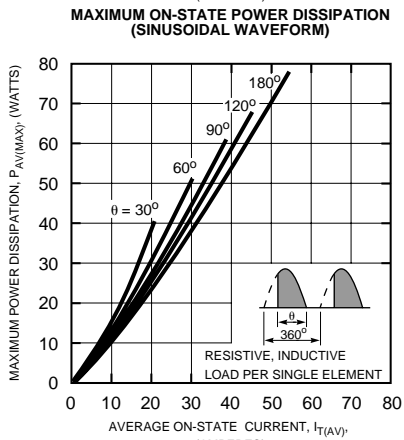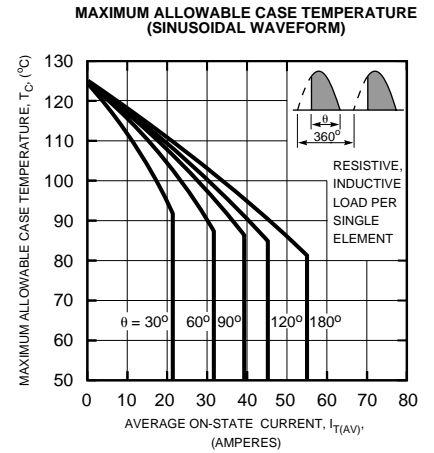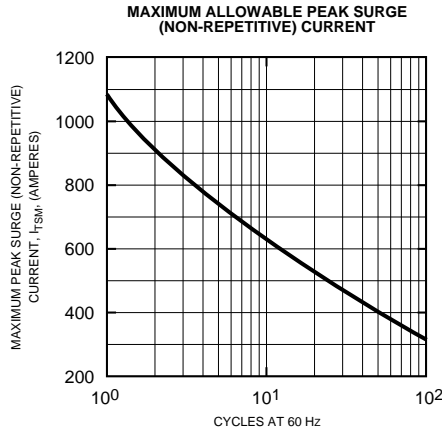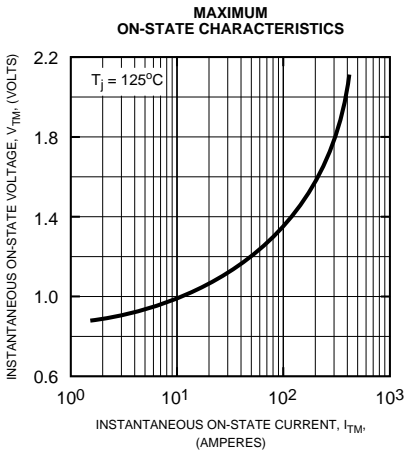


CM421255, CM421655
SCR/Diode POW-R-BLOK™ Modules
 55 Amperes/1200-1600 Volts

**MAXIMUM ON-STATE POWER DISSIPATION
 (REVERSE PARALLEL CONNECTION)**

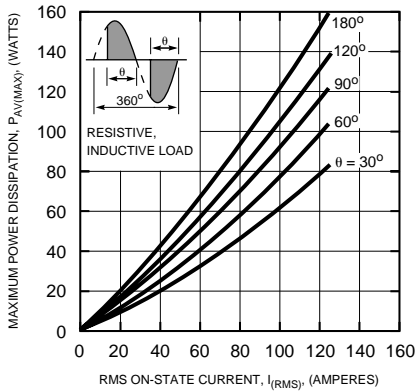


NOTE: THE CURVES INDICATE THE RELATIONSHIP BETWEEN THE AVERAGE ON-STATE POWER DISSIPATION PER MODULE AND THE RMS ON-STATE CURRENT.

**MAXIMUM ALLOWABLE CASE TEMPERATURE
 (SINGLE PHASE BRIDGE CONNECTION)**

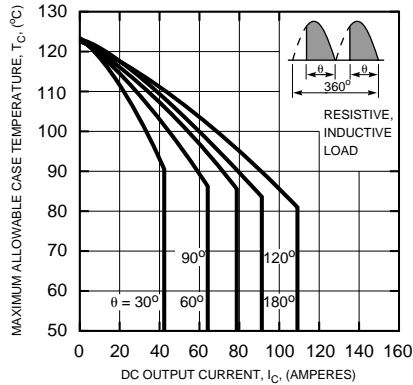


NOTE: THE CURVES INDICATE THE RELATIONSHIP BETWEEN THE CASE TEMPERATURE AND THE DC OUTPUT CURRENT (FOR TWO ELEMENTS) WHEN USED IN THE SINGLE PHASE BRIDGE CONFIGURATION.

**MAXIMUM ON-STATE POWER DISSIPATION
 (SINGLE PHASE BRIDGE CONNECTION)**

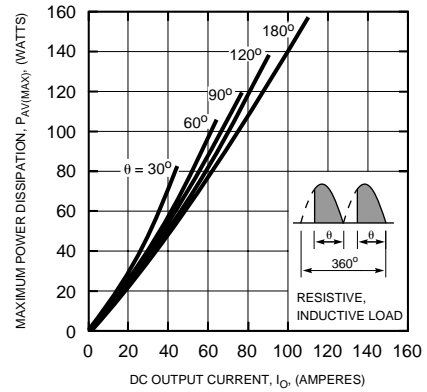


NOTE: THE CURVES INDICATE THE RELATIONSHIP BETWEEN THE AVERAGE ON-STATE POWER DISSIPATION AND THE DC OUTPUT CURRENT FOR THE SINGLE PHASE BRIDGE CONFIGURATION (POWER DISSIPATION EXPRESSED FOR EACH MODULE AND DC OUTPUT CURRENT EXPRESSED FOR THE PAIR)

**MAXIMUM ALLOWABLE CASE TEMPERATURE
 (THREE PHASE BRIDGE CONNECTION)**

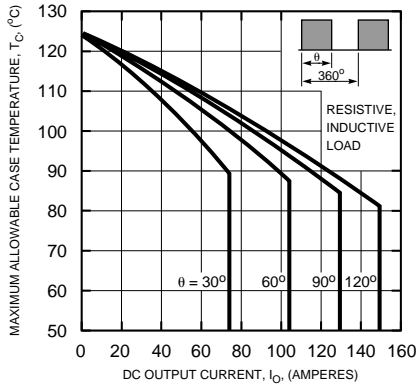

NOTE: THE CURVES INDICATE THE RELATIONSHIP BETWEEN THE CASE TEMPERATURE AND THE DC OUTPUT CURRENT (FOR THREE MODULES) IN THE THREE PHASE CONFIGURATION.

**MAXIMUM ON-STATE POWER DISSIPATION
 (THREE PHASE BRIDGE CONNECTION)**

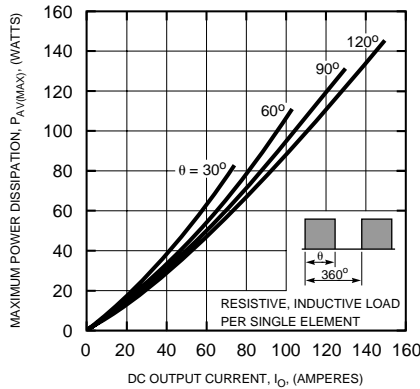

NOTE: THE CURVES INDICATE THE RELATIONSHIP BETWEEN THE ON-STATE POWER DISSIPATION (PER MODULE) AND THE DC OUTPUT CURRENT (FOR THREE MODULES) IN THE THREE PHASE BRIDGE CONFIGURATION.